

ATEVA® 3325ACX

Product information

Vinyl acetate content 33 %

Rheological properties

Melt Flow Index	43 g/10min	ASTM D 1238
Temperature	190 °C	
Load	2.16 kg	

Typical mechanical properties

Tensile Strength	9 MPa	ASTM D 638
Elongation at break	900 %	ASTM D 638
Flexural Modulus	7 MPa	ASTM D 790
Shore A hardness	68	ASTM D 2240
Shore D hardness	16	ASTM D 2240

Thermal properties

Melting temperature	60 °C	ASTM D 3418
Ring and ball softening point	113 °C	ASTM E 28


Other properties

Density 952 kg/m³



ATEVA® 3325ACX

Stress-strain

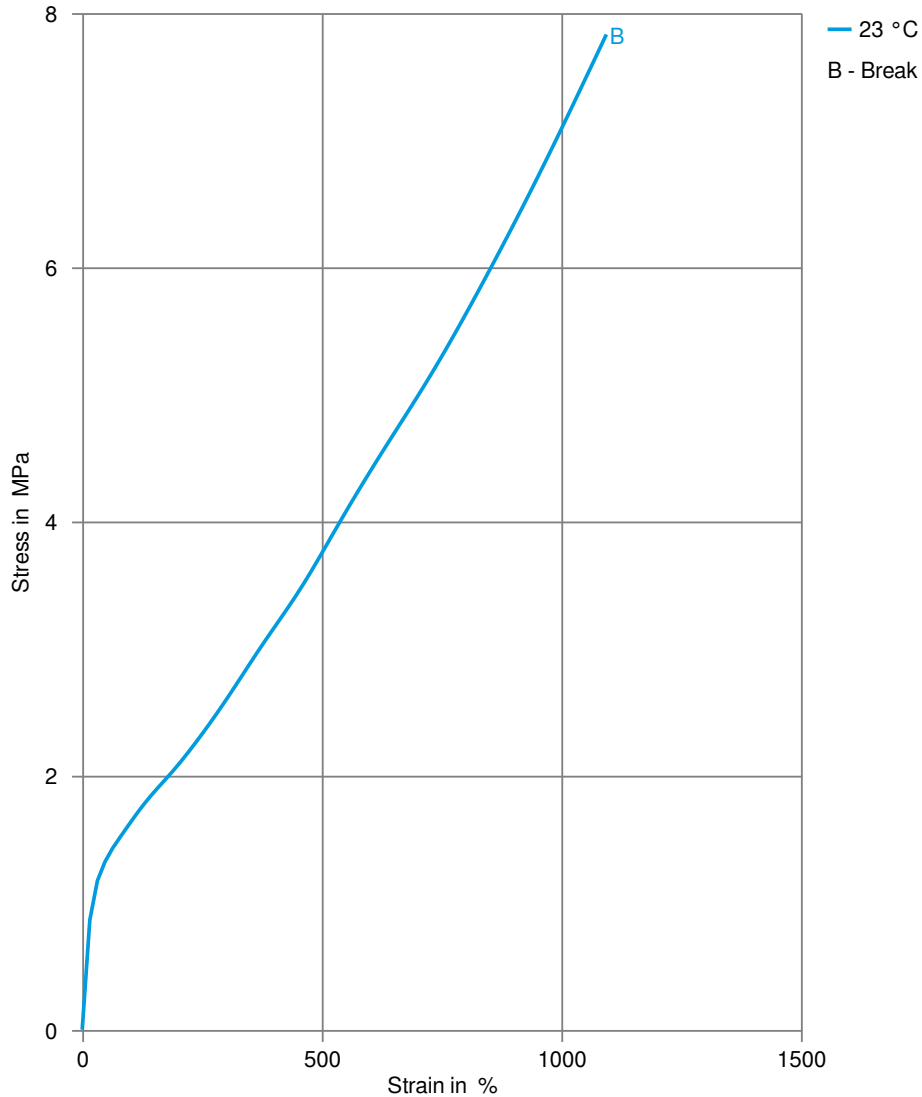

ATEVA® 3325ACX

Secant modulus-strain

