

ATEVA® 4030ACG

Product information

Vinyl acetate content 40 %

Rheological properties

Melt Flow Index	55 g/10min	ASTM D 1238
Temperature	190 °C	
Load	2.16 kg	

Typical mechanical properties

Tensile Strength	5 MPa	ASTM D 638
Elongation at break	>1150 %	ASTM D 638
Flexural Modulus	1.9 MPa	ASTM D 790
Shore A hardness	53	ASTM D 2240

Thermal properties

Melting temperature	52 °C	ASTM D 3418
Ring and ball softening point	107 °C	ASTM E 28


Other properties

Density 962 kg/m³



ATEVA® 4030ACG

Stress-strain

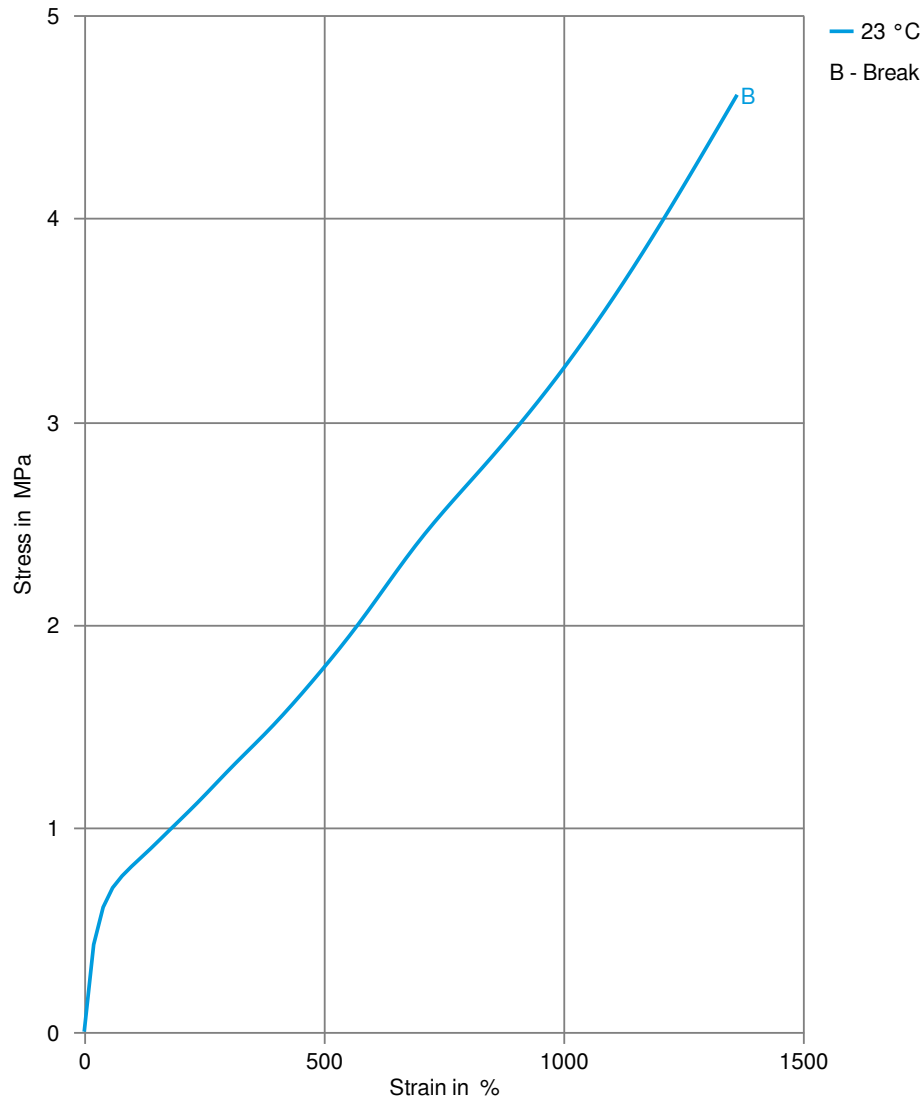

ATEVA® 4030ACG

Secant modulus-strain

