

VECTRA® MT® 4310

30% glass fiber, excellent flow, high temperature capability

Vectra® MT4310 VF3001 (natural) is a 30% glass reinforced high flow, LCP grade for injection molding.

Vectra® MT4310 VF3001 (natural) is a special grade developed for medical industry applications and complies with:

- Food Contact Substance Notification (FCN) No. 742 of the Food and Drug Administration (FDA) and is listed in the Drug Master File (DMF 8464) and the Device Master File (MAF 315)
- the corresponding EU and national registry regulatory requirements
- biocompatibility in tests corresponding to USP 23 Class VI/ISO 10993
- low residual monomers
- no animal products

Highest temperature capability

Easiest flow

Suitable where very thin walls are required

Used for broad range of SMT applications, with minimal dimensional change

Chemical abbreviation according to ISO 1043-1 : LCP

Inherently flame retardant

Rheological properties

Moulding shrinkage range, parallel	0.1 %	ISO 294-4, 2577
Moulding shrinkage range, normal	0.5 %	ISO 294-4, 2577

Typical mechanical properties

Tensile Modulus	16000 MPa	ISO 527-1/-2
Stress at break, 5mm/min	160 MPa	ISO 527-1/-2
Strain at break, 5mm/min	1.6 %	ISO 527-1/-2
Flexural Modulus	16000 MPa	ISO 178
Flexural Strength	225 MPa	ISO 178
Compressive modulus	14000 MPa	ISO 604
Compressive stress at 1% strain	93 MPa	ISO 604
Charpy notched impact strength, 23°C	40 kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	30 kJ/m ²	ISO 180/1A
Hardness, Rockwell, M-scale	71	ISO 2039-2

Thermal properties

Melting temperature, 10°C/min	335 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	276 °C	ISO 75-1/-2
Temp. of deflection under load, 8 MPa	216 °C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel	7 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	20 E-6/K	ISO 11359-1/-2



VECTRA® MT® 4310

Flammability

Burning Behav. at thickness h	V-0 class	UL 94
Oxygen index	45 %	ISO 4589-1/-2

Electrical properties

Relative permittivity, 100Hz	4	IEC 62631-2-1
Relative permittivity, 1MHz	3.3	IEC 62631-2-1
Dissipation factor, 100Hz	100 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	250 E-4	IEC 62631-2-1
Volume resistivity	1E13 Ohm.m	IEC 62631-3-1
Surface resistivity	1E14 Ohm	IEC 62631-3-2
Electric strength	32 kV/mm	IEC 60243-1
Comparative tracking index	PLC 3 PLC	UL 746A
Arc Resistance	140 s	Internal

Other properties

Density	1610 kg/m³	ISO 1183
---------	------------	----------

Injection

Drying Temperature	170 °C	
Drying Time, Dehumidified Dryer	4 - 6 h	
Processing Moisture Content	0.01 %	
Melt Temperature Optimum	340 °C	Internal
Screw tangential speed	0.17 - 0.18 m/s	
Max. mould temperature	80 - 120 °C	
Back pressure	3 MPa	
Injection speed	very fast	

Additional information

Injection molding


A three-zone screw evenly divided into feed, compression, and metering zones is preferred. A higher percentage of feed flights may be needed for smaller machines: 1/2 feed, 1/4 compression, 1/4 metering.

Vectra LCPs are shear thinning, their melt viscosity decreases quickly as shear rate increases. For parts that are difficult to fill, the mold can increase the injection velocity to improve melt flow.




VECTRA® MT® 4310

Stress-strain

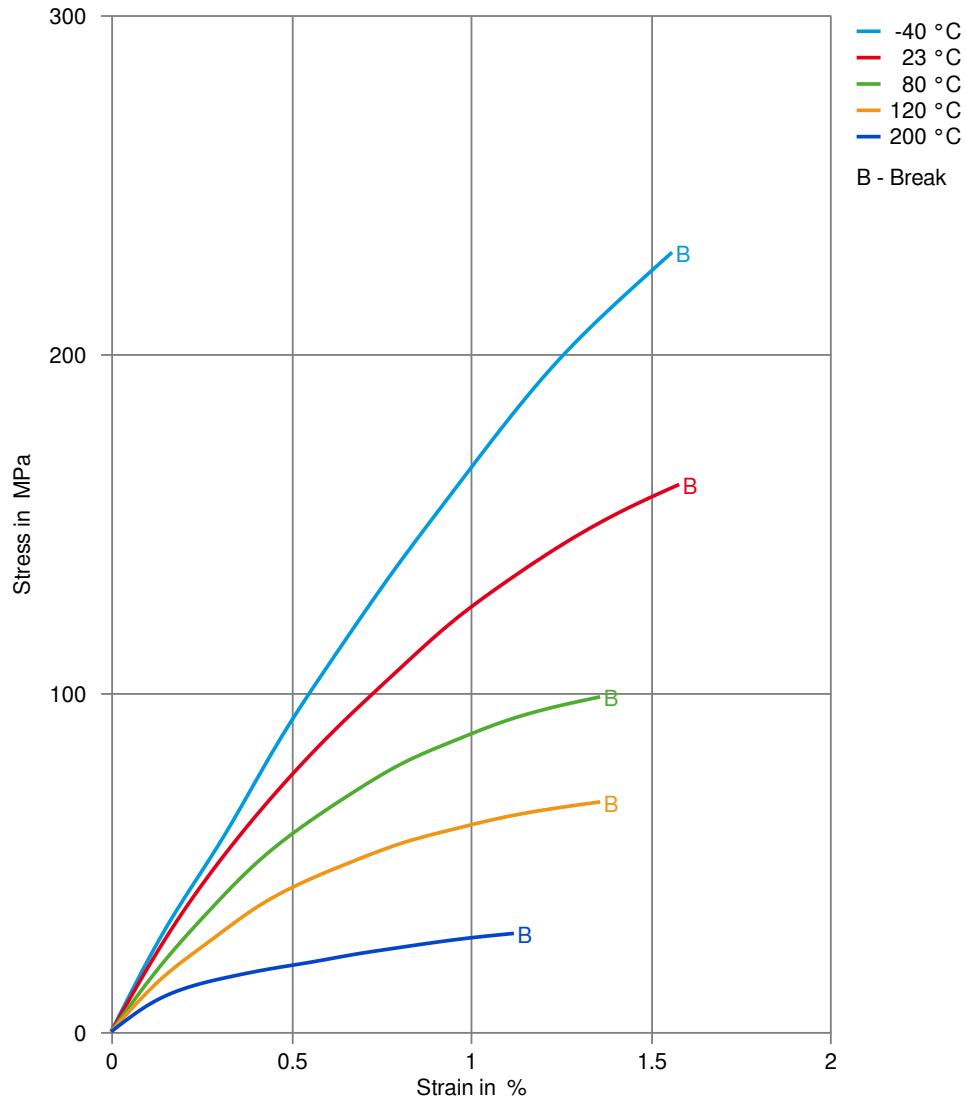

VECTRA® MT® 4310

Secant modulus-strain

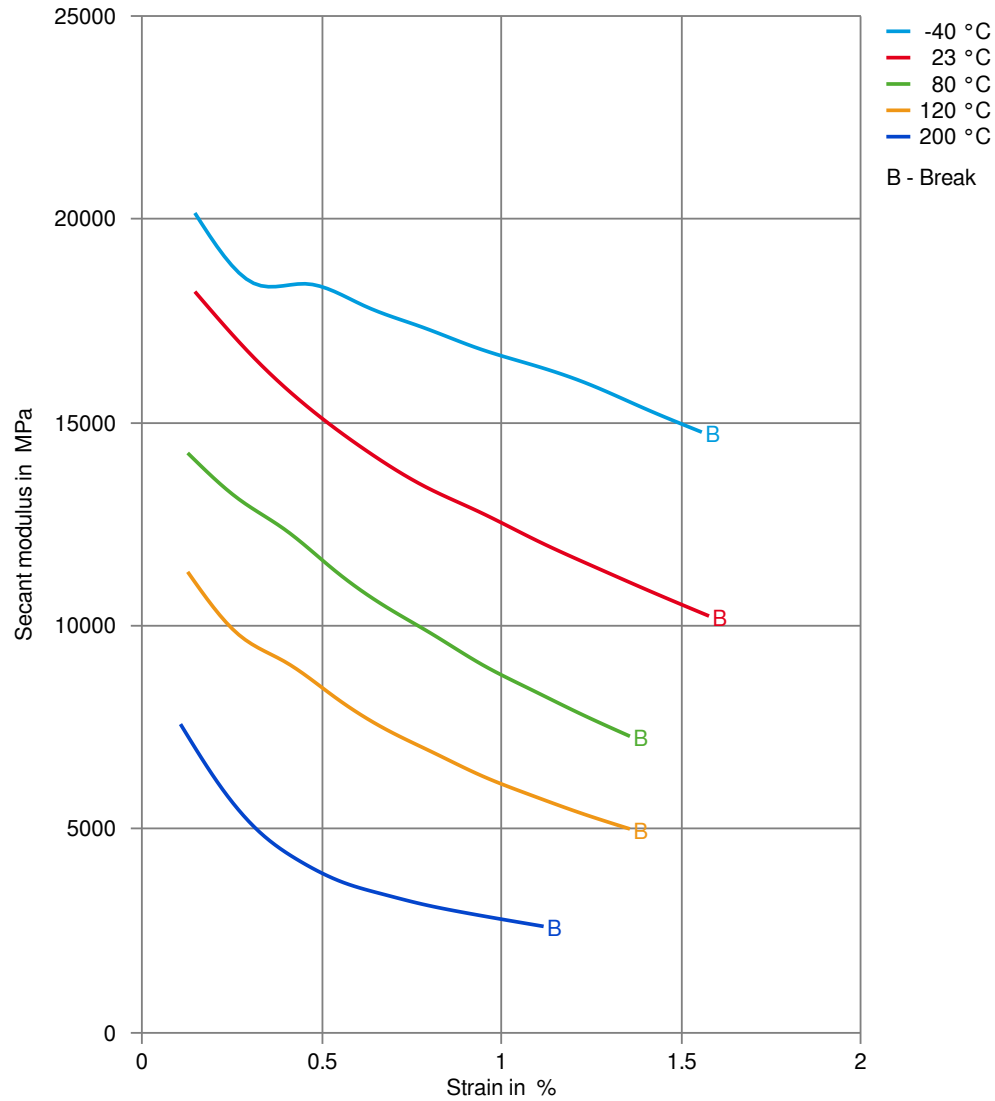

VECTRA® MT® 4310

Processing Texts

Pre-drying

VECTRA should in principle be predried. Because of the necessary low maximum residual moisture content the use of dry air dryers is recommended. The dew point should be $\leq -40^{\circ}\text{C}$. The time between drying and processing should be as short as possible.

Longer pre-drying times/storage

For subsequent storage of the material in the dryer until processed the temperature does not need to be lowered for grades A, B, C, D and V ($\leq 24\text{ h}$).

Injection molding

A three-zone screw evenly divided into feed, compression, and metering zones is preferred. A higher percentage of feed flights may be needed for smaller machines: 1/2 feed, 1/4 compression, 1/4 metering.

Vectra LCPs are shear thinning, their melt viscosity decreases quickly as shear rate increases. For parts that are difficult to fill, the molder can increase the injection velocity to improve melt flow.

Injection molding Preprocessing

Vectra resins are well known for their excellent thermal and hydrolytic stability. In order to ensure these properties are optimum, the resin should be dried correctly prior to processing. Vectra LCP MT4310 and MT4350 should be dried at 150°C for a minimum of 6 hours or at 170°C for a minimum of 4 hours in a desiccant dryer.

