

Zytel® HTN330 NC010

HIGH PERFORMANCE POLYAMIDE RESIN

Zytel® HTN330 NC010 is an unreinforced, transparent high performance polyamide resin. It is also a PPA resin.

Product information

Resin Identification	PA	ISO 1043
Part Marking Code	>PA<	ISO 11469
ISO designation	ISO 16396-PA,,M1G1NT,S10-030	

Rheological properties

	dry/cond.		
Moulding shrinkage, parallel	0.5 / -	%	ISO 294-4, 2577
Moulding shrinkage, normal	0.5 / -	%	ISO 294-4, 2577

Typical mechanical properties

	dry/cond.		
Tensile Modulus	2800 / -	MPa	ISO 527-1/-2
Yield stress, 50mm/min	95 / -	MPa	ISO 527-1/-2
Yield strain, 50mm/min	5 / -	%	ISO 527-1/-2
Charpy impact strength, 23°C	180 / -	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	180 / -	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	6 / -	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	4.5 / -	kJ/m ²	ISO 179/1eA
Puncture - maximum force, 23°C	5000 / -	N	ISO 6603-2
Puncture energy, 23°C	60 / -	J	ISO 6603-2
Poisson's ratio	0.37 / -		

Thermal properties

	dry/cond.		
Glass transition temperature, 10°C/min	140 / 100	°C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	120 / *	°C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	130 / *	°C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel	62 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	60 / *	E-6/K	ISO 11359-1/-2
RTI, electrical, 0.75mm	90	°C	UL 746B
RTI, electrical, 1.5mm	90	°C	UL 746B
RTI, electrical, 3mm	90	°C	UL 746B
RTI, impact, 0.75mm	65	°C	UL 746B
RTI, impact, 1.5mm	65	°C	UL 746B
RTI, impact, 3mm	65	°C	UL 746B
RTI, strength, 0.75mm	90	°C	UL 746B
RTI, strength, 1.5mm	90 / *	°C	UL 746B
RTI, strength, 3mm	90	°C	UL 746B



Zytel® HTN330 NC010

HIGH PERFORMANCE POLYAMIDE RESIN

Flammability

	dry/cond.		
Burning Behav. at thickness h	V-2/*	class	UL 94
Thickness tested	0.86/*	mm	UL 94
UL recognition	yes/*		UL 94
FMVSS Class	B		ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<80	mm/min	ISO 3795 (FMVSS 302)

Electrical properties

	dry/cond.		
Relative permittivity, 1MHz	3.7/3.8		IEC 62631-2-1
Dissipation factor, 1MHz	200/200	E-4	IEC 62631-2-1
Volume resistivity	1E13/1E13	Ohm.m	IEC 62631-3-1
Electric strength	29/28	kV/mm	IEC 60243-1
Comparative tracking index	600/-		IEC 60112

Other properties

	dry/cond.		
Humidity absorption, 2mm	4/*	%	Sim. to ISO 62
Water absorption, 2mm	9.6/*	%	Sim. to ISO 62
Density	1180/-	kg/m³	ISO 1183
Luminous transmittance	88	%	ISO 13468-1, -2

Injection


Drying Recommended	yes		
Drying Temperature	80 °C		
Drying Time, Dehumidified Dryer	6 - 10 h		
Processing Moisture Content	≤0.1 %		
Melt Temperature Optimum	300 °C		Internal
Min. melt temperature	280 °C		
Max. melt temperature	320 °C		
Mold Temperature Optimum	80 °C		
Min. mould temperature	70 °C		
Max. mould temperature	95 °C		



Zytel® HTN330 NC010

HIGH PERFORMANCE POLYAMIDE RESIN


Viscosity-shear rate

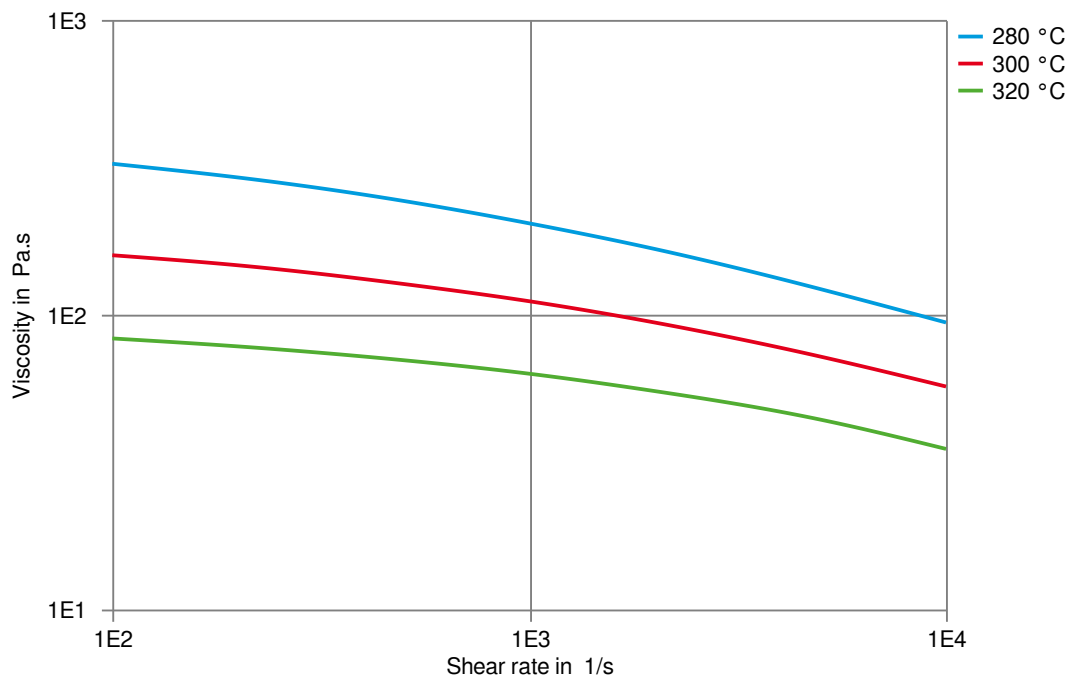

Zytel® HTN330 NC010

HIGH PERFORMANCE POLYAMIDE RESIN


Shearstress-shear rate

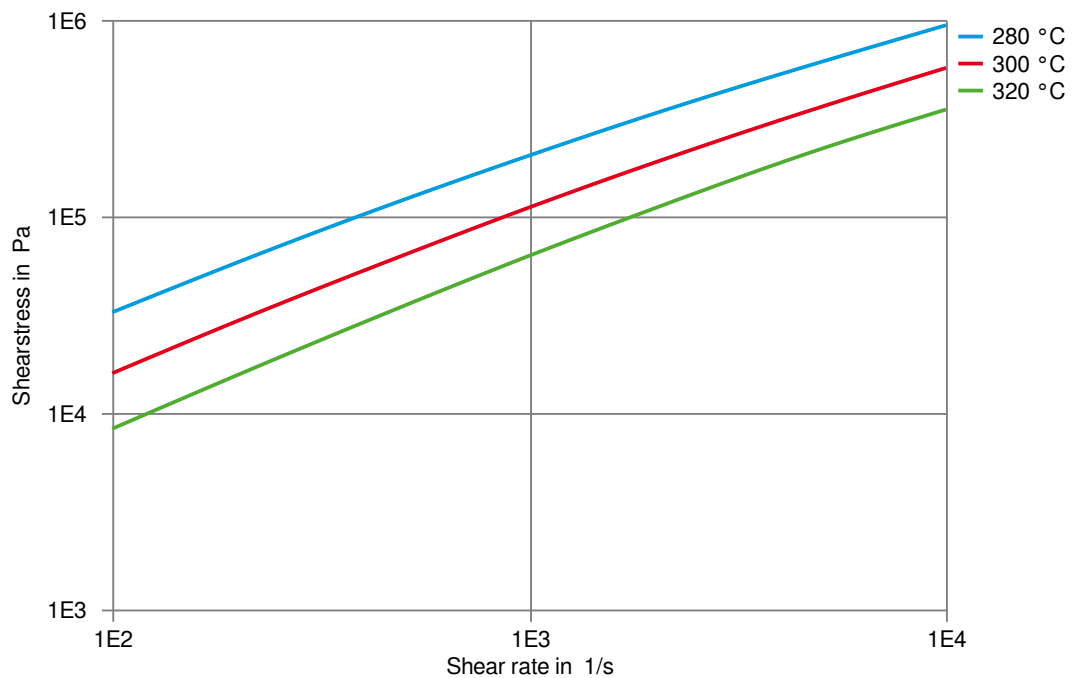

Zytel® HTN330 NC010

HIGH PERFORMANCE POLYAMIDE RESIN


Dynamic Tensile modulus-temperature (dry)

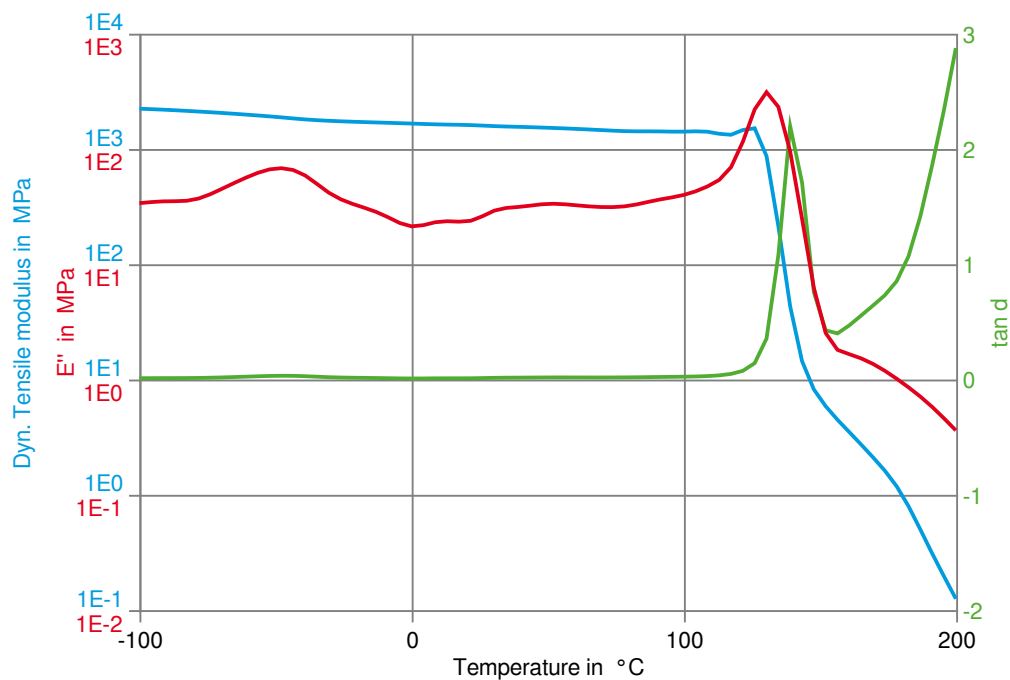

Zytel® HTN330 NC010

HIGH PERFORMANCE POLYAMIDE RESIN


Dynamic Tensile modulus-temperature (cond.)

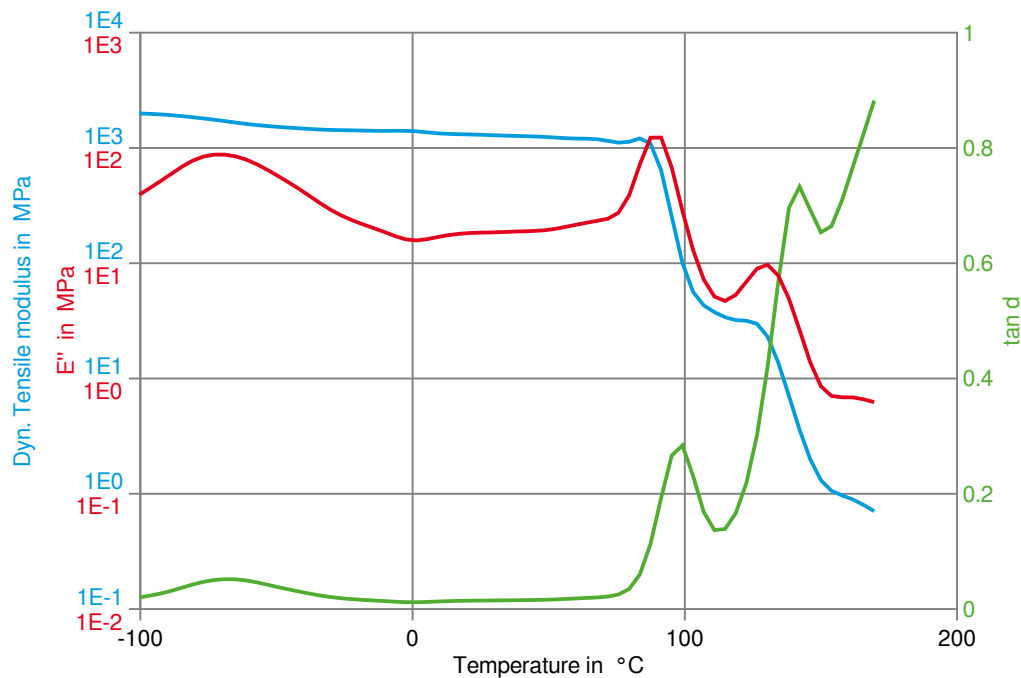

Zytel® HTN330 NC010

HIGH PERFORMANCE POLYAMIDE RESIN

Stress-strain (dry)

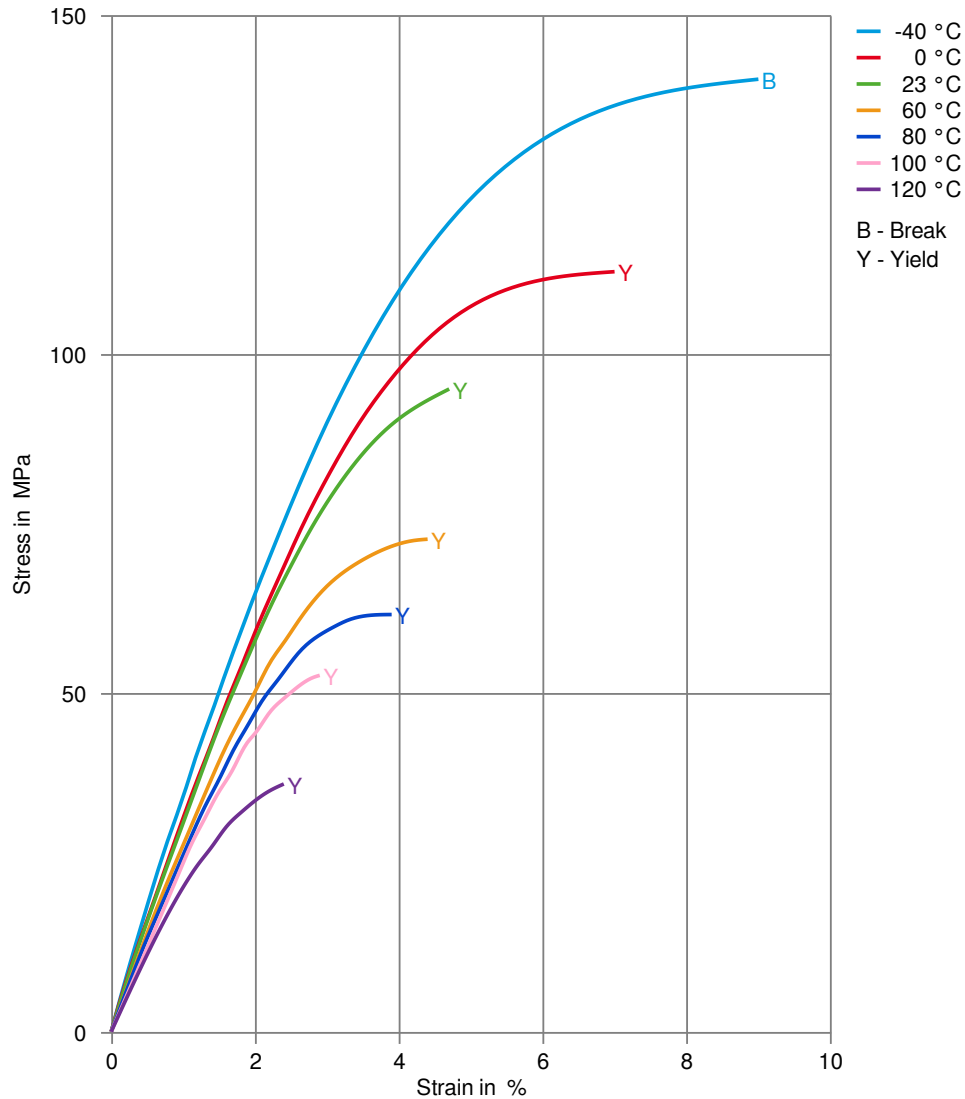

Zytel® HTN330 NC010

HIGH PERFORMANCE POLYAMIDE RESIN

Specific volume-temperature (pvT)

