

ECOMID® ARX H GF50 BK 9005

Polyamide 66 compound, 50% glass fibres reinforced, heat stabilized, improved surface aspect. Based on recycled polymers.

Designed for Automotive industry, suitable for other technical applications that require mechanical performance and long term heat ageing resistance.

Product information

| | | |
|--------------------------------|-------------------|-------------|
| Part Marking Code | >(PA66+PA6)-GF50< | ISO 11469 |
| Continuous Service Temperature | 130 °C | IEC 60216-1 |

Rheological properties

| | | |
|------------------------------------|------------------------|---------------------|
| Viscosity number | 140 cm ³ /g | ISO 307, 1157, 1628 |
| Moulding shrinkage range, parallel | 0.1 - 0.5 % | ISO 294-4, 2577 |
| Moulding shrinkage range, normal | 0.5 - 0.9 % | ISO 294-4, 2577 |

Typical mechanical properties

| | dry/cond. | |
|---------------------------------------|---------------------------|--------------|
| Tensile Modulus | 16300 / 12000 MPa | ISO 527-1/-2 |
| Stress at break, 5mm/min | 200 / 140 MPa | ISO 527-1/-2 |
| Strain at break, 5mm/min | 2.3 / 3.3 % | ISO 527-1/-2 |
| Flexural Modulus | 14500 / - MPa | ISO 178 |
| Flexural Strength | 300 / - MPa | ISO 178 |
| Charpy impact strength, 23°C | 75 / 80 kJ/m ² | ISO 179/1eU |
| Charpy impact strength, -30°C | 45 / - kJ/m ² | ISO 179/1eU |
| Charpy notched impact strength, 23°C | 14 / 16 kJ/m ² | ISO 179/1eA |
| Charpy notched impact strength, -30°C | 8.5 / - kJ/m ² | ISO 179/1eA |
| Ball indentation hardness, H 358/30 | 230 MPa | ISO 2039-1 |

Thermal properties

| | | |
|---|----------|----------------|
| Melting temperature, 10°C/min | 260 °C | ISO 11357-1/-3 |
| Temp. of deflection under load, 1.8 MPa | 235 °C | ISO 75-1/-2 |
| Temp. of deflection under load, 0.45 MPa | 250 °C | ISO 75-1/-2 |
| Coeff. of linear therm. expansion, parallel | 20 E-6/K | ISO 11359-1/-2 |
| Coeff. of linear therm. expansion, normal | 80 E-6/K | ISO 11359-1/-2 |

Other properties

| | | |
|--------------------------|------------------------|----------------|
| Humidity absorption, 2mm | 1.2 % | Sim. to ISO 62 |
| Water absorption, 2mm | 4.1 % | Sim. to ISO 62 |
| Density | 1560 kg/m ³ | ISO 1183 |



ECOMID® ARX H GF50 BK 9005

Injection

Melt Temperature Optimum

275 °C

Internal

Characteristics

Additives

Contains Recycle

Additional information


Injection molding

The following conditions apply to a standard injection molding process. Machine temperatures: barrel 265-290 °C (PA66), 235-270 °C (PA6), nozzle and hot runners up to 300 °C (up to 290 °C products with flame retardants). Mold temperatures: 60-80 °C, (80-100 °C highly reinforced grades). Back pressure: typically, 5-10 bar (hydraulic pressure). Temperatures exceeding 300 °C and long residence time could lead to additives degradation and brittleness of the material. In case of gas generation in the melt, please verify moisture content and processing temperatures. Usage of regrind is possible depending on the molded part characteristics. For further details, please refer to the document 'Instructions for injection molding' or contact our technical support team.




ECOMID® ARX H GF50 BK 9005

Stress-strain (dry)

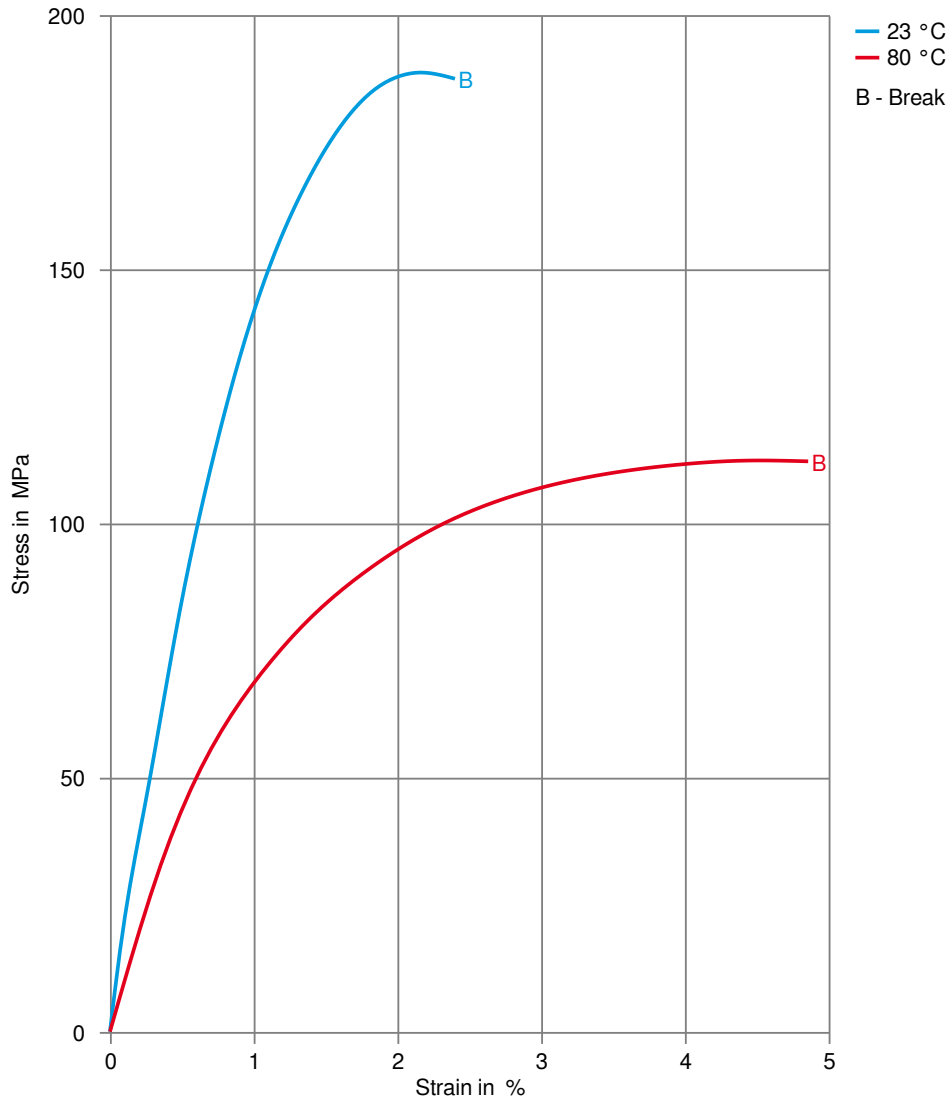


ECOMID® ARX H GF50 BK 9005

Stress-strain (cond.)

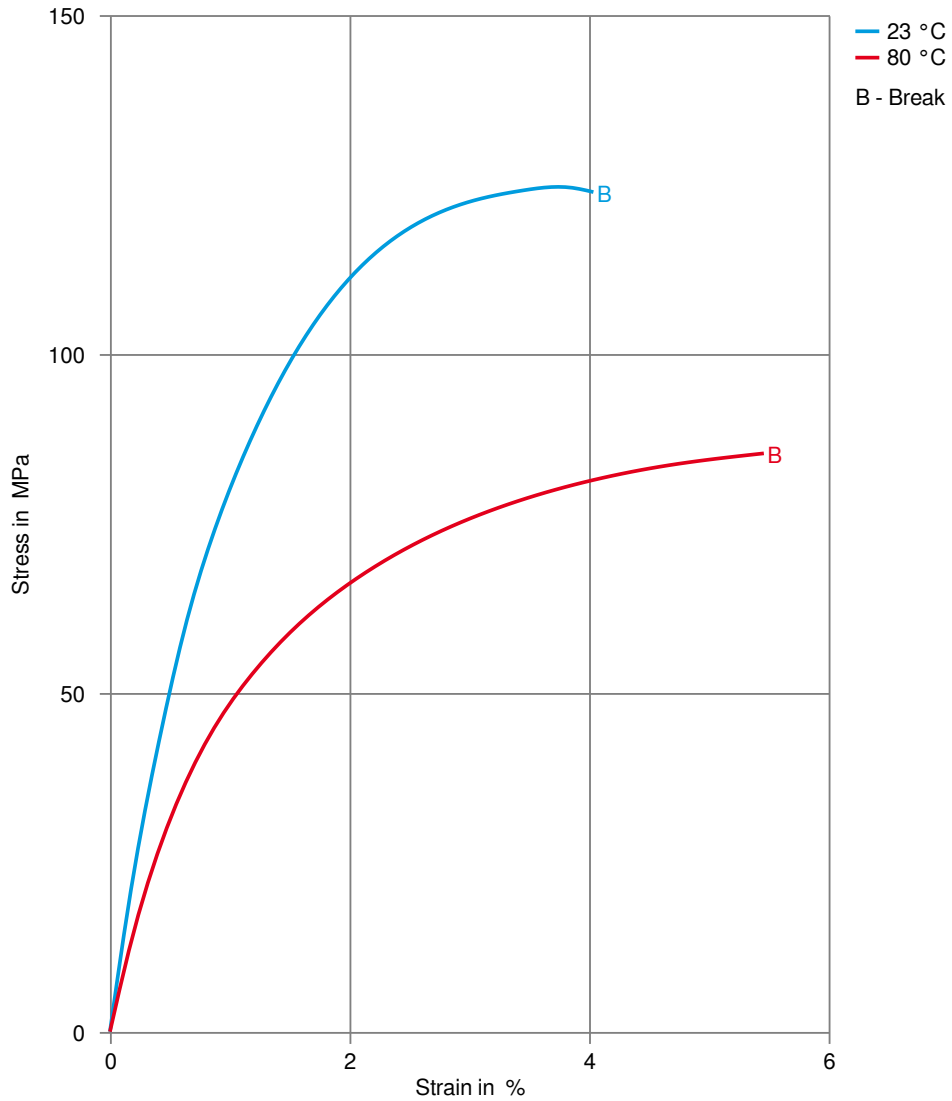


ECOMID® ARX H GF50 BK 9005

Secant modulus-strain (dry)

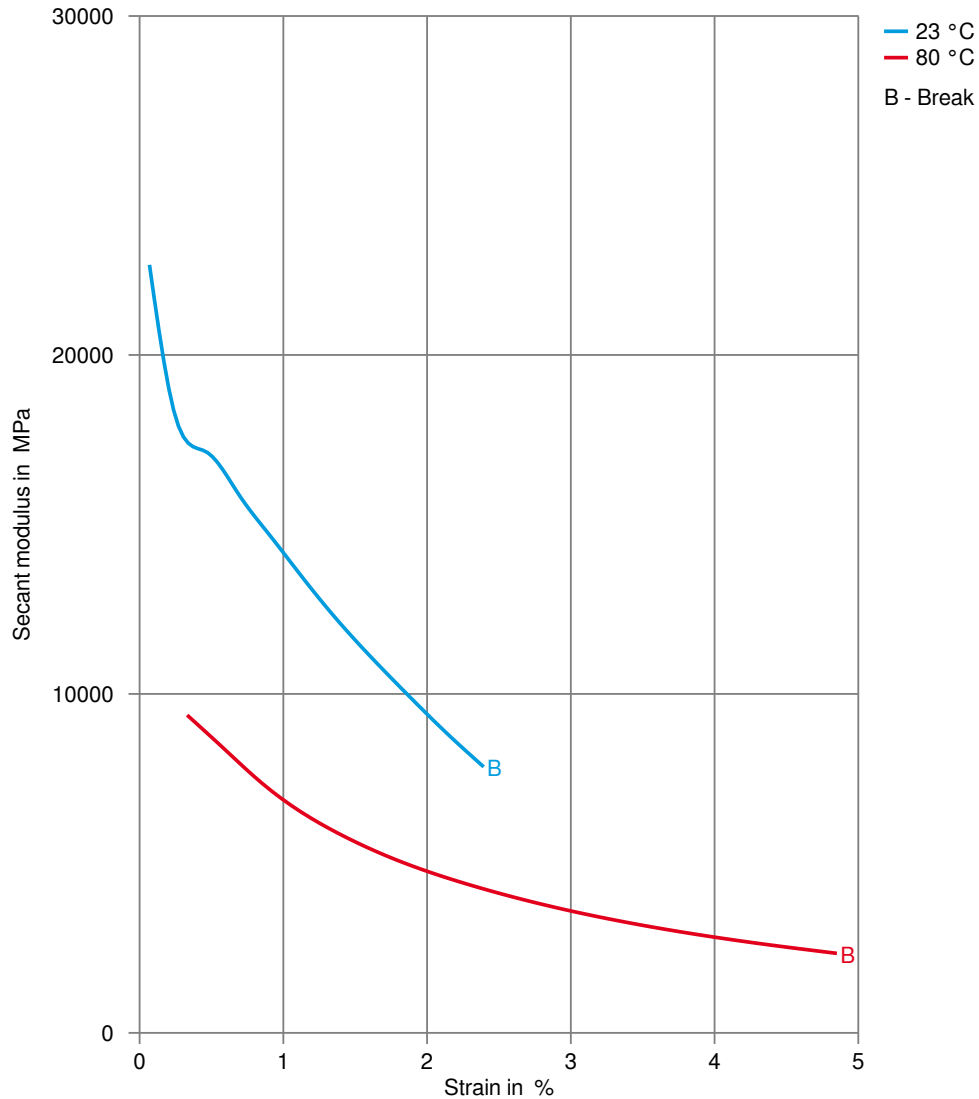

ECOMID® ARX H GF50 BK 9005

Secant modulus-strain (cond.)

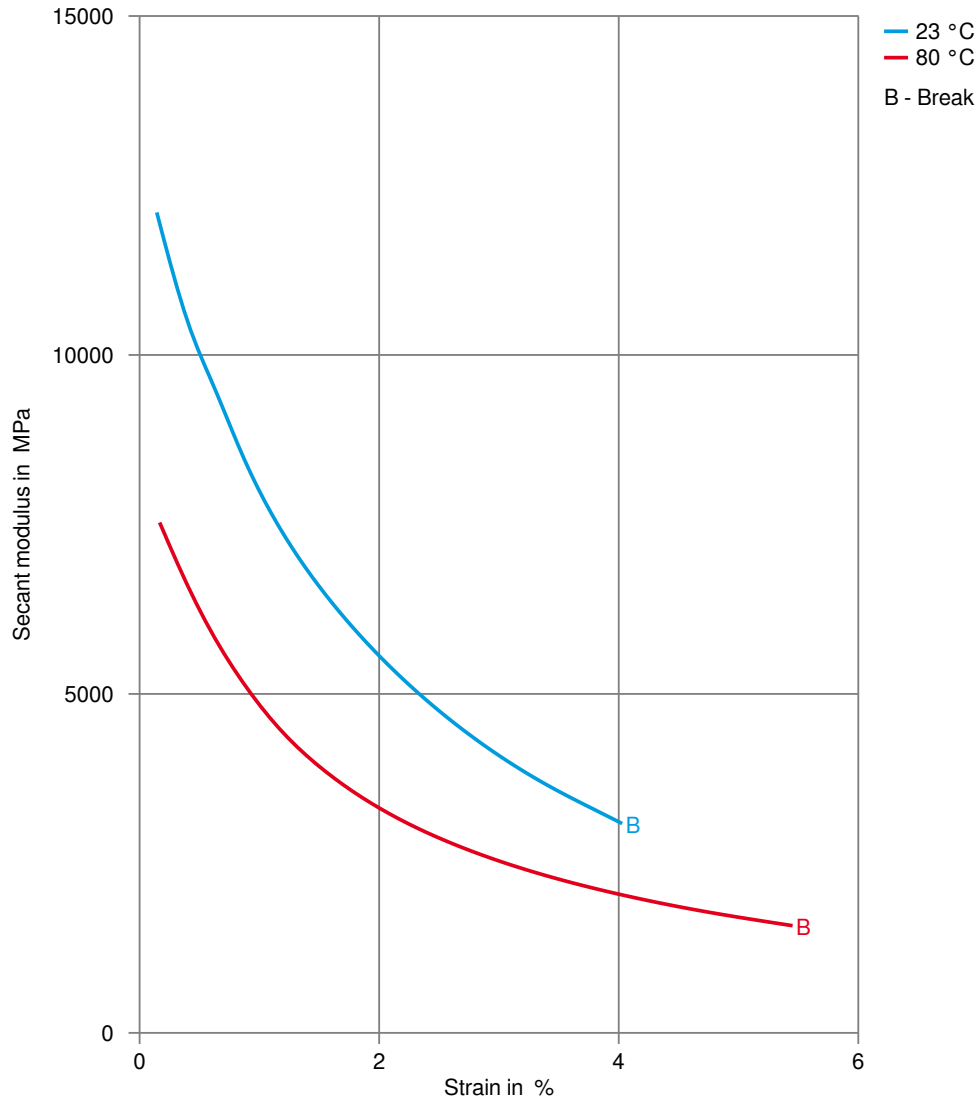

ECOMID® ARX H GF50 BK 9005

Processing Texts

Injection molding

The following conditions apply to a standard injection molding process. Machine temperatures: barrel 265-290°C (PA66), 235-270°C (PA6), nozzle and hot runners up to 300°C (up to 290°C products with flame retardants). Mold temperatures: 60-80°C, (80-100°C highly reinforced grades). Back pressure: typically, 5-10 bar (hydraulic pressure). Temperatures exceeding 300°C and long residence time could lead to additives degradation and brittleness of the material. In case of gas generation in the melt, please verify moisture content and processing temperatures. Usage of regrind is possible depending on the molded part characteristics. For further details, please refer to the document 'Instructions for injection molding' or contact our technical support team.

Injection molding Preprocessing

PA materials, stocked in a moisture-proof packaging, can be processed without drying; however, it is always recommended drying the product that comes from a large package (e.g. Octabin). The moisture content suggested for the injection molding process should be lower than 0.15%, according to the grade and to the molded part characteristics. The materials containing flame retardants should have moisture content below 0.10%. Red phosphorous containing grades must always be dried below 0.08%. The drying time depends on the moisture content and the drying conditions. Typically, 4-8 hours at 80-90°C using dehumidified air (dew point of -20°C) are suitable conditions for a starting moisture content of 0.20%-0.40%.

Injection molding Postprocessing

PA materials reach their final performance with a water content of about 1.5 to 3.5% by weight, depending on the type. This percentage corresponds to the point of equilibrium between the rates of absorption and desorption of moisture. After molding, in favorable environmental conditions, a part can quickly absorb moisture up to 0.5-1.0%, while the equilibrium will be reached during its life. A conditioning treatment can accelerate further the initial water absorption of the molded parts. Conditioning is usually carried out in hot and humid environment (for example 50°C, 100% RH), inside climatic chambers. Slight dimensional variations (increase in volume due to the water absorbed) must be considered, especially in unfilled grades. Post-treatments of parts may also include the annealing (60-80°C in oven, up to four hours). This procedure can be useful to relax any internal stresses.

Other Approvals

Other Approvals

| OEM | Specification | Additional Information |
|-----------|---------------|---|
| VW Group* | VW50133 | * best fitting grade to PA66-8-A, not officially approved |



ECOMID® ARX H GF50 BK 9005

| | | |
|-----------|---------|--|
| VW Group* | VW50127 | * best fitting grade to PA66-10, not officially approved |
|-----------|---------|--|

