

Zytel® 70G30REF NC010 (PRELIMINARY)

NYLON RESIN

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, we recommend, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry..

Zytel® 70G30REF NC010 is a 30% glass reinforced polyamide 66, hydrolysis resistant, developed for electrical and electronics applications.

Product information

Resin Identification	PA66-GF30	ISO 1043
Part Marking Code	>PA66-GF30<	ISO 11469

Rheological properties

	dry/cond.		
Moulding shrinkage, parallel	0.3 / -	%	ISO 294-4, 2577
Moulding shrinkage, normal	1.0 / -	%	ISO 294-4, 2577

Typical mechanical properties

	dry/cond.		
Tensile Modulus	10000 / 7000	MPa	ISO 527-1/-2
Stress at break, 5mm/min	190 / 130	MPa	ISO 527-1/-2
Strain at break, 5mm/min	3 / 5	%	ISO 527-1/-2
Flexural Modulus	9000 / 6000	MPa	ISO 178
Flexural Strength	280 / -	MPa	ISO 178
Charpy impact strength, 23°C	55 / 80 ^[DS]	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	10 / 11 ^[DS]	kJ/m ²	ISO 179/1eA
Poisson's ratio	0.34 / 0.35		

[DS]: Derived from similar grade

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	265 / *	°C	ISO 11357-1/-3

Flammability

	dry/cond.		
Burning Behav. at 1.5mm nom. thickn.	HB / * ^[DS]	class	UL 94
Thickness tested	1.5 / *	mm	UL 94
Burning Behav. at thickness h	HB / * ^[DS]	class	UL 94
Thickness tested	0.4 / * ^[DS]	mm	UL 94

[DS]: Derived from similar grade



Zytel® 70G30REF NC010 (PRELIMINARY)

NYLON RESIN

Electrical properties

Volume resistivity	dry/cond.	
Electric strength	>1E13 / 1E11 ^[DS] Ohm.m	IEC 62631-3-1
Comparative tracking index	37 / 36 ^[DS] kV/mm	IEC 60243-1
	600 / -	IEC 60112

[DS]: Derived from similar grade

Other properties

Humidity absorption, 2mm	dry/cond.	
Density	1.9 / * %	Sim. to ISO 62
	1370 / - kg/m ³	ISO 1183

Injection

Drying Recommended	yes	
Drying Temperature	80 °C	
Drying Time, Dehumidified Dryer	2 - 4 h	
Processing Moisture Content	≤0.2 %	
Melt Temperature Optimum	295 °C	Internal
Min. melt temperature	285 °C	
Max. melt temperature	305 °C	
Screw tangential speed	≤0.2 m/s	
Mold Temperature Optimum	100 °C	
Min. mould temperature	70 °C	
Max. mould temperature	120 °C	
Hold pressure range	50 - 100 MPa	
Hold pressure time	3 s/mm	
Ejection temperature	210 °C	Internal

Characteristics


Additives	Release agent, Low halide content
-----------	-----------------------------------



Zytel® 70G30REF NC010 (PRELIMINARY)

NYLON RESIN


Stress-strain (dry)

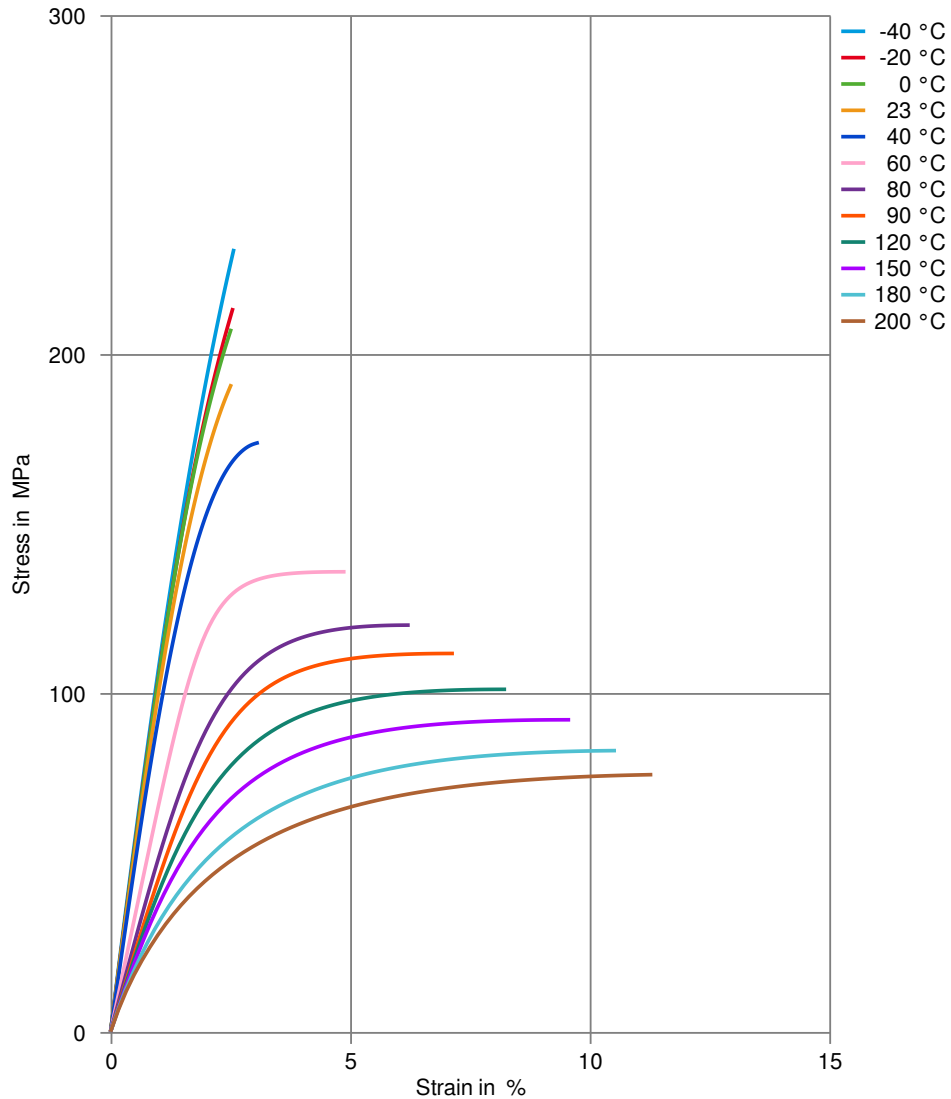

Zytel® 70G30REF NC010 (PRELIMINARY)

NYLON RESIN


Stress-strain (cond.)

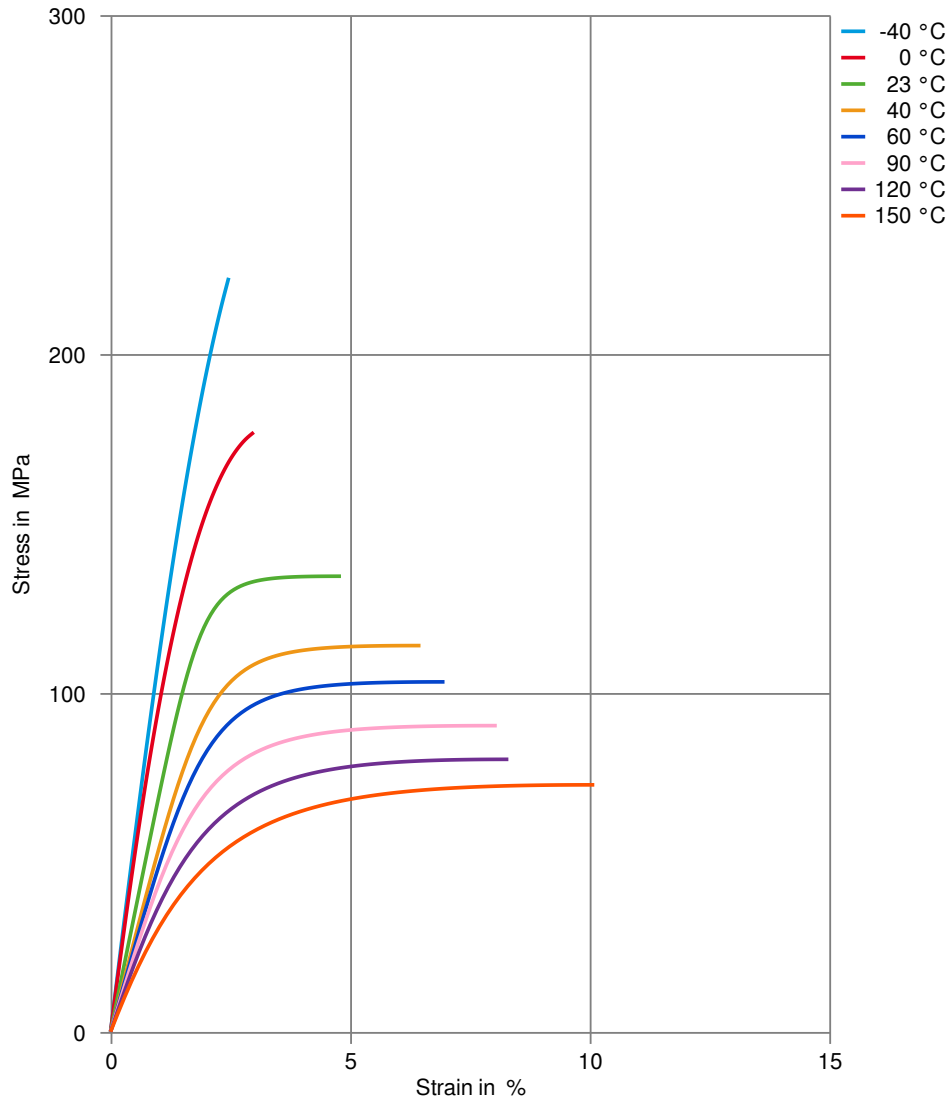

Zytel® 70G30REF NC010 (PRELIMINARY)

NYLON RESIN


Secant modulus-strain (dry)

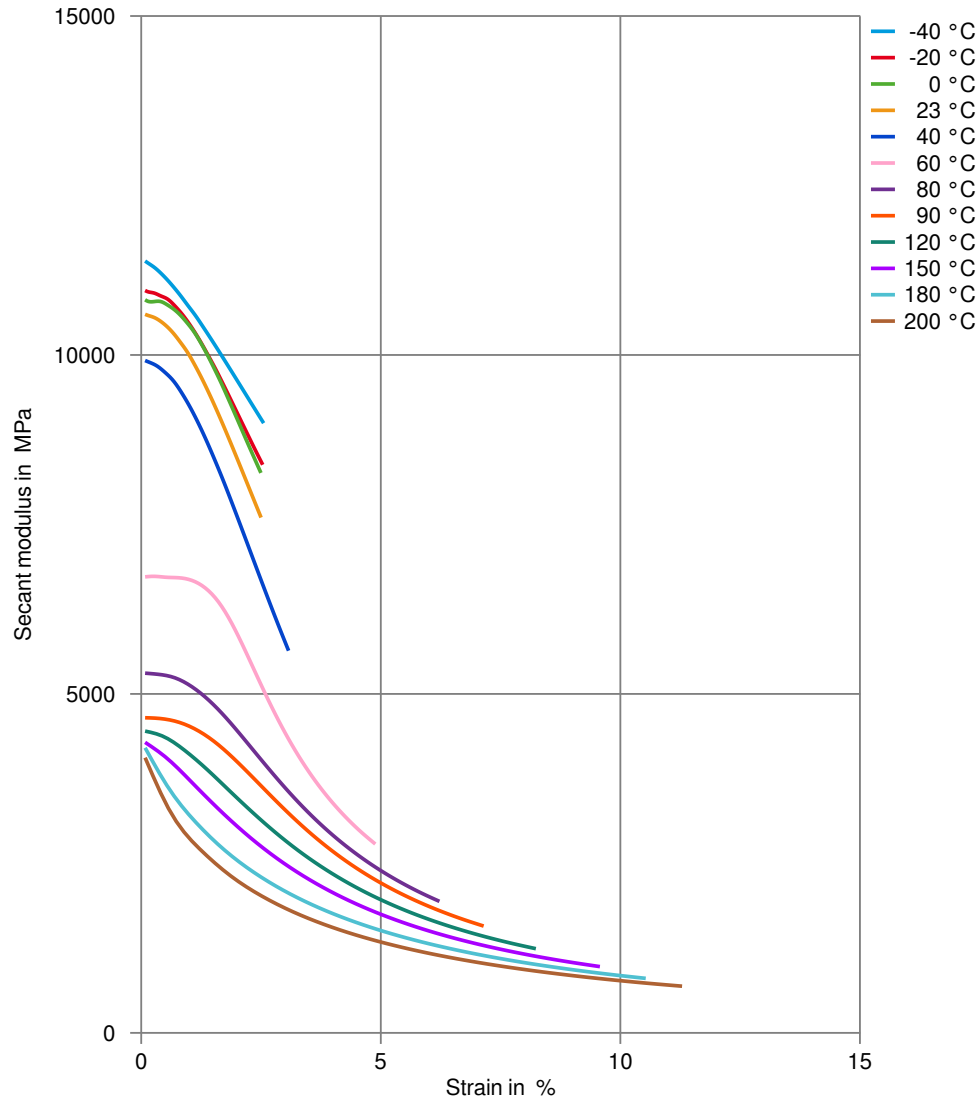

Zytel® 70G30REF NC010 (PRELIMINARY)

NYLON RESIN


Secant modulus-strain (cond.)

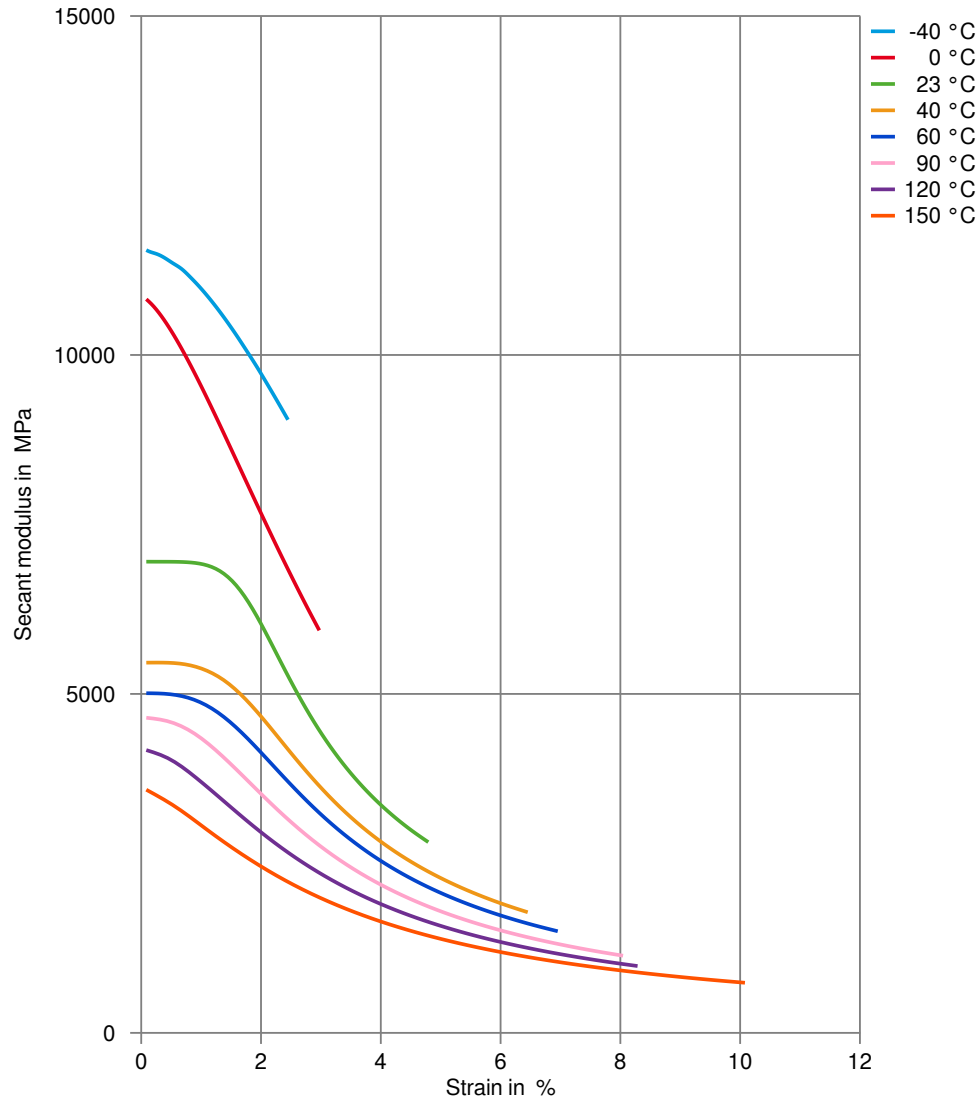

Zytel® 70G30REF NC010 (PRELIMINARY)

NYLON RESIN


Specific volume-temperature (pvT)

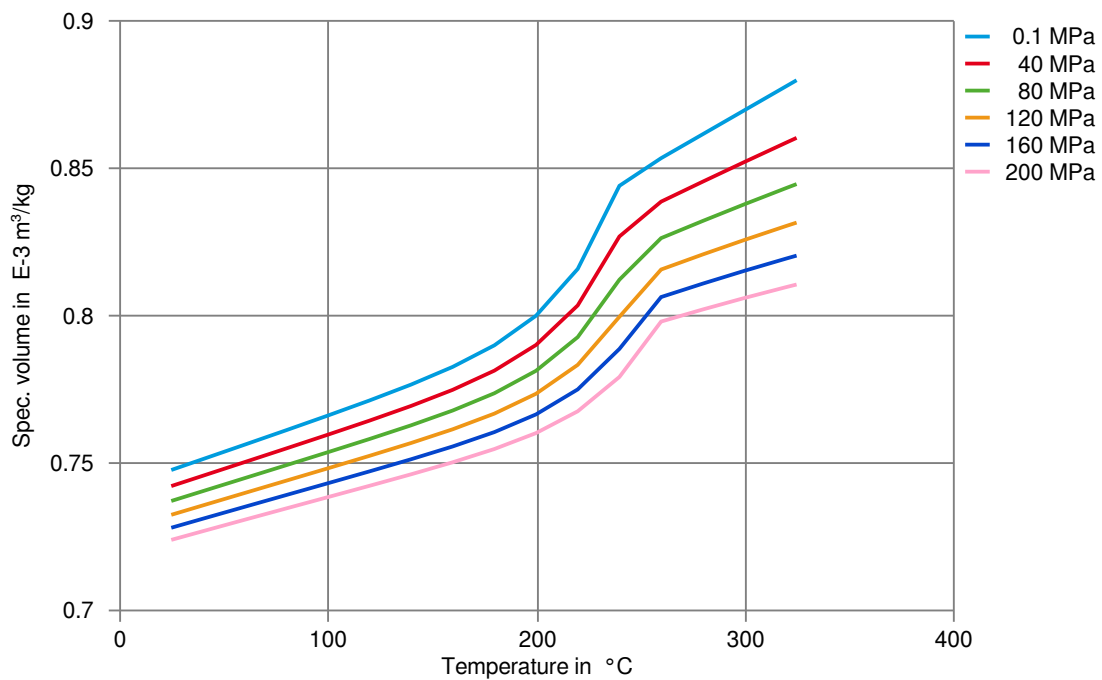

Zytel® 70G30REF NC010 (PRELIMINARY)

NYLON RESIN


Tensile modulus-temperature (dry)

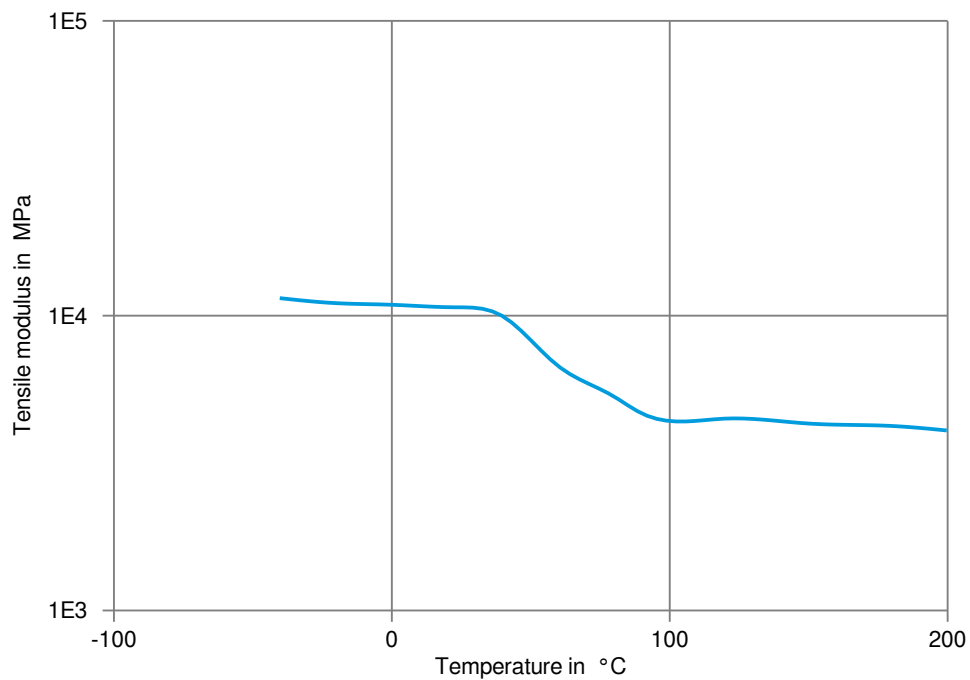

Zytel® 70G30REF NC010 (PRELIMINARY)

NYLON RESIN

Tensile modulus-temperature (cond.)

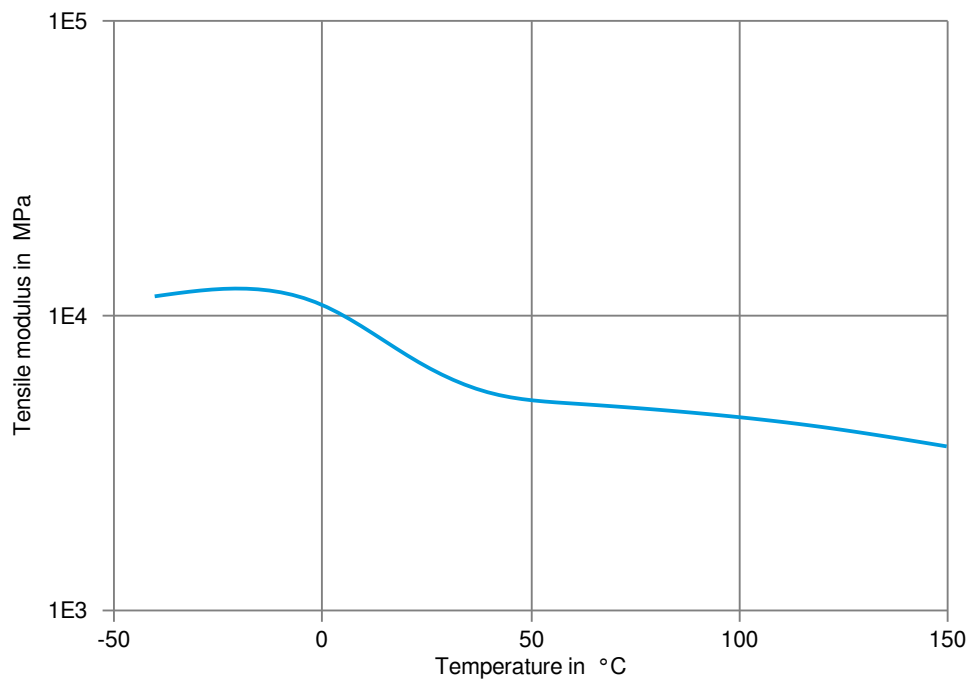

Zytel® 70G30REF NC010 (PRELIMINARY)

NYLON RESIN

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass), 23°C
- ✓ Citric Acid solution (10% by mass), 23°C
- ✓ Lactic Acid (10% by mass), 23°C
- ✗ Hydrochloric Acid (36% by mass), 23°C
- ✗ Nitric Acid (40% by mass), 23°C
- ✗ Sulfuric Acid (38% by mass), 23°C
- ✗ Sulfuric Acid (5% by mass), 23°C
- ✗ Chromic Acid solution (40% by mass), 23°C

Bases

- ✗ Sodium Hydroxide solution (35% by mass), 23°C
- ✓ Sodium Hydroxide solution (1% by mass), 23°C
- ✓ Ammonium Hydroxide solution (10% by mass), 23°C

Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✓ Ethanol, 23°C

Hydrocarbons

- ✓ n-Hexane, 23°C
- ✓ Toluene, 23°C
- ✓ iso-Octane, 23°C

Ketones

- ✓ Acetone, 23°C

Ethers

- ✓ Diethyl ether, 23°C

Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23°C
- ✓ SAE 10W40 multigrade motor oil, 130°C
- ✓ SAE 80/90 hypoid-gear oil, 130°C
- ✓ Insulating Oil, 23°C
- ✓ Hydraulic oil Pentosin CHF 202, 125°C

Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5, 60°C
- ✓ ISO 1817 Liquid 2 - M15E4, 60°C
- ✓ ISO 1817 Liquid 3 - M3E7, 60°C
- ✓ ISO 1817 Liquid 4 - M15, 60°C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✗ Diesel fuel (pref. ISO 1817 Liquid F), 90°C



Zytel® 70G30REF NC010 (PRELIMINARY)

NYLON RESIN

- ✗ Diesel fuel (pref. ISO 1817 Liquid F), >90°C
- ✗ Diesel EN 590, 100°C

Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C
- ✓ Sodium Carbonate solution (20% by mass), 23°C
- ✓ Sodium Carbonate solution (2% by mass), 23°C
- ✗ Zinc Chloride solution (50% by mass), 23°C

Other

- ✓ Ethyl Acetate, 23°C
- ✗ Hydrogen peroxide, 23°C
- ✓ DOT No. 4 Brake fluid, 130°C
- ✓ DOT No. 4 Brake fluid, 120°C
- ✓ Ethylene Glycol (50% by mass) in water, 108°C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23°C
- ✓ 50% Oleic acid + 50% Olive Oil, 23°C
- ✓ Water, 23°C
- ✓ Water, 90°C
- ✗ Phenol solution (5% by mass), 23°C
- ✓ Coolant Glysantin G48, 1:1 in water, 125°C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

