

Zytel® MT409AHS NC010

NYLON RESIN

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, we recommend, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry.

Zytel® MT409AHS NC010 is a Medium Toughened, high performance, heat stabilised polyamide 66 resin having good stiffness, improved knit line strength, surface appearance with outstanding processability.

Product information

Resin Identification	PA66-I	ISO 1043
Part Marking Code	>PA66-I<	ISO 11469
ISO designation	ISO 16396-PA66-I,,M1G1HNR,S14-020	

Rheological properties

	dry/cond.		
Moulding shrinkage, parallel	1.5 / -	%	ISO 294-4, 2577
Moulding shrinkage, normal	1.7 / -	%	ISO 294-4, 2577

Typical mechanical properties

	dry/cond.		
Tensile Modulus	2400 / 1100	MPa	ISO 527-1/-2
Yield stress, 50mm/min	61 / 43	MPa	ISO 527-1/-2
Yield strain, 50mm/min	5 / 28	%	ISO 527-1/-2
Stress at break, 50mm/min	50 / -	MPa	ISO 527-1/-2
Nominal strain at break	25 / >50	%	ISO 527-1/-2
Strain at break, 50mm/min	45 / -	%	ISO 527-1/-2
Flexural Modulus	2200 / 1000	MPa	ISO 178
Flexural Strength	75 / 53 ^[C]	MPa	ISO 178
Tensile creep modulus, 1000h	* / 820	MPa	ISO 899-1
Charpy impact strength, 23°C	N / N	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	N / N	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	21 / 40	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	13 / 13	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -40°C	13 / -	kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	18 / 29	kJ/m ²	ISO 180/1A
Izod notched impact strength, -30°C	15 / 15	kJ/m ²	ISO 180/1A
Izod notched impact strength, -40°C	13 / 11	kJ/m ²	ISO 180/1A



Zytel® MT409AHS NC010

NYLON RESIN

Hardness, Rockwell, M-scale	65 / 55 ^[DS]	ISO 2039-2
Hardness, Rockwell, R-scale	115 / 105 ^[DS]	ISO 2039-2
Ball indentation hardness, H 358/30	125 / 60 ^[OT, 1] MPa	ISO 2039-1
Poisson's ratio	0.38 / 0.45	

[C]: Calculated

[DS]: Derived from similar grade

[OT]: One time tested

[1]: 132/30

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	262 / *	°C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	80 / 20	°C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	66 / *	°C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	200 / *	°C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel	100 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	120 / *	E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.14	W/(m K)	Internal
Spec. heat capacity of melt	2730	J/(kg K)	Internal
RTI, electrical, 0.75mm	130	°C	UL 746B
RTI, electrical, 1.5mm	130	°C	UL 746B
RTI, electrical, 3mm	130	°C	UL 746B
RTI, impact, 0.75mm	65	°C	UL 746B
RTI, impact, 1.5mm	105	°C	UL 746B
RTI, impact, 3mm	105	°C	UL 746B
RTI, strength, 0.75mm	95	°C	UL 746B
RTI, strength, 1.5mm	105 / *	°C	UL 746B
RTI, strength, 3mm	110	°C	UL 746B

Flammability

	dry/cond.		
Burning Behav. at 1.5mm nom. thickn.	HB / *	class	UL 94
Thickness tested	1.5 / *	mm	UL 94
UL recognition	yes / *		UL 94
Burning Behav. at thickness h	HB / *	class	UL 94
Thickness tested	0.8 / *	mm	UL 94
UL recognition	yes / *		UL 94
Thickness tested	3 / *	mm	UL 94
UL recognition	yes / *		UL 94
Oxygen index	20 / *	%	ISO 4589-1/-2
Glow Wire Flammability Index, 1mm	750 / - ^[DS]	°C	IEC 60695-2-12
FMVSS Class	B		ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	29	mm/min	ISO 3795 (FMVSS 302)

[DS]: Derived from similar grade



Zytel® MT409AHS NC010

NYLON RESIN

Electrical properties

	dry/cond.		
Relative permittivity, 100Hz	3.6 / 6.6		IEC 62631-2-1
Relative permittivity, 1MHz	3.4 / 3.7		IEC 62631-2-1
Dissipation factor, 100Hz	50 / 1800	E-4	IEC 62631-2-1
Dissipation factor, 1MHz	120 / 440	E-4	IEC 62631-2-1
Volume resistivity	>1E13 / 3E10	Ohm.m	IEC 62631-3-1
Surface resistivity	* / 1E13	Ohm	IEC 62631-3-2
Electric strength	23 / 22	kV/mm	IEC 60243-1
Comparative tracking index	600 / -		IEC 60112
Electric Strength, Short Time, 2mm	23 / 22	kV/mm	IEC 60243-1

Other properties

	dry/cond.		
Humidity absorption, 2mm	2.1 / *	%	Sim. to ISO 62
Water absorption, 2mm	7.2 / *[C]	%	Sim. to ISO 62
Water absorption, Immersion 24h	1.3 / *	%	Sim. to ISO 62
Density	1110 / -	kg/m³	ISO 1183
Density of melt	930	kg/m³	Internal
[C]: Calculated			

Film Properties

	dry/cond.		
Strain at yield, parallel	4.4 / *	%	ISO 527-3

VDA Properties

	dry/cond.		
Emission of organic compounds	10	µgC/g	VDA 277
Odour	4	class	VDA 270
Fogging, G-value (condensate)	0.1 / *	mg	ISO 6452

Injection

Drying Recommended	yes		
Drying Temperature	80	°C	
Drying Time, Dehumidified Dryer	2 - 4	h	
Processing Moisture Content	≤0.2	%	
Melt Temperature Optimum	290	°C	Internal
Min. melt temperature	280	°C	
Max. melt temperature	300	°C	
Screw tangential speed	≤0.3	m/s	
Mold Temperature Optimum	80	°C	
Min. mould temperature	50	°C	
Max. mould temperature	100	°C	
Hold pressure range	50 - 100	MPa	
Hold pressure time	4	s/mm	
Ejection temperature	190	°C	Internal



Zytel® MT409AHS NC010


NYLON RESIN

Characteristics

Additives

Release agent


Viscosity-shear rate

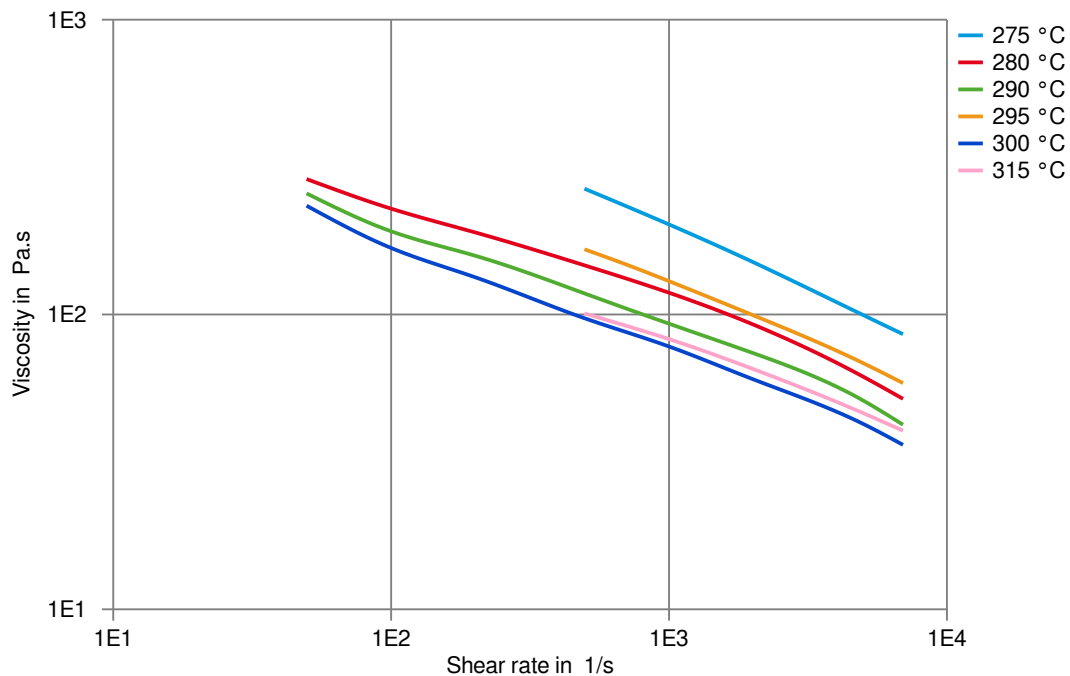

Zytel® MT409AHS NC010

NYLON RESIN


Shearstress-shear rate

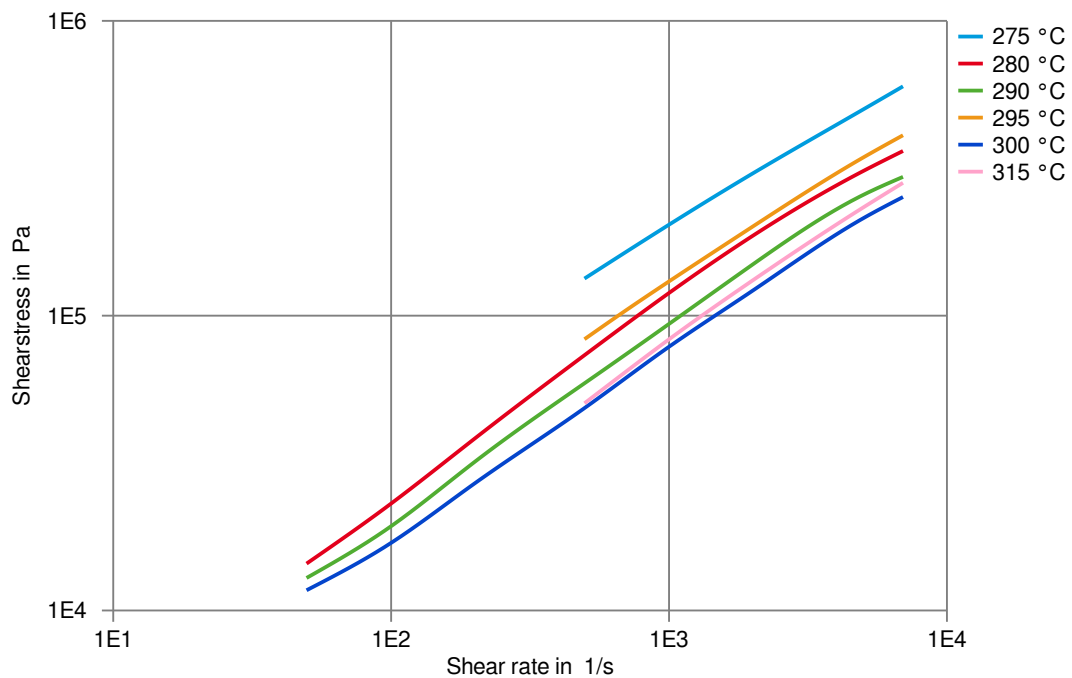

Zytel® MT409AHS NC010

NYLON RESIN


Dynamic Tensile modulus-temperature (dry)

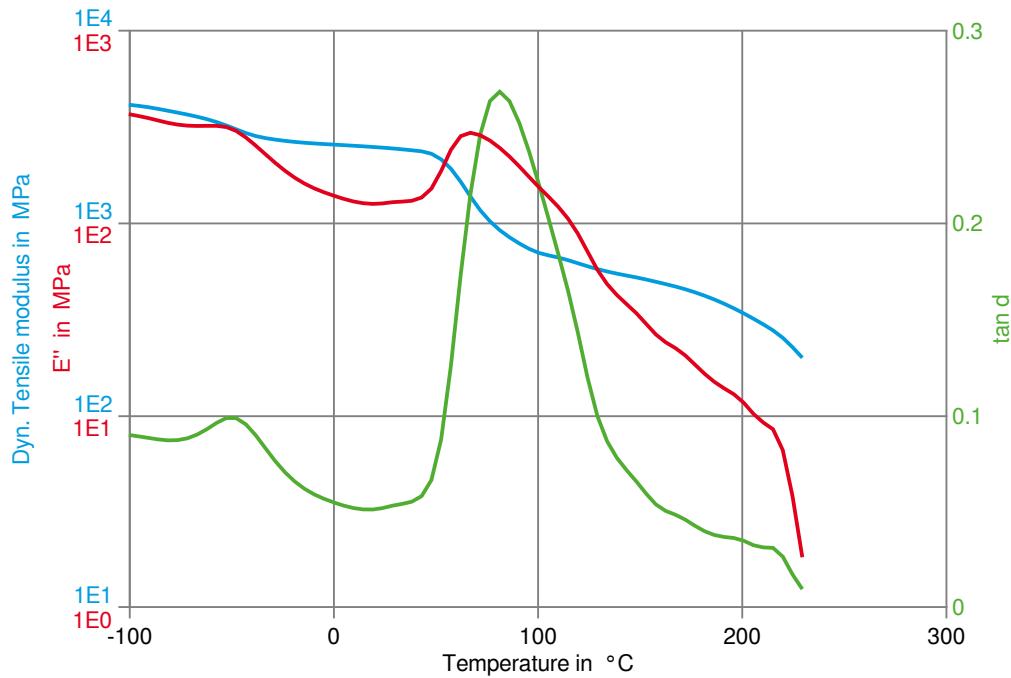

Zytel® MT409AHS NC010

NYLON RESIN


Stress-strain (dry)

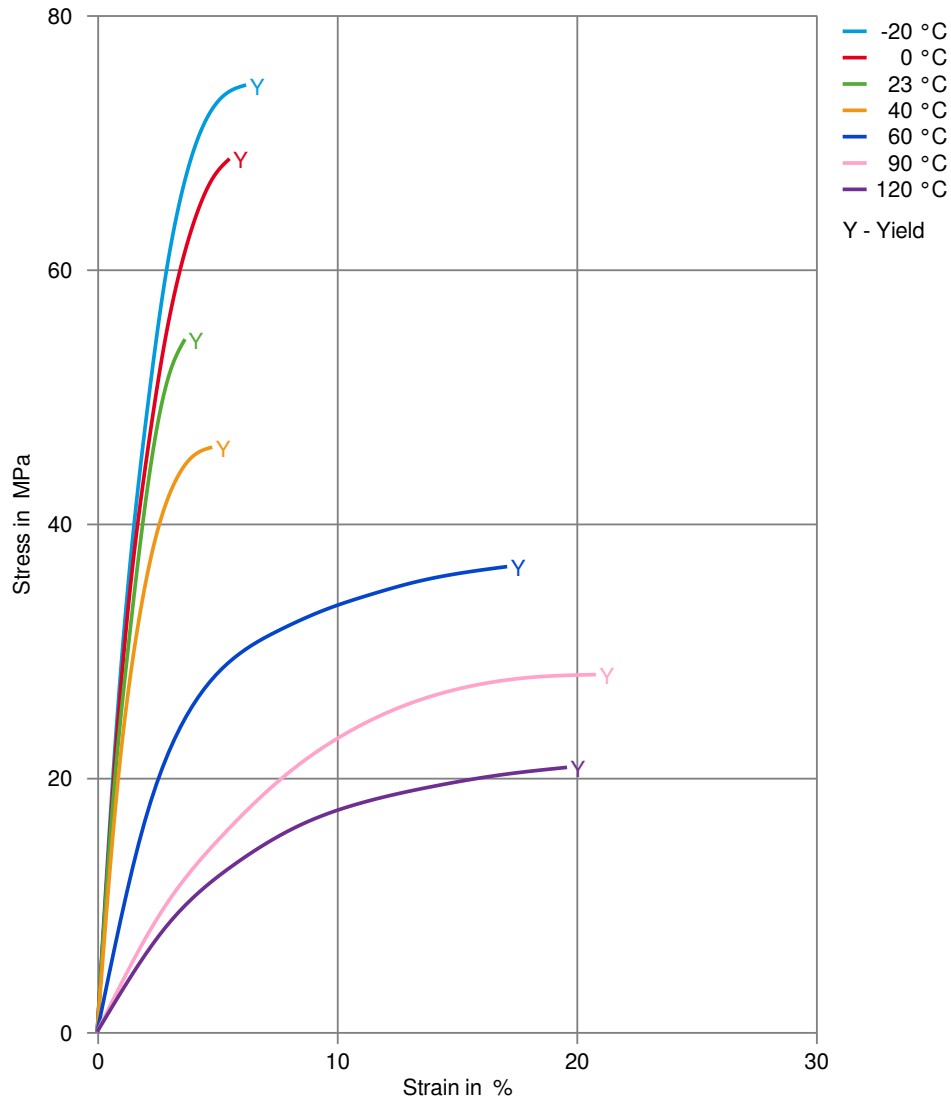

Zytel® MT409AHS NC010

NYLON RESIN


Stress-strain (cond.)

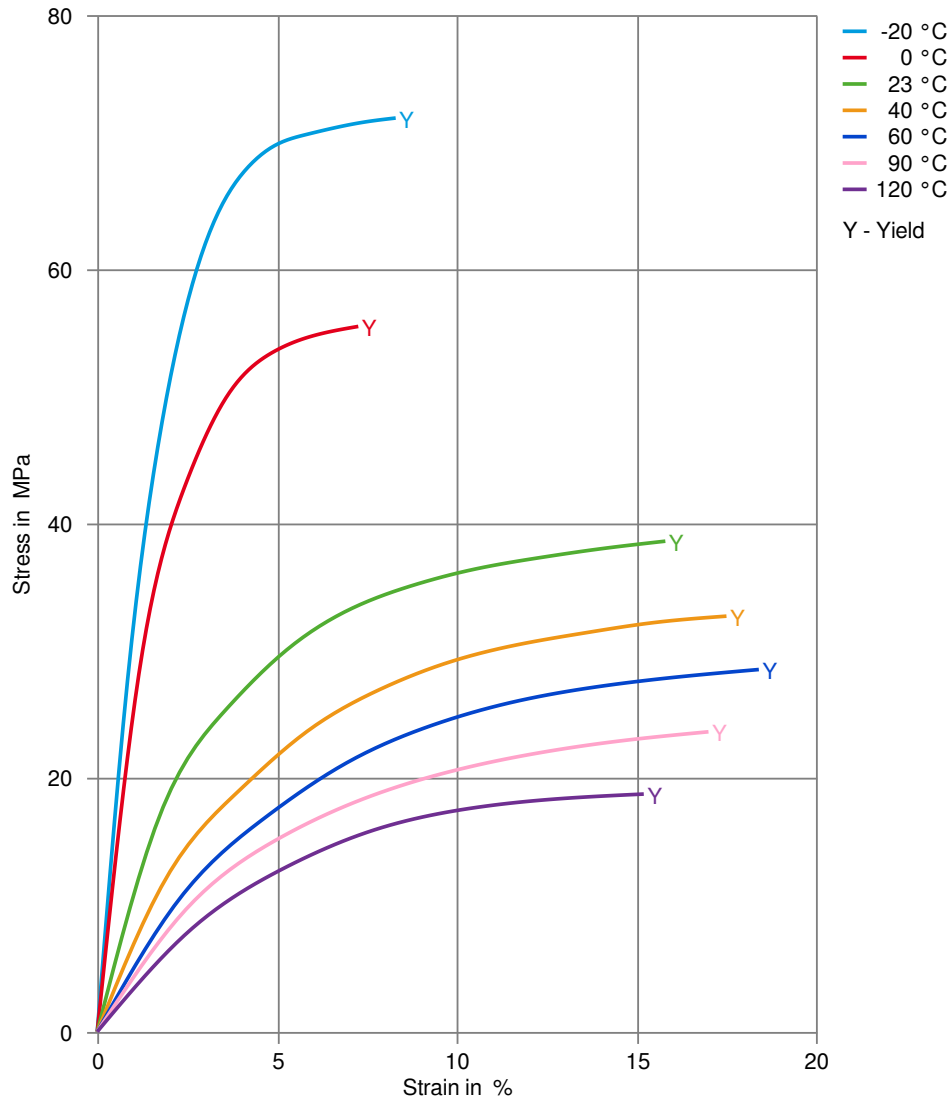

Zytel® MT409AHS NC010

NYLON RESIN


Secant modulus-strain (dry)

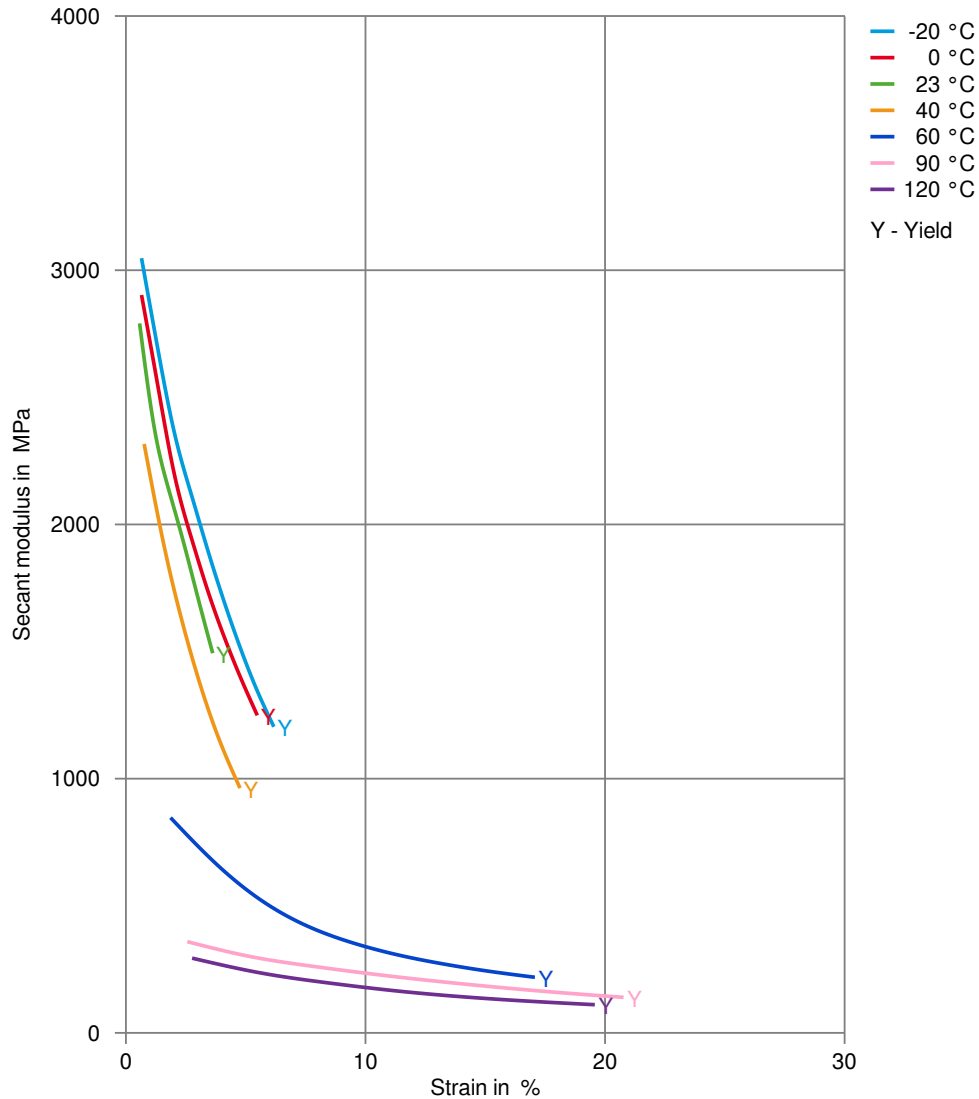

Zytel® MT409AHS NC010

NYLON RESIN


Secant modulus-strain (cond.)

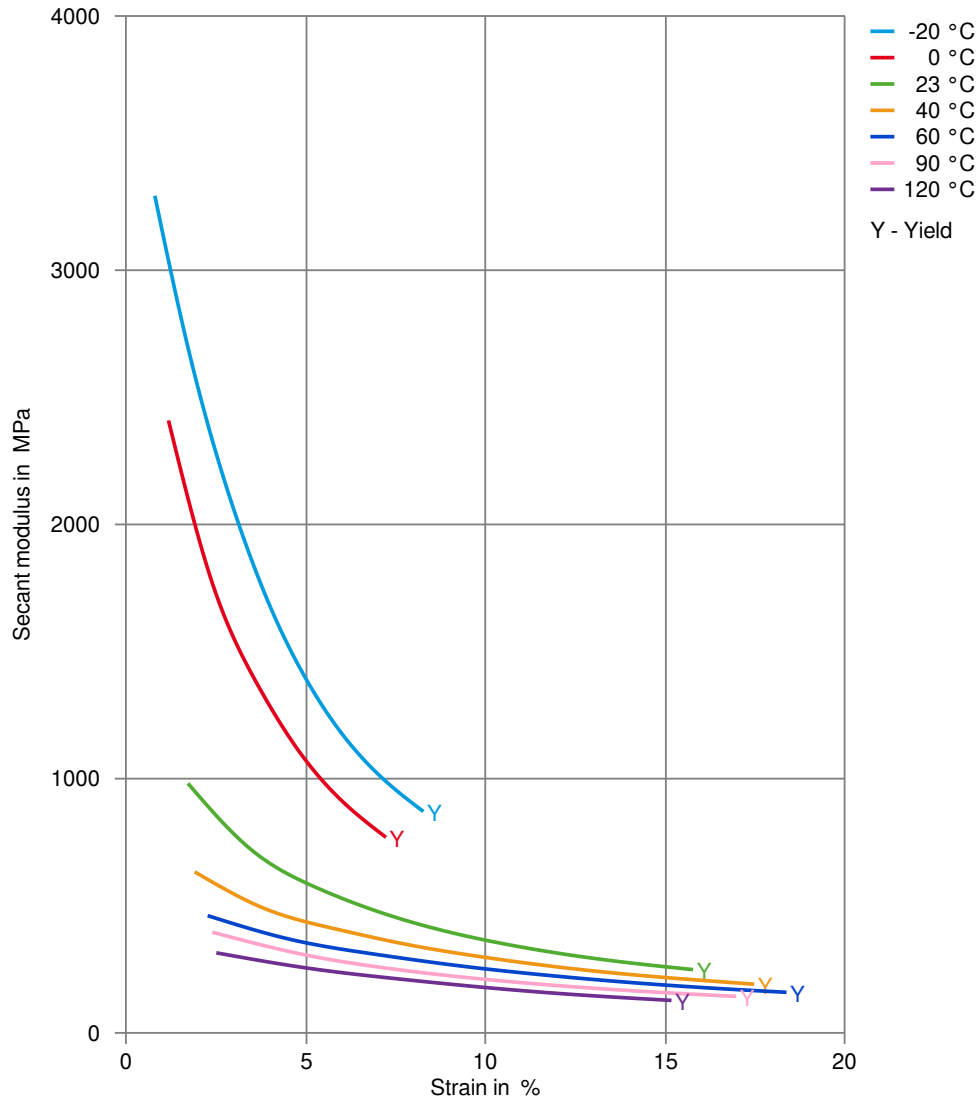

Zytel® MT409AHS NC010

NYLON RESIN


Tensile modulus-temperature (dry)

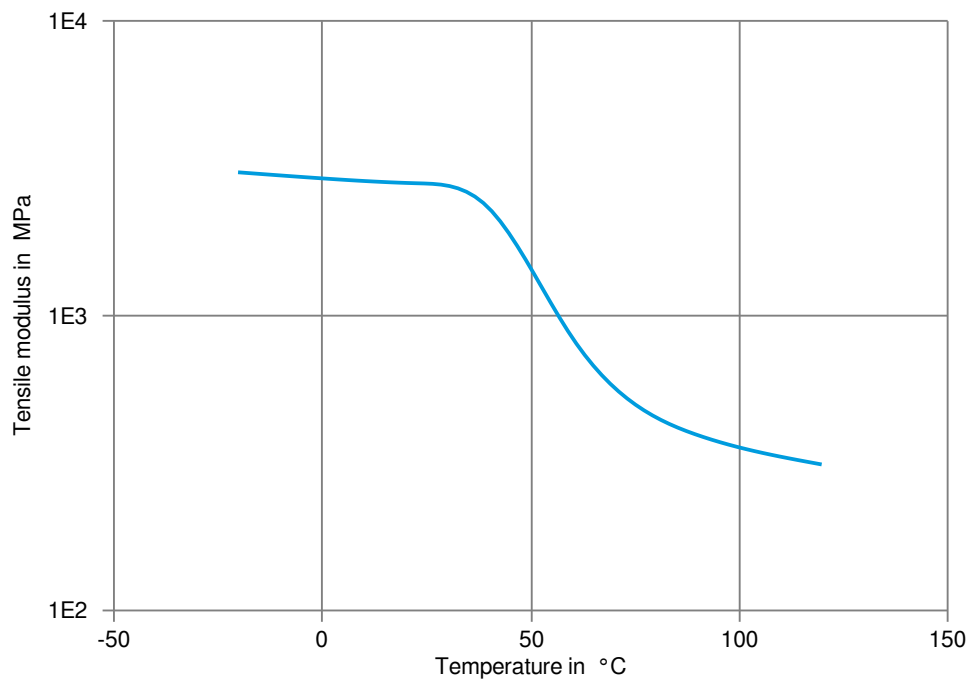

Zytel® MT409AHS NC010

NYLON RESIN

Tensile modulus-temperature (cond.)

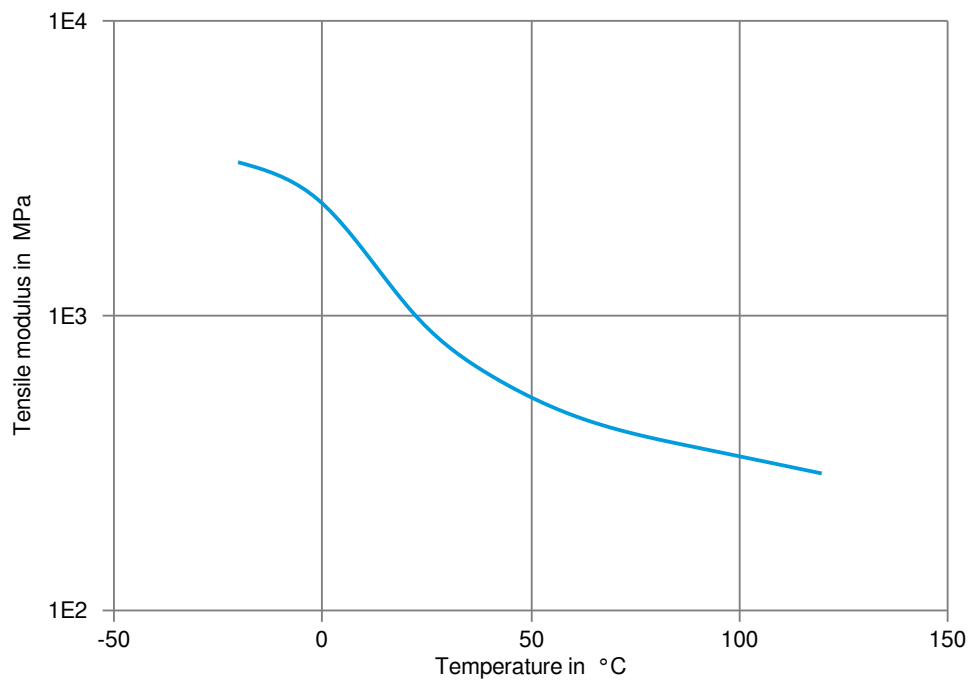

Zytel® MT409AHS NC010

NYLON RESIN

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass), 23 °C
- ✓ Citric Acid solution (10% by mass), 23 °C
- ✓ Lactic Acid (10% by mass), 23 °C
- ✗ Hydrochloric Acid (36% by mass), 23 °C
- ✗ Nitric Acid (40% by mass), 23 °C
- ✗ Sulfuric Acid (38% by mass), 23 °C
- ✗ Sulfuric Acid (5% by mass), 23 °C
- ✗ Chromic Acid solution (40% by mass), 23 °C

Bases

- ✗ Sodium Hydroxide solution (35% by mass), 23 °C
- ✓ Sodium Hydroxide solution (1% by mass), 23 °C
- ✓ Ammonium Hydroxide solution (10% by mass), 23 °C

Alcohols

- ✓ Isopropyl alcohol, 23 °C
- ✓ Methanol, 23 °C
- ✓ Ethanol, 23 °C

Hydrocarbons

- ✓ n-Hexane, 23 °C
- ✓ Toluene, 23 °C
- ✓ iso-Octane, 23 °C

Ketones

- ✓ Acetone, 23 °C

Ethers

- ✓ Diethyl ether, 23 °C

Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23 °C
- ✗ SAE 10W40 multigrade motor oil, 130 °C
- ✗ SAE 80/90 hypoid-gear oil, 130 °C
- ✓ Insulating Oil, 23 °C
- ✗ Motor oil OS206 304 Ref.Eng.Oil, ISP, 135 °C
- ✗ Automatic hypoid-gear oil Shell Donax TX, 135 °C
- ✗ Hydraulic oil Pentosin CHF 202, 125 °C

Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5, 60 °C
- ✓ ISO 1817 Liquid 2 - M15E4, 60 °C
- ✓ ISO 1817 Liquid 3 - M3E7, 60 °C
- ✓ ISO 1817 Liquid 4 - M15, 60 °C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23 °C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23 °C



Zytel® MT409AHS NC010

NYLON RESIN

- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 90°C
- ✗ Diesel fuel (pref. ISO 1817 Liquid F), >90°C

Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C
- ✓ Sodium Carbonate solution (20% by mass), 23°C
- ✓ Sodium Carbonate solution (2% by mass), 23°C
- ✗ Zinc Chloride solution (50% by mass), 23°C

Other

- ✓ Ethyl Acetate, 23°C
- ✗ Hydrogen peroxide, 23°C
- ✗ DOT No. 4 Brake fluid, 130°C
- ✗ Ethylene Glycol (50% by mass) in water, 108°C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23°C
- ✓ 50% Oleic acid + 50% Olive Oil, 23°C
- ✓ Water, 23°C
- ✗ Water, 90°C
- ✗ Phenol solution (5% by mass), 23°C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

