

Crastin® SK605LM BK591

THERMOPLASTIC POLYESTER RESIN

Crastin® SK605LM BK591 is a 30% Glass Reinforced, Laser Markable, Polybutylene Terephthalate

Product information

Resin Identification	PBT-GF30	ISO 1043
Part Marking Code	>PBT-GF30<	ISO 11469

Rheological properties

Melt volume-flow rate	5 cm ³ /10min	ISO 1133
Temperature	250 °C	
Load	2.16 kg	
Moulding shrinkage, parallel	0.3 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.1 %	ISO 294-4, 2577

Typical mechanical properties

Tensile Modulus	9500 MPa	ISO 527-1/-2
Stress at break, 5mm/min	130 MPa	ISO 527-1/-2
Strain at break, 5mm/min	2.5 %	ISO 527-1/-2
Flexural Strength	200 MPa	ISO 178
Charpy impact strength, 23°C	70 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	10 kJ/m ²	ISO 179/1eA
Poisson's ratio	0.34	

Thermal properties

Melting temperature, 10°C/min	225 °C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	55 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	205 °C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	220 ^[DS] °C	ISO 75-1/-2

[DS]: Derived from similar grade

Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	UL 94
Thickness tested	1.5 mm	UL 94
Burning Behav. at thickness h	HB class	UL 94
Thickness tested	0.75 mm	UL 94
Oxygen index	20 %	ISO 4589-1/-2
Glow Wire Flammability Index, 0.75mm	725 °C	IEC 60695-2-12
Glow Wire Flammability Index, 1.5mm	725 °C	IEC 60695-2-12
Glow Wire Flammability Index, 3mm	825 °C	IEC 60695-2-12
Glow Wire Ignition Temperature, 0.75mm	750 °C	IEC 60695-2-13
Glow Wire Ignition Temperature, 1.5mm	750 °C	IEC 60695-2-13
Glow Wire Ignition Temperature, 3mm	800 °C	IEC 60695-2-13



Crastin® SK605LM BK591

THERMOPLASTIC POLYESTER RESIN

FMVSS Class	B	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	54 mm/min	ISO 3795 (FMVSS 302)

Other properties

Density	1520 kg/m ³	ISO 1183
---------	------------------------	----------

VDA Properties

Emission of organic compounds	91.4 µgC/g	VDA 277
Odour	3 class	VDA 270
Fogging, F-value (refraction)	99 %	ISO 6452

Injection

Drying Recommended	yes	
Drying Temperature	120 °C	
Drying Time, Dehumidified Dryer	2 - 4 h	
Processing Moisture Content	≤0.04 %	
Melt Temperature Optimum	250 °C	Internal
Min. melt temperature	240 °C	
Max. melt temperature	260 °C	
Mold Temperature Optimum	80 °C	
Min. mould temperature	30 °C	
Max. mould temperature	130 °C	
Hold pressure range	≥60 MPa	
Hold pressure time	3 s/mm	
Back pressure	As low as possible	
Ejection temperature	170 °C	Internal

Characteristics


Additives	Release agent
-----------	---------------



Crastin® SK605LM BK591

THERMOPLASTIC POLYESTER RESIN


Stress-strain
(measured on Crastin® SK605 NC010)

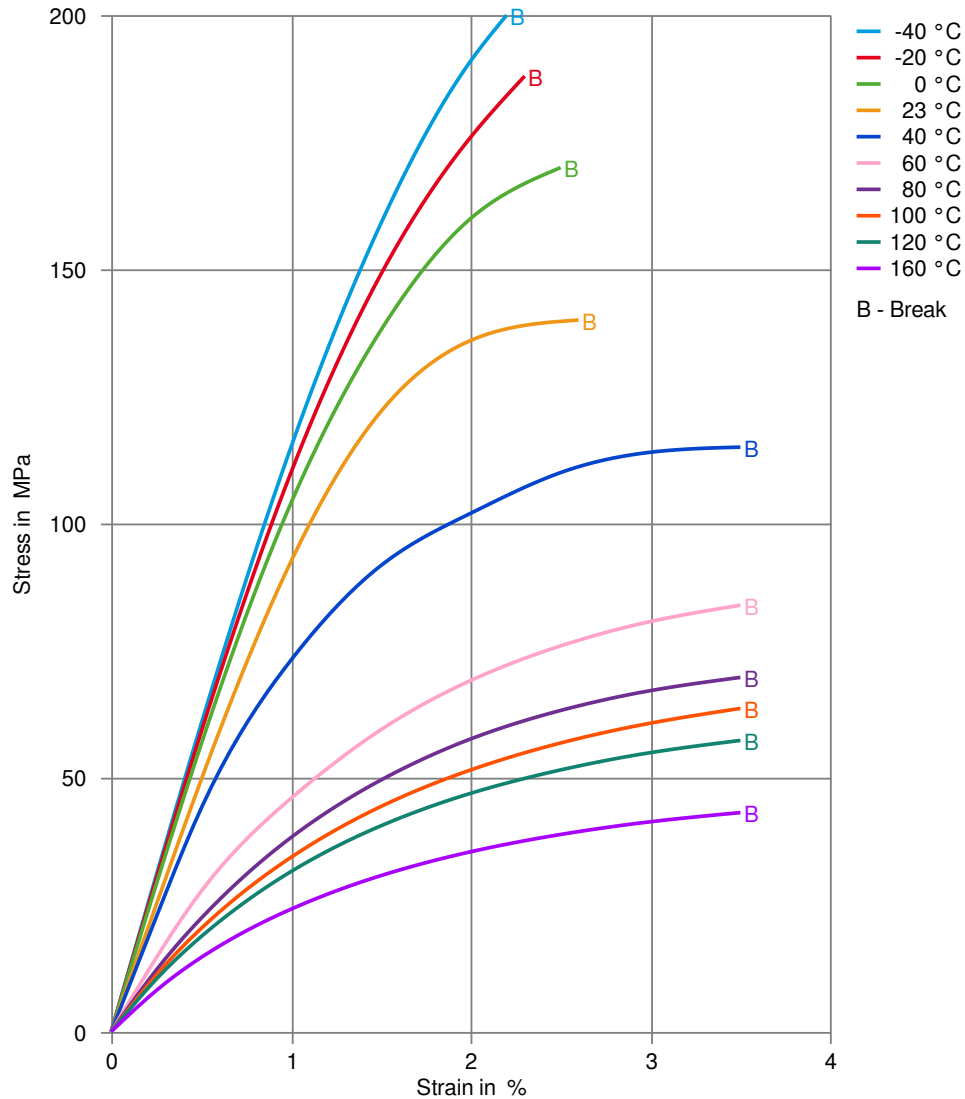

Crastin® SK605LM BK591

THERMOPLASTIC POLYESTER RESIN

Secant modulus-strain
(measured on Crastin® SK605 NC010)

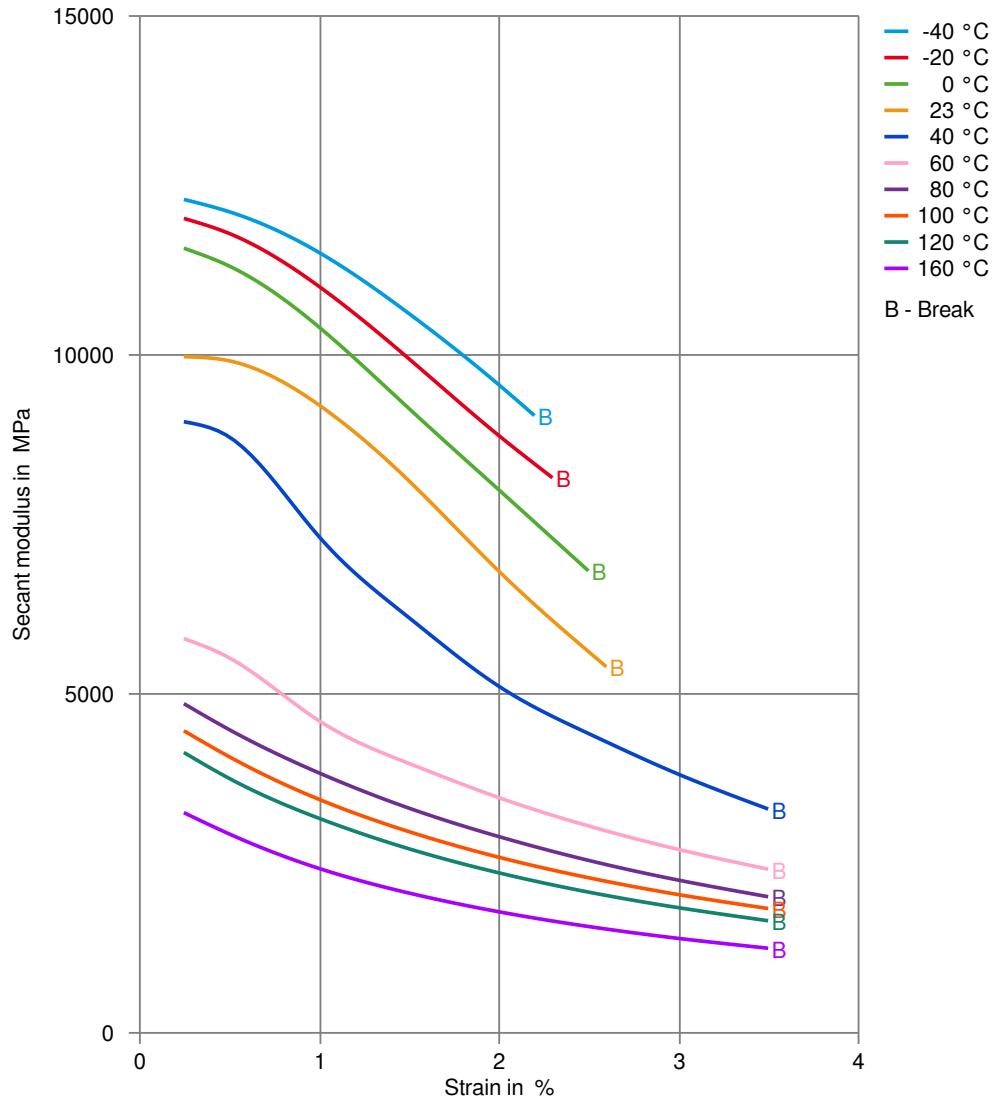

Crastin® SK605LM BK591

THERMOPLASTIC POLYESTER RESIN

Chemical Media Resistance

Other

- ✓ Water, 23°C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

