

Rynite® FR543 NC010

THERMOPLASTIC POLYESTER RESIN

Rynite® FR543 NC010 is a 43% Glass Reinforced, Flame Retardant, Polyethylene Terephthalate

Product information

Resin Identification	PET- GF43FR(17)	ISO 1043
Part Marking Code	>PET-GF43FR(17)<	ISO 11469

Rheological properties

Moulding shrinkage, parallel	0.2 %	ISO 294-4, 2577
Moulding shrinkage, normal	0.8 %	ISO 294-4, 2577
Postmoulding shrinkage, normal, 48h at 80°C	0.35 %	ISO 294-4
Postmoulding shrinkage, parallel, 48h at 80°C	0.05 %	ISO 294-4

Typical mechanical properties

Tensile Modulus	17000 MPa	ISO 527-1/-2
Stress at break, 5mm/min	170 MPa	ISO 527-1/-2
Strain at break, 5mm/min	1.8 %	ISO 527-1/-2
Flexural Modulus	14500 MPa	ISO 178
Compressive strength	230 MPa	ISO 604
Shear Strength	60 MPa	ASTM D 732
Tensile creep modulus, 1000h	15000 MPa	ISO 899-1
Charpy impact strength, 23°C	43 kJ/m²	ISO 179/1eU
Charpy impact strength, -30°C	30 kJ/m²	ISO 179/1eU
Charpy notched impact strength, 23°C	10 kJ/m²	ISO 179/1eA
Charpy notched impact strength, -30°C	10 kJ/m²	ISO 179/1eA
Hardness, Rockwell, M-scale	102	ISO 2039-2
Hardness, Rockwell, R-scale	122	ISO 2039-2
Poisson's ratio	0.33	

Tribological properties

Coefficient of static friction, against itself	0.18	ASTM 1894
Coefficient of static friction, against steel	0.16	ASTM 1894

Thermal properties

Melting temperature, 10°C/min	254 °C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	90 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	225 °C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	240 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h, 50N	225 °C	ISO 306
Coeff. of linear therm. expansion, parallel	10 E-6/K	ISO 11359-1/-2
CLTE, Parallel, 23-55°C(73-130°F)	11 E-6/K	ASTM E 831



Rynite® FR543 NC010

THERMOPLASTIC POLYESTER RESIN

Coeff. of linear therm. expansion, normal	80 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, Normal, 23-55 °C (73-130 °F)	79 E-6/K	ASTM E 831
Thermal conductivity	0.31 W/(m K)	ISO 22007-2
Thermal conductivity of melt	0.3 W/(m K)	Internal
Spec. heat capacity of melt	1560 J/(kg K)	Internal
RTI, electrical, 0.75mm	155 °C	UL 746B
RTI, electrical, 1.5mm	155 °C	UL 746B
RTI, electrical, 3mm	155 °C	UL 746B
RTI, impact, 0.75mm	155 °C	UL 746B
RTI, impact, 1.5mm	155 °C	UL 746B
RTI, impact, 3mm	155 °C	UL 746B
RTI, strength, 0.75mm	155 °C	UL 746B
RTI, strength, 1.5mm	155 °C	UL 746B
RTI, strength, 3mm	155 °C	UL 746B

Flammability

Burning Behav. at 1.5mm nom. thickn.	V-0 class	UL 94
Thickness tested	1.5 mm	UL 94
UL recognition	yes	UL 94
Burning Behav. at thickness h	V-0 class	UL 94
Thickness tested	0.8 mm	UL 94
UL recognition	yes	UL 94
Burning Behav. 5V at thickness h	5VA class	UL 94
Thickness tested	1.5 mm	UL 94
UL recognition	yes	UL 94
Oxygen index	35 %	ISO 4589-1/-2
Glow Wire Flammability Index, 3mm	960 °C	IEC 60695-2-12
Glow Wire Ignition Temperature, 3mm	960 °C	IEC 60695-2-13
Glow Wire Temperature, No Flame, 0.75mm	960 °C	IEC 60335-1
Glow Wire Temperature, No Flame, 1mm	960 °C	IEC 60335-1
Glow Wire Temperature, No Flame, 1.5mm	960 °C	IEC 60335-1
Glow Wire Temperature, No Flame, 2mm	960 °C	IEC 60335-1
Glow Wire Temperature, No Flame, 3mm	960 °C	IEC 60335-1
FMVSS Class	B	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<80 mm/min	ISO 3795 (FMVSS 302)

Electrical properties

Relative permittivity, 100Hz	4.6	IEC 62631-2-1
Relative permittivity, 1MHz	4.1	IEC 62631-2-1
Dissipation factor, 100Hz	368 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	131 E-4	IEC 62631-2-1



Rynite® FR543 NC010

THERMOPLASTIC POLYESTER RESIN

Volume resistivity	>1E13 Ohm.m	IEC 62631-3-1
Surface resistivity	1E15 Ohm	IEC 62631-3-2
Electric strength	37 kV/mm	IEC 60243-1
Comparative tracking index	225	IEC 60112
Comparative tracking index	2 PLC	UL 746A

Other properties

Humidity absorption, 2mm	0.1 %	Sim. to ISO 62
Water absorption, 2mm	0.6 %	Sim. to ISO 62
Density	1790 kg/m³	ISO 1183
Density of melt	1610 kg/m³	Internal

Injection

Drying Recommended	yes	
Drying Temperature	120 °C	
Drying Time, Dehumidified Dryer	4 - 6 h	
Processing Moisture Content	≤0.02 ^[1] %	
Melt Temperature Optimum	280 °C	Internal
Min. melt temperature	270 °C	
Max. melt temperature	290 °C	
Screw tangential speed	≤0.2 m/s	
Mold Temperature Optimum	110 °C	
Min. mould temperature	100 °C	
Max. mould temperature	120 ^[2] °C	
Hold pressure range	≥80 MPa	
Hold pressure time	4 s/mm	
Back pressure	As low as possible	
Ejection temperature	170 °C	Internal

[1]: At levels above 0.02%, strength and toughness will decrease, even though parts may not exhibit surface defects.

[2]: (6mm - 1mm thickness)

Characteristics


Additives	Release agent, Flame retardant
-----------	--------------------------------



Rynite® FR543 NC010

THERMOPLASTIC POLYESTER RESIN


Viscosity-shear rate

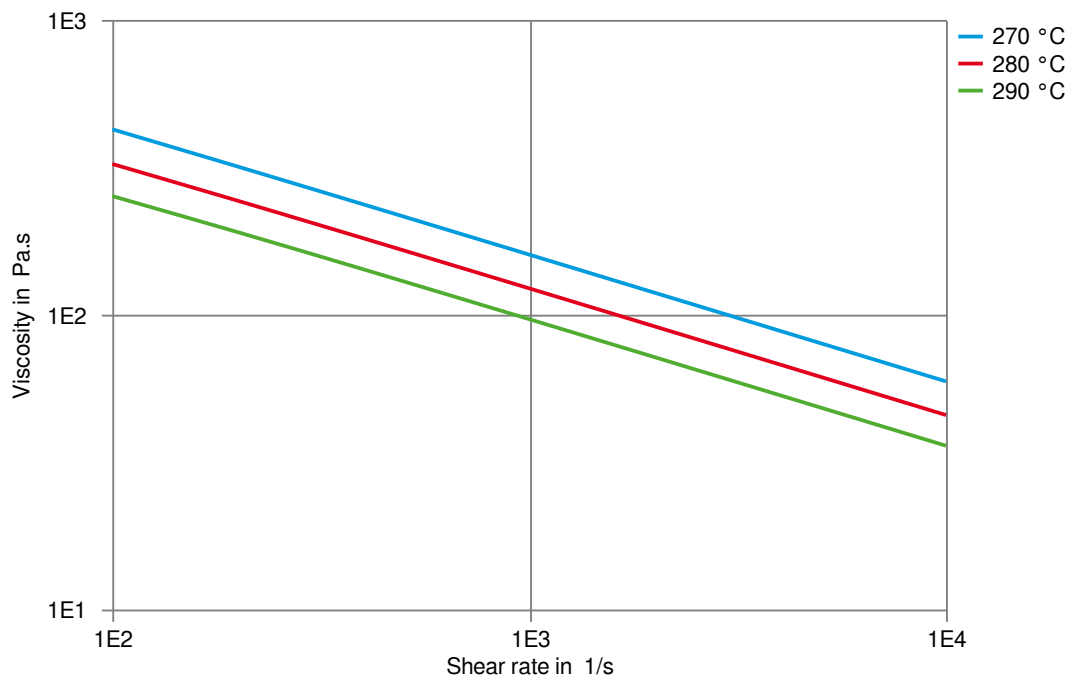

Rynite® FR543 NC010

THERMOPLASTIC POLYESTER RESIN


Shearstress-shear rate

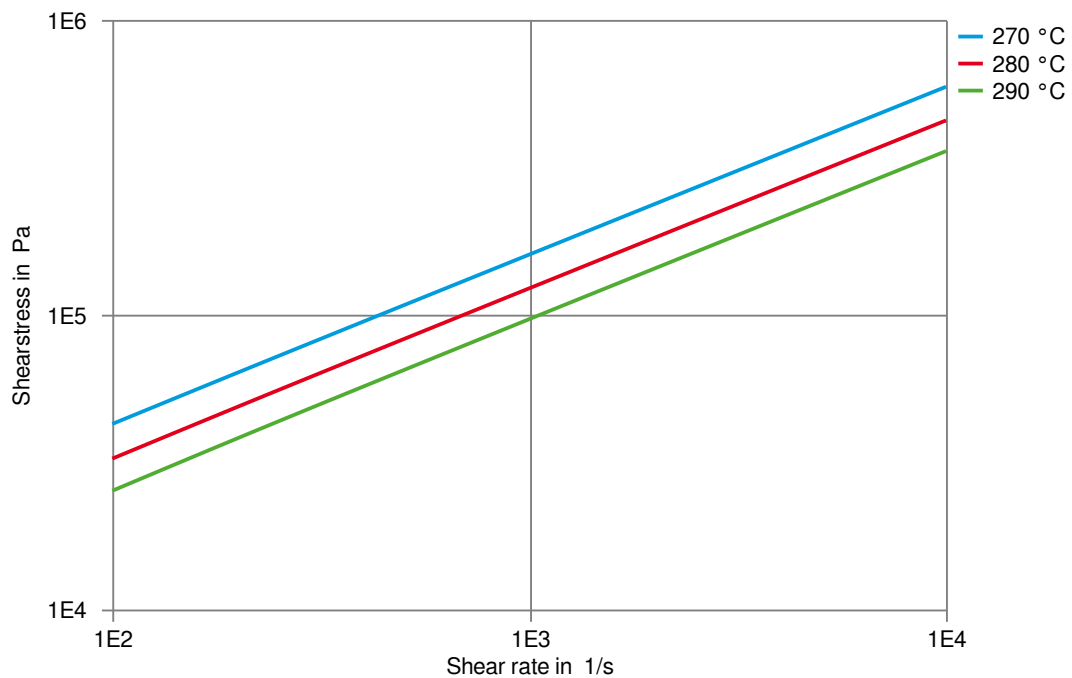

Rynite® FR543 NC010

THERMOPLASTIC POLYESTER RESIN


Stress-strain

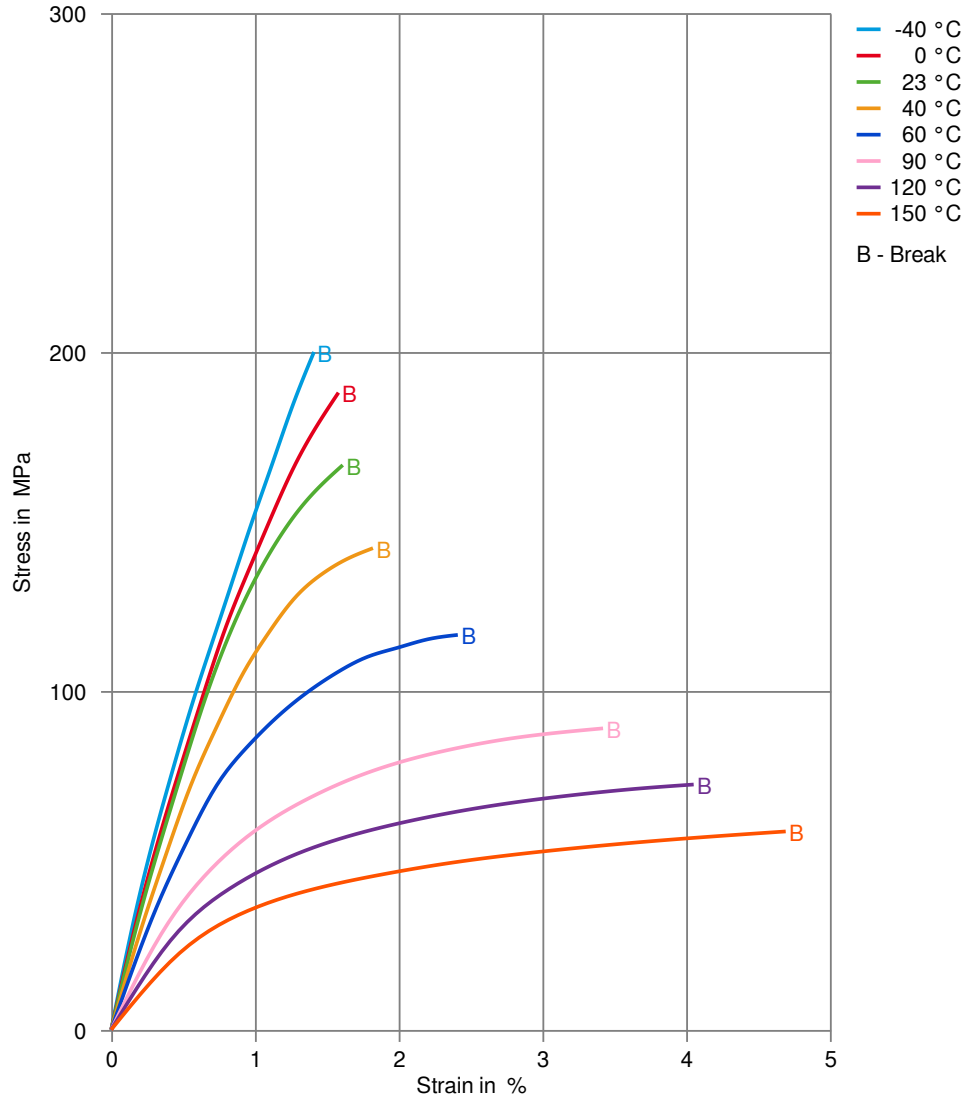

Rynite® FR543 NC010

THERMOPLASTIC POLYESTER RESIN


Secant modulus-strain

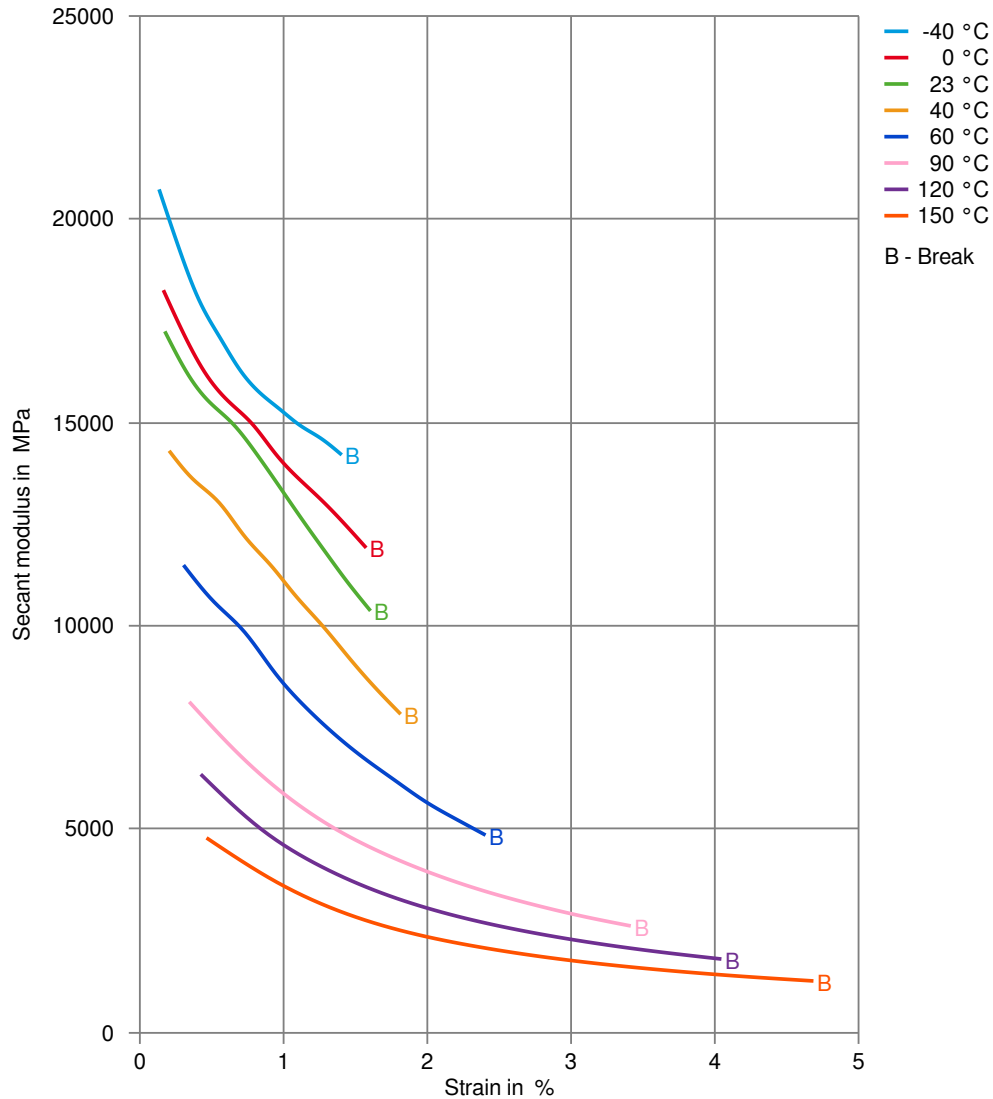

Rynite® FR543 NC010

THERMOPLASTIC POLYESTER RESIN

Specific volume-temperature (pvT)

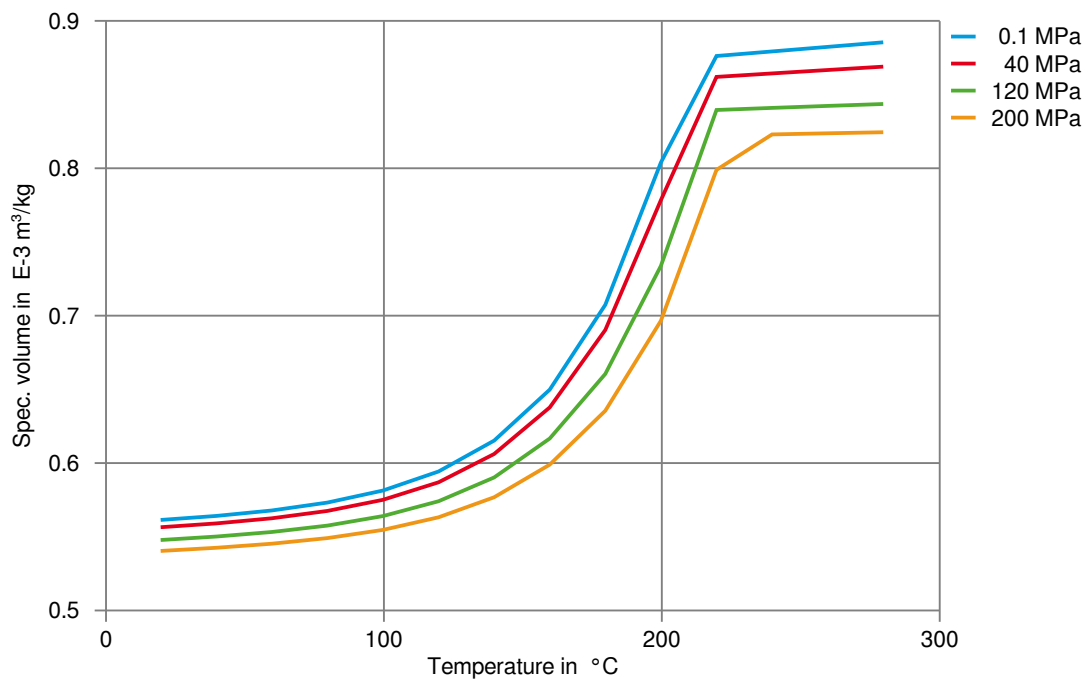

Rynite® FR543 NC010

THERMOPLASTIC POLYESTER RESIN

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass), 23°C
- ✓ Citric Acid solution (10% by mass), 23°C
- ✓ Lactic Acid (10% by mass), 23°C
- ✗ Hydrochloric Acid (36% by mass), 23°C
- ✗ Nitric Acid (40% by mass), 23°C
- ✗ Sulfuric Acid (38% by mass), 23°C
- ✗ Sulfuric Acid (5% by mass), 23°C
- ✗ Chromic Acid solution (40% by mass), 23°C

Bases

- ✗ Sodium Hydroxide solution (35% by mass), 23°C
- ✓ Sodium Hydroxide solution (1% by mass), 23°C
- ✓ Ammonium Hydroxide solution (10% by mass), 23°C

Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✓ Ethanol, 23°C

Hydrocarbons

- ✓ n-Hexane, 23°C
- ✓ Toluene, 23°C
- ✓ iso-Octane, 23°C

Ketones

- ✓ Acetone, 23°C

Ethers

- ✓ Diethyl ether, 23°C

Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23°C
- ✗ SAE 10W40 multigrade motor oil, 130°C
- ✗ SAE 80/90 hypoid-gear oil, 130°C
- ✓ Insulating Oil, 23°C

Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5, 60°C
- ✓ ISO 1817 Liquid 2 - M15E4, 60°C
- ✓ ISO 1817 Liquid 3 - M3E7, 60°C
- ✓ ISO 1817 Liquid 4 - M15, 60°C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 90°C
- ✗ Diesel fuel (pref. ISO 1817 Liquid F), >90°C



Rynite® FR543 NC010

THERMOPLASTIC POLYESTER RESIN

Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C
- ✓ Sodium Carbonate solution (20% by mass), 23°C
- ✓ Sodium Carbonate solution (2% by mass), 23°C
- ✓ Zinc Chloride solution (50% by mass), 23°C

Other

- ✓ Ethyl Acetate, 23°C
- ✗ Hydrogen peroxide, 23°C
- ✗ DOT No. 4 Brake fluid, 130°C
- ✗ Ethylene Glycol (50% by mass) in water, 108°C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23°C
- ✓ 50% Oleic acid + 50% Olive Oil, 23°C
- ✓ Water, 23°C
- ✗ Water, 90°C
- ✓ Phenol solution (5% by mass), 23°C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

