

HOSTAFORM® C 9021 ECO-B

General purpose injection molding grade

Chemical abbreviation according to ISO 1043-1: POM Molding compound ISO 29988- POM-K, M-GNR, 03-002 POM copolymer Standard-Injection molding type with high rigidity, hardness and toughness; good chemical resistance to solvents, fuel and strong alkalis as well as good hydrolysis resistance; high resistance to thermal and oxidative degradation.

Monomers and additives are listed in EU-Regulation (EU) 10/2011 FDA compliant according to 21 CFR 177.2470 .Burning rate ISO 3795 and FMVSS 302 < 75 mm/min for a thickness more than 1 mm. Ranges of applications: automotive engineering, precision engineering, electric and electronical industry, domestic appliances. FDA = Food and Drug Administration (USA) FMVSS = Federal Motor Vehicle Safety Standard (USA) UL = Underwriters Laboratories (USA).

ECO-B: Hostaform ECO-B is a POM-Copolymer with the same properties and performance as standard grades but produced with sustainability in mind. Using a mass-balance approach, biogenic feedstocks are used to offset the use of fossil-based raw materials and decrease greenhouse gas emissions. The process is audited and certified according to the ISCC Plus mass balance approach.

Product information

Part Marking Code	POM	ISO 11469
-------------------	-----	-----------

Rheological properties

Melt volume-flow rate	8 cm ³ /10min	ISO 1133
Temperature	190 °C	
Load	2.16 kg	
Moulding shrinkage range, parallel	2.0 %	ISO 294-4, 2577
Moulding shrinkage range, normal	1.9 %	ISO 294-4, 2577

Typical mechanical properties

Tensile Modulus	2850 MPa	ISO 527-1/-2
Yield stress, 50mm/min	64 MPa	ISO 527-1/-2
Yield strain, 50mm/min	9 %	ISO 527-1/-2
Nominal strain at break	30 %	ISO 527-1/-2
Flexural Modulus	2700 MPa	ISO 178
Flexural Stress at 3.5%	72 MPa	ISO 178
Compressive stress at 1% strain	24 MPa	ISO 604
Tensile creep modulus, 1h	2500 MPa	ISO 899-1
Tensile creep modulus, 1000h	1300 MPa	ISO 899-1
Charpy impact strength, 23°C	220 ^[P] kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	220 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	6.5 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	6 kJ/m ²	ISO 179/1eA
Ball indentation hardness, H 358/30	144 MPa	ISO 2039-1
Poisson's ratio	0.399	

[P]: Partial Break

Printed: 2023-09-15



HOSTAFORM® C 9021 ECO-B

Thermal properties

Melting temperature, 10 °C/min	166 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	104 °C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	160 °C	ISO 75-1/-2
Vicat softening temperature, 50 °C/h, 50N	150 °C	ISO 306
Coeff. of linear therm. expansion, parallel	110 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	110 E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.155 W/(m K)	Internal
Eff. thermal diffusivity	4.85E-8 m²/s	Internal
Spec. heat capacity of melt	2210 J/(kg K)	Internal

Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	UL 94
Thickness tested	1.5 mm	UL 94
Burning Behav. at thickness h	HB class	UL 94
Thickness tested	3.00 mm	UL 94
UL recognition	yes	UL 94

Electrical properties

Relative permittivity, 100Hz	4	IEC 62631-2-1
Relative permittivity, 1MHz	4	IEC 62631-2-1
Dissipation factor, 100Hz	20 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	50 E-4	IEC 62631-2-1
Volume resistivity	1E12 Ohm.m	IEC 62631-3-1
Surface resistivity	1E14 Ohm	IEC 62631-3-2
Electric strength	35 kV/mm	IEC 60243-1
Comparative tracking index	PLC 0 PLC	UL 746A

Other properties

Humidity absorption, 2mm	0.2 %	Sim. to ISO 62
Water absorption, 2mm	0.65 %	Sim. to ISO 62
Density	1410 kg/m³	ISO 1183
Density of melt	1200 kg/m³	Internal

Injection

Drying Temperature	100 - 120 °C	
Drying Time, Dehumidified Dryer	3 - 4 h	
Processing Moisture Content	0.15 %	
Melt Temperature Optimum	210 °C	Internal
Screw tangential speed	0.2 - 0.21 m/s	
Max. mould temperature	80 - 120 °C	
Back pressure	4 MPa	
Injection speed	slow-medium	

Printed: 2023-09-15



HOSTAFORM® C 9021 ECO-B

Ejection temperature

140 °C

Internal

Characteristics

Additives

Release agent, Biobased

Additional information

Injection molding

Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.

Film extrusion

Standard extruders with grooved feed zone and short compression screws (minimum 25 D) will fit.

Melt temperature 180-190 °C

Other extrusion

Standard extruders with grooved feed zone and short compression screws (minimum 25 D) will fit.

Melt temperature 180-190 °C

Sheet extrusion


Standard extruders with grooved feed zone and short compression screws (minimum 25 D) will fit.

Melt temperature 180-190 °C




HOSTAFORM® C 9021 ECO-B

Viscosity-shear rate

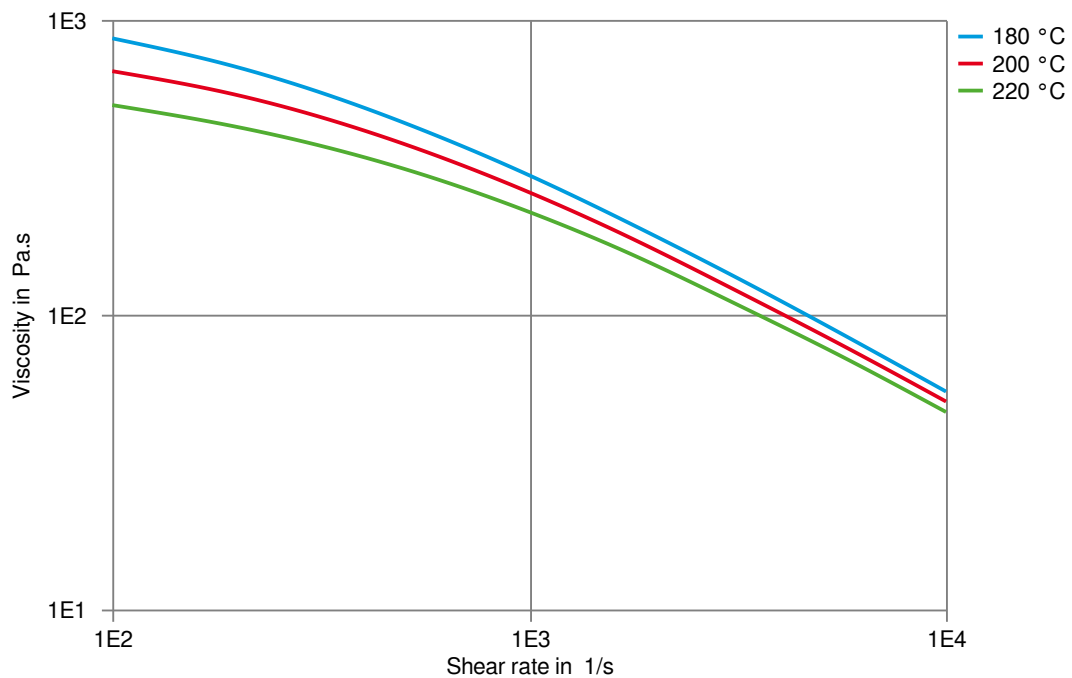

HOSTAFORM® C 9021 ECO-B

Shearstress-shear rate

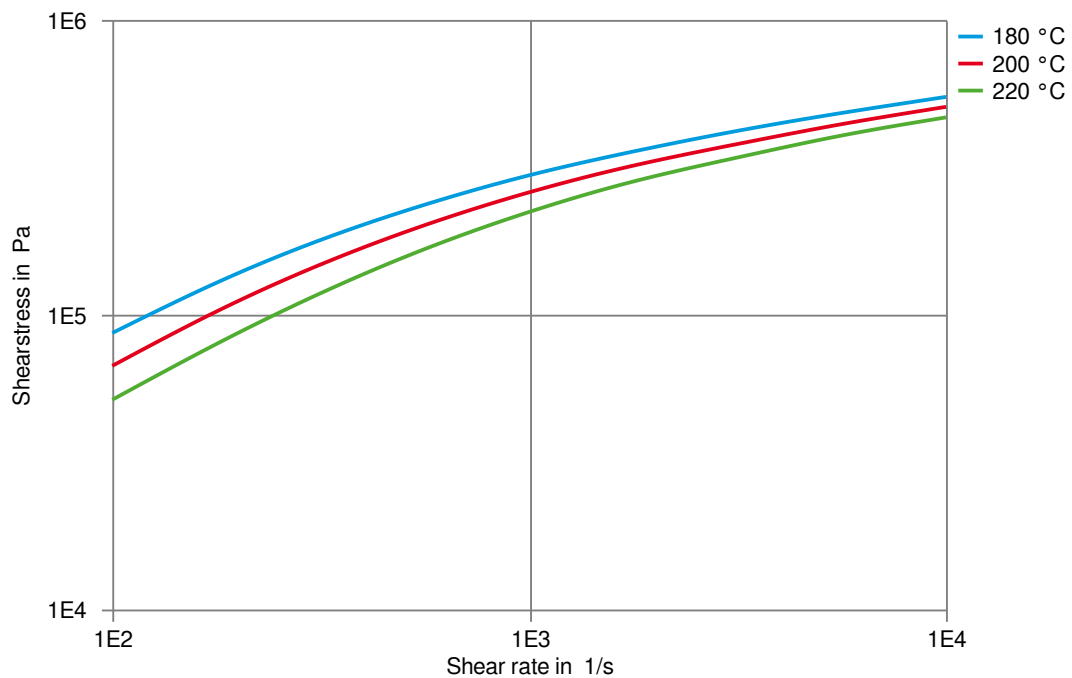


Printed: 2023-09-15



HOSTAFORM® C 9021 ECO-B

Stress-strain

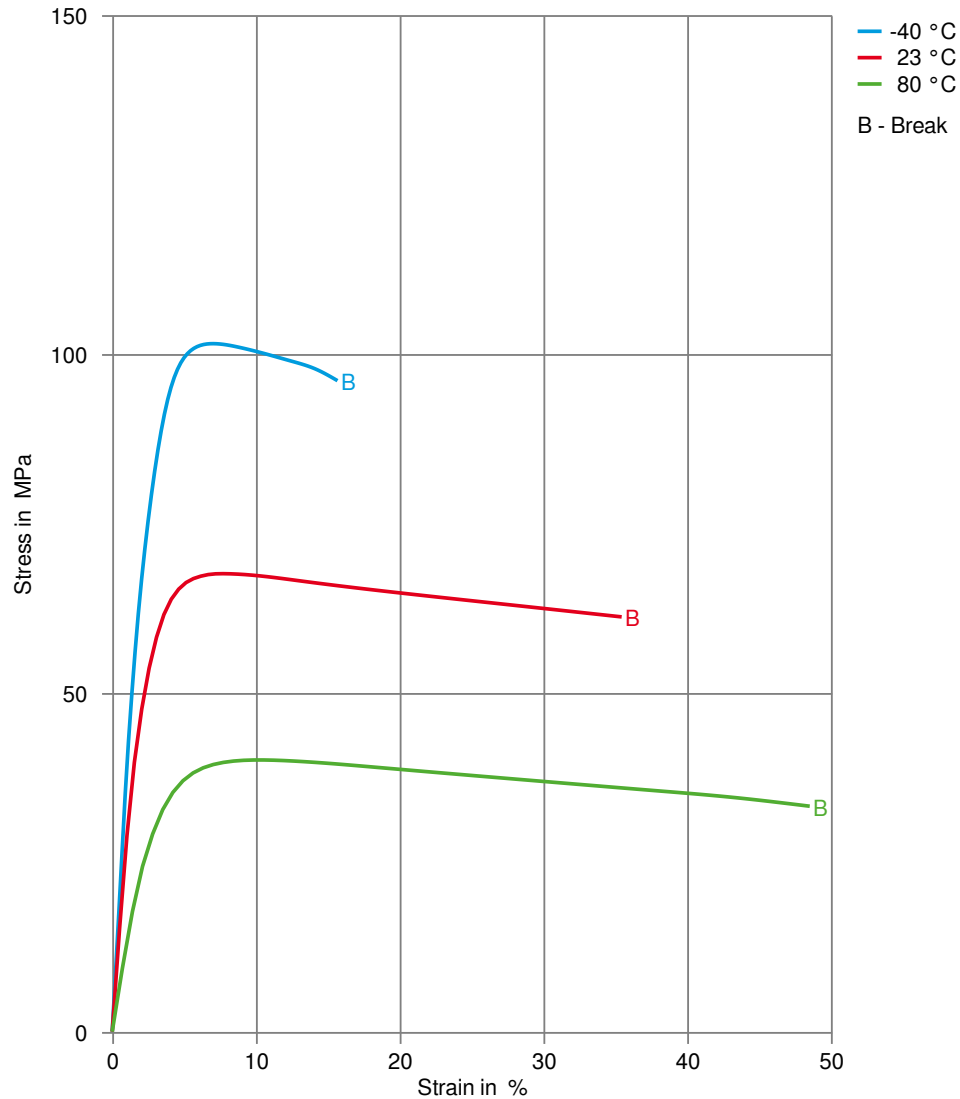


Printed: 2023-09-15



HOSTAFORM® C 9021 ECO-B

Secant modulus-strain

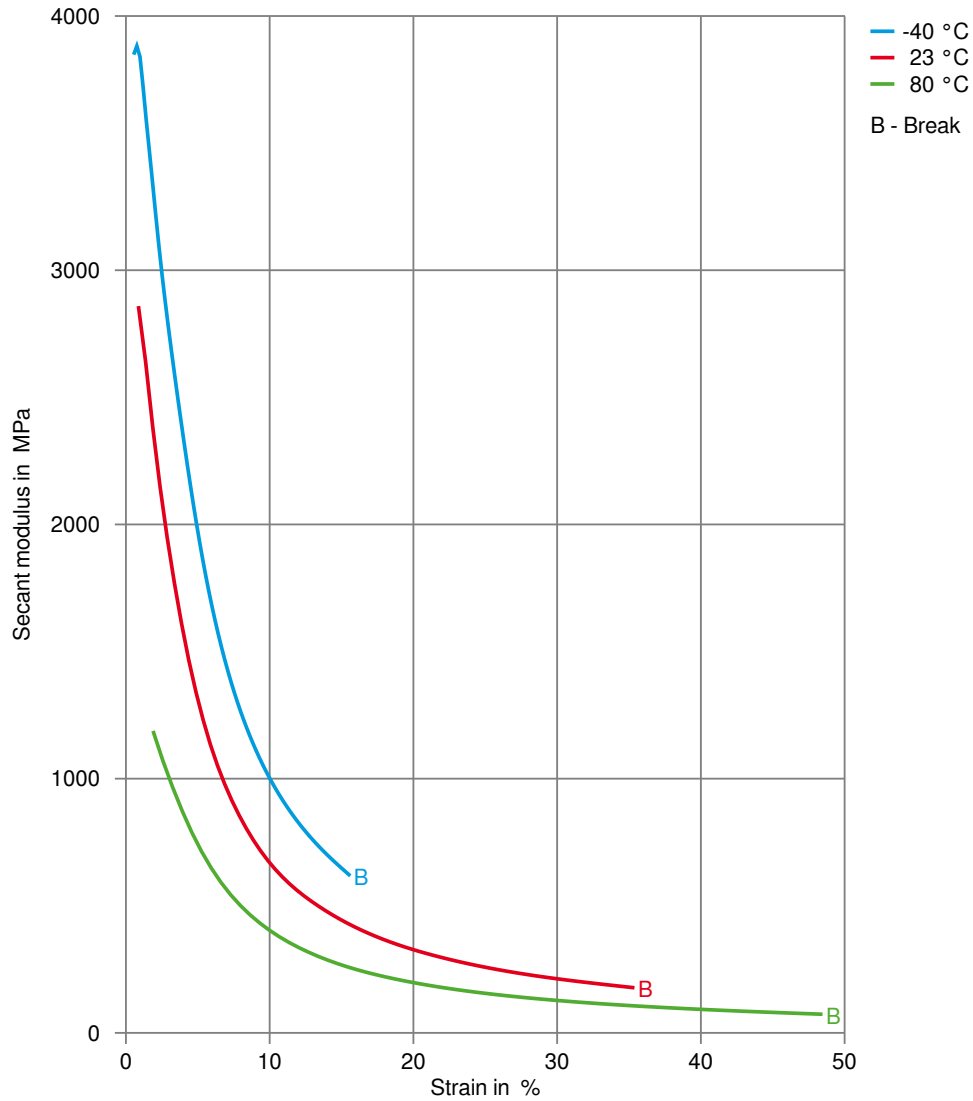


Printed: 2023-09-15



HOSTAFORM® C 9021 ECO-B

Stress-strain (isochronous) 23°C

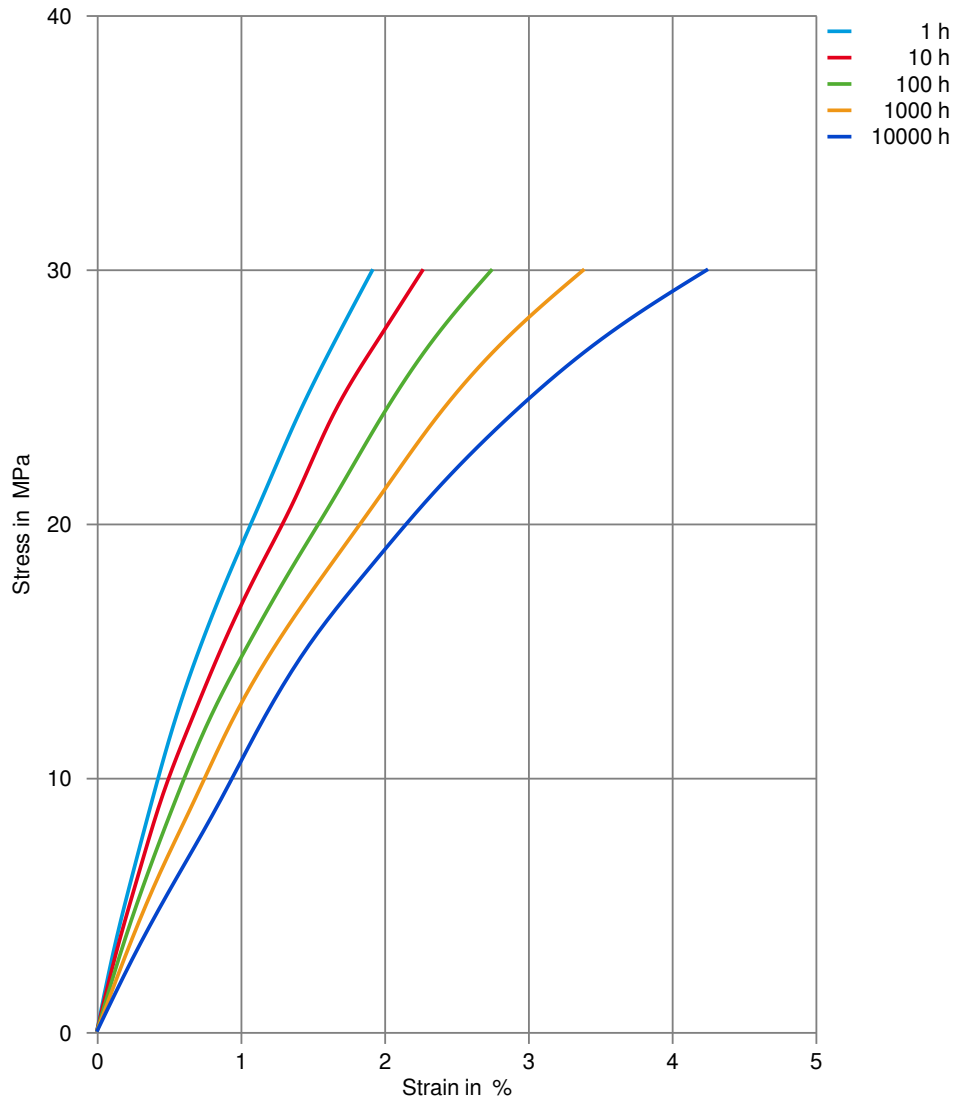


Printed: 2023-09-15



HOSTAFORM® C 9021 ECO-B

Creep modulus-time 23°C

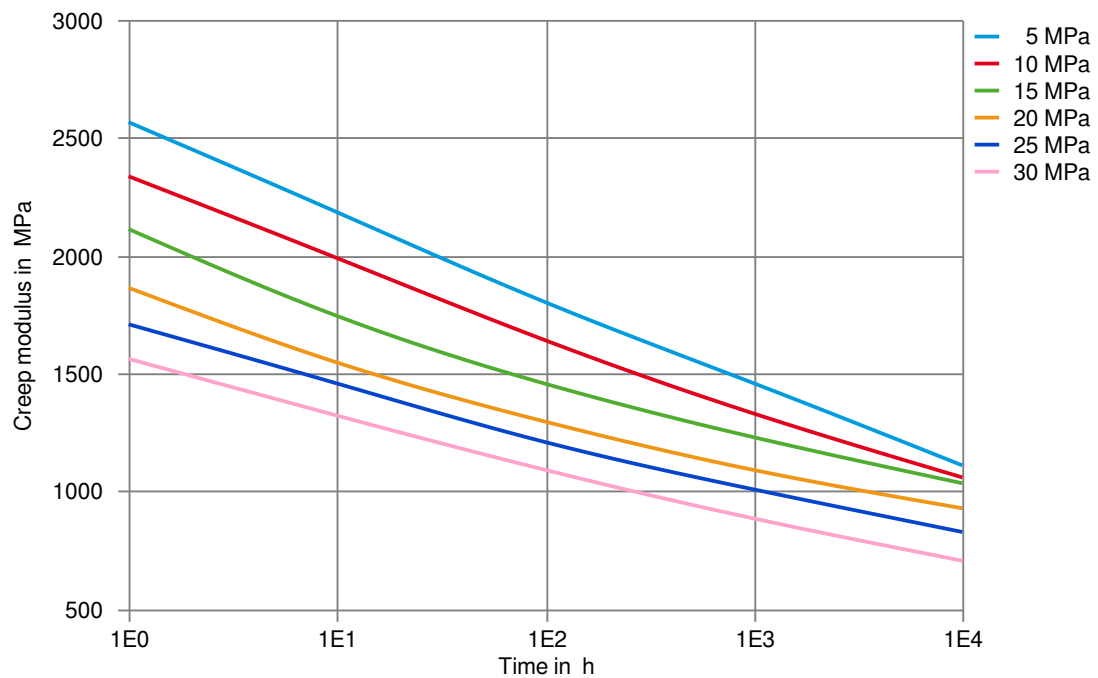


Printed: 2023-09-15



HOSTAFORM® C 9021 ECO-B

True stress-strain

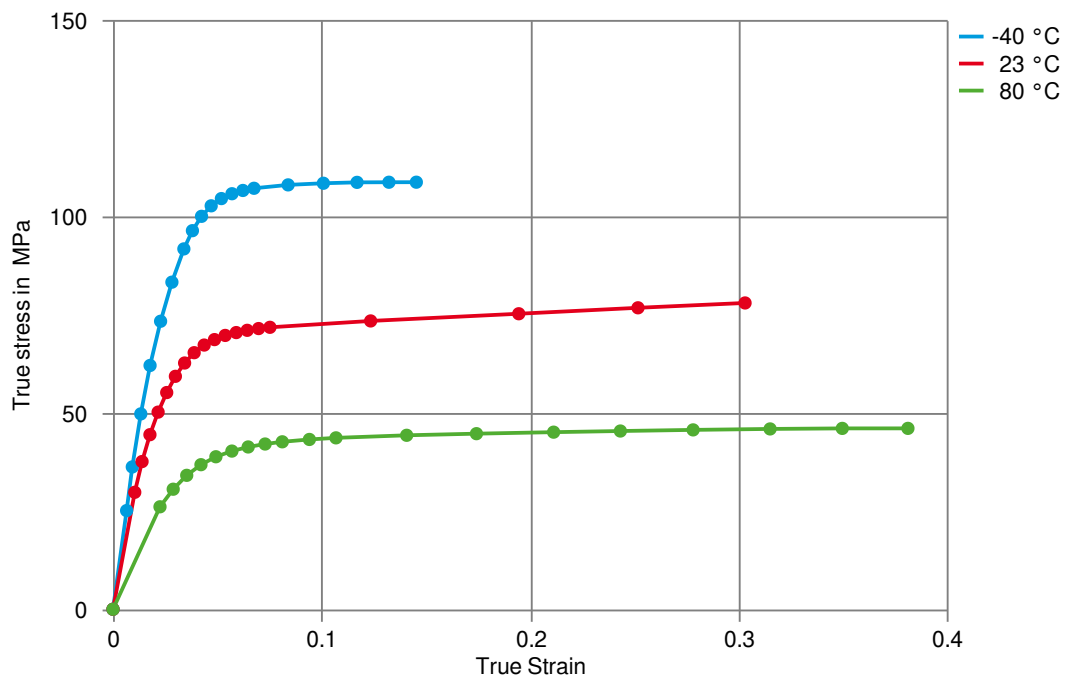

Printed: 2023-09-15



HOSTAFORM® C 9021 ECO-B

Processing Texts

Pre-drying	Drying is not normally required. If material has come in contact with moisture through improper storage or handling or through regrind use, drying may be necessary to prevent splay and odor problems.
Longer pre-drying times/storage	The product can then be stored in standard conditions until processed.
Injection molding	Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.
Injection molding Preprocessing	General drying is not necessary due to low moisture absorption of the resin. In case of bad storage conditions (water contact or condensed water) the use of a recirculating air dryer (100 to 120 °C / max. 40 mm layer / 3 to 6 hours) is recommended. Max. Water content 0,2 %
Injection molding Postprocessing	Conditioning e.g. moisturizing is not necessary.

Printed: 2023-09-15

