

HOSTAFORM® C 9021 TF

Injection molding type like C 9021; with PTFE modified

Chemical abbreviation according to ISO 1043-1: POM Molding compound ISO 29988- POM-K, M-GNS, 02-002 POM copolymer Injection molding type, modified with PTFE; good chemical resistance to solvents, fuel and strong alkalis as well as good hydrolysis resistance; high resistance to thermal and oxidative degradation; for sliding combinations with very low coefficient of friction. UL-registration in natural and a thickness more than 1.57 mm as UL 94 HB, temperature index UL 746 B electrical 105 °C, mechanical 95 °C (tensile impact) and 100 °C (tensile). Burning rate ISO 3795 and FMVSS 302 < 100 mm/min for a thickness more than 1 mm. Ranges of applications: For sliding combinations with very low coefficient of friction. FMVSS = Federal Motor Vehicle Safety Standard (USA) UL = Underwriters Laboratories (USA)

Product information

Part Marking Code	POM	ISO 11469
-------------------	-----	-----------

Rheological properties

Melt volume-flow rate	6 cm ³ /10min	ISO 1133
Temperature	190 °C	
Load	2.16 kg	
Moulding shrinkage range, parallel	2.0 %	ISO 294-4, 2577
Moulding shrinkage range, normal	1.7 %	ISO 294-4, 2577

Typical mechanical properties

Tensile Modulus	2500 MPa	ISO 527-1/-2
Yield stress, 50mm/min	48 MPa	ISO 527-1/-2
Yield strain, 50mm/min	10 %	ISO 527-1/-2
Nominal strain at break	16 %	ISO 527-1/-2
Flexural Modulus	2400 MPa	ISO 178
Tensile creep modulus, 1h	2100 MPa	ISO 899-1
Tensile creep modulus, 1000h	1200 MPa	ISO 899-1
Charpy impact strength, 23 °C	60 kJ/m ²	ISO 179/1eU
Charpy impact strength, -30 °C	60 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23 °C	4 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30 °C	4 kJ/m ²	ISO 179/1eA
Ball indentation hardness, H 358/30	120 MPa	ISO 2039-1

Thermal properties

Melting temperature, 10 °C/min	166 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	98 °C	ISO 75-1/-2
Vicat softening temperature, 50 °C/h, 50N	145 °C	ISO 306
Coeff. of linear therm. expansion, parallel	110 E-6/K	ISO 11359-1/-2



HOSTAFORM® C 9021 TF

Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	UL 94
Thickness tested	1.6 mm	UL 94
Burning Behav. at thickness h	HB class	UL 94
Thickness tested	3.18 mm	UL 94
UL recognition	yes	UL 94

Electrical properties

Relative permittivity, 100Hz	3.7	IEC 62631-2-1
Relative permittivity, 1MHz	3.7	IEC 62631-2-1
Dissipation factor, 100Hz	20 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	80 E-4	IEC 62631-2-1
Volume resistivity	1E12 Ohm.m	IEC 62631-3-1
Surface resistivity	1E14 Ohm	IEC 62631-3-2
Electric strength	33 kV/mm	IEC 60243-1
Comparative tracking index	PLC 0 PLC	UL 746A

Other properties

Humidity absorption, 2mm	0.2 %	Sim. to ISO 62
Water absorption, 2mm	0.65 %	Sim. to ISO 62
Density	1510 kg/m³	ISO 1183

Injection

Drying Temperature	100 - 120 °C	
Drying Time, Dehumidified Dryer	3 - 4 h	
Processing Moisture Content	0.15 %	
Melt Temperature Optimum	190 °C	Internal
Screw tangential speed	0.2 - 0.21 m/s	
Max. mould temperature	80 - 120 °C	
Back pressure	2 MPa	
Injection speed	slow	

Characteristics

Additives	Release agent
-----------	---------------


Additional information

Injection molding	Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.
-------------------	--



HOSTAFORM® C 9021 TF

Stress-strain

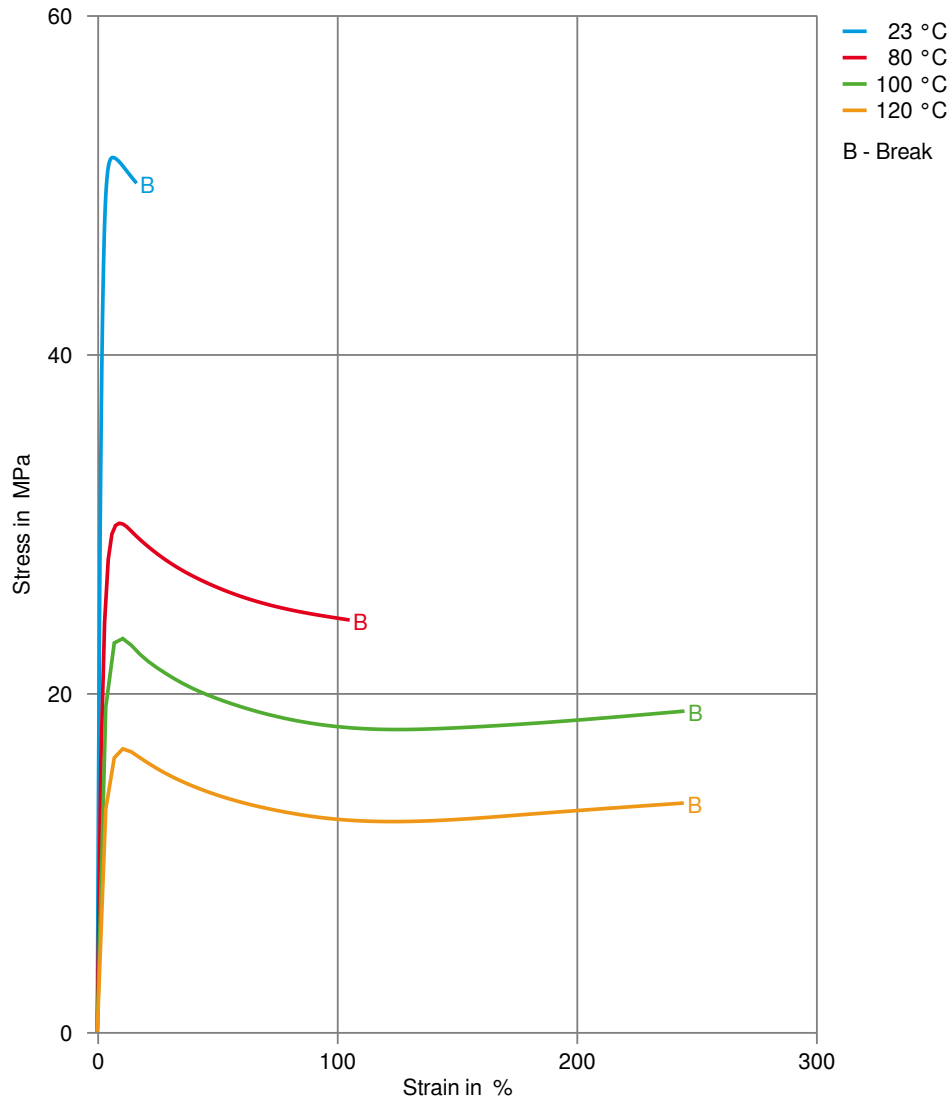


Printed: 2023-09-15



HOSTAFORM® C 9021 TF

Secant modulus-strain

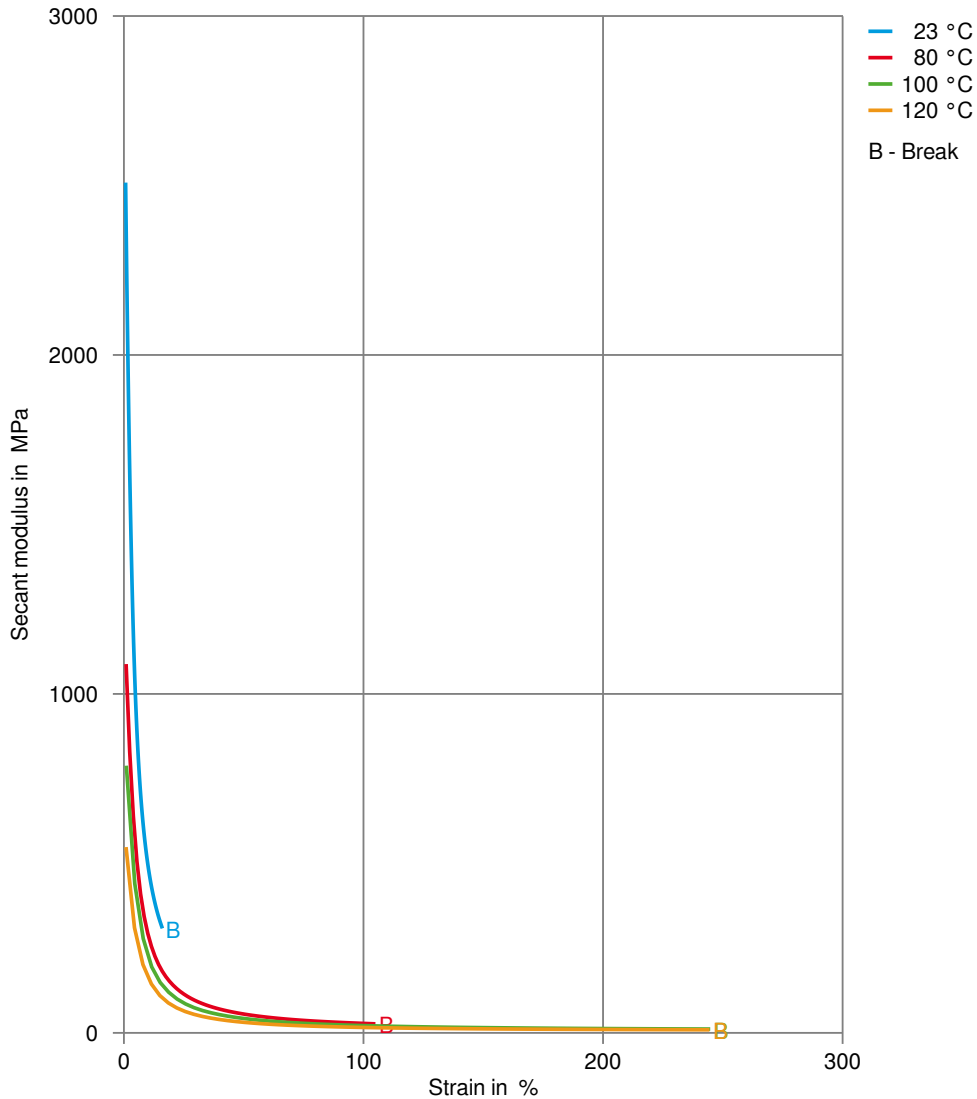


Printed: 2023-09-15



HOSTAFORM® C 9021 TF

True stress-strain

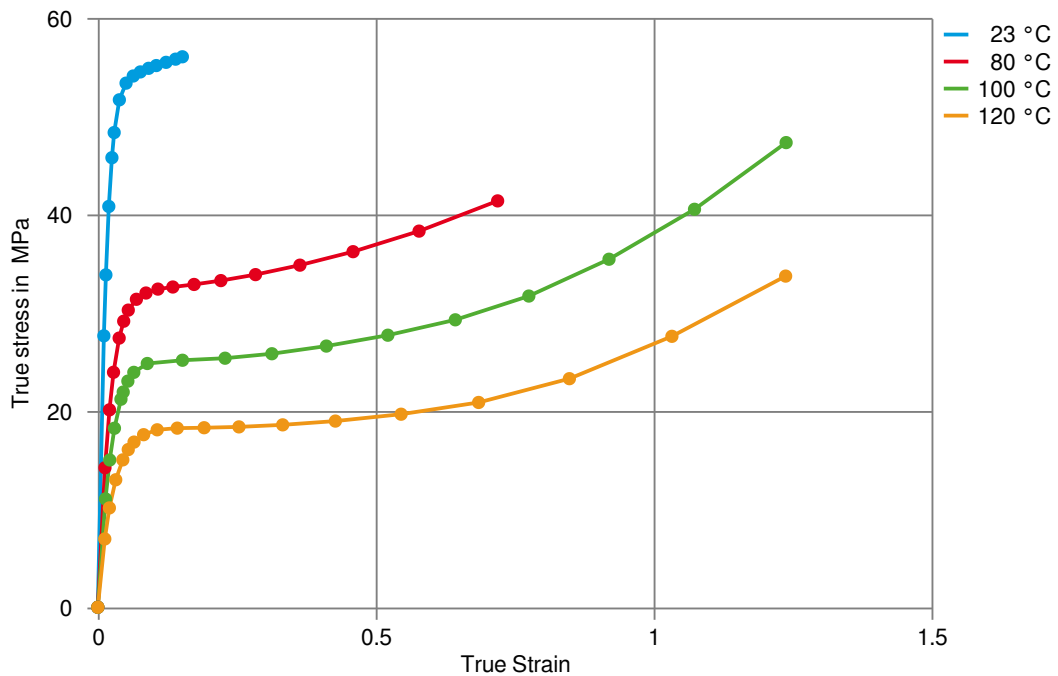

Printed: 2023-09-15



HOSTAFORM® C 9021 TF

Processing Texts

Pre-drying	Drying is not normally required. If material has come in contact with moisture through improper storage or handling or through regrind use, drying may be necessary to prevent splay and odor problems.
Longer pre-drying times/storage	The product can then be stored in standard conditions until processed.
Injection molding	Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.
Injection molding Preprocessing	General drying is not necessary due to low moisture absorption of the resin. In case of bad storage conditions (water contact or condensed water) the use of a recirculating air dryer (100 to 120 °C / max. 40 mm layer / 3 to 6 hours) is recommended. Max. Water content 0,2 %
Injection molding Postprocessing	Conditioning e.g. moisturizing is not necessary.

Other Approvals

Other Approvals	OEM	Specification	Additional Information
	BMW	GS 93016	
	Bosch	N28 BN22-X017	Natural
	Continental	TST N 055 54.18	
	Mercedes-Benz Group (Daimler)	DBL 5410	(5410.00)
	GM	GMW22P-POM-C2S	Natural & Black
	Nissan	POM(0xx)-Ixx-1	
	SAIC Motor	SMTC 5 310 020	

