

HOSTAFORM® C 9021 LS

UV resistant

POM copolymer

Standard Injection molding type, UV-stabilized with UV-stabilizers.; good chemical resistance to solvents, fuel and strong alkalis as well as good hydrolysis resistance; high resistance to thermal and oxidative degradation.

Burning rate ISO 3795 and FMVSS 302 < 100 mm/min for a thickness more than 1 mm.

FMVSS = Federal Motor Vehicle Safety Standard (USA)

Rheological properties

Melt volume-flow rate	8 cm ³ /10min	ISO 1133
Temperature	190 °C	
Load	2.16 kg	
Moulding shrinkage range, parallel	2.0 %	ISO 294-4, 2577
Moulding shrinkage range, normal	1.8 %	ISO 294-4, 2577

Typical mechanical properties

Tensile Modulus	2850 MPa	ISO 527-1/-2
Yield stress, 50mm/min	64 MPa	ISO 527-1/-2
Yield strain, 50mm/min	9 %	ISO 527-1/-2
Nominal strain at break	30 %	ISO 527-1/-2
Tensile creep modulus, 1h	2500 MPa	ISO 899-1
Tensile creep modulus, 1000h	1300 MPa	ISO 899-1
Charpy impact strength, 23°C	220 ^[P] kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	220 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	6.5 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	6 kJ/m ²	ISO 179/1eA

[P]: Partial Break

Thermal properties

Melting temperature, 10°C/min	166 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	104 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h, 50N	150 °C	ISO 306
Coeff. of linear therm. expansion, parallel	110 E-6/K	ISO 11359-1/-2

Electrical properties

Relative permittivity, 100Hz	4	IEC 62631-2-1
Relative permittivity, 1MHz	4	IEC 62631-2-1
Dissipation factor, 100Hz	20 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	50 E-4	IEC 62631-2-1
Volume resistivity	1E12 Ohm.m	IEC 62631-3-1
Surface resistivity	1E14 Ohm	IEC 62631-3-2
Electric strength	35 kV/mm	IEC 60243-1
Comparative tracking index	PLC 0 PLC	UL 746A

Printed: 2023-09-15



HOSTAFORM® C 9021 LS

Other properties

Humidity absorption, 2mm	0.2 %	Sim. to ISO 62
Water absorption, 2mm	0.65 %	Sim. to ISO 62
Density	1410 kg/m ³	ISO 1183

Injection

Drying Temperature	100 - 120 °C
Drying Time, Dehumidified Dryer	3 - 4 h
Processing Moisture Content	0.15 %
Screw tangential speed	0.2 - 0.21 m/s
Back pressure	4 MPa
Injection speed	slow-medium

Characteristics

Additives

Release agent

Additional information


Injection molding

Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.



HOSTAFORM® C 9021 LS

Stress-strain

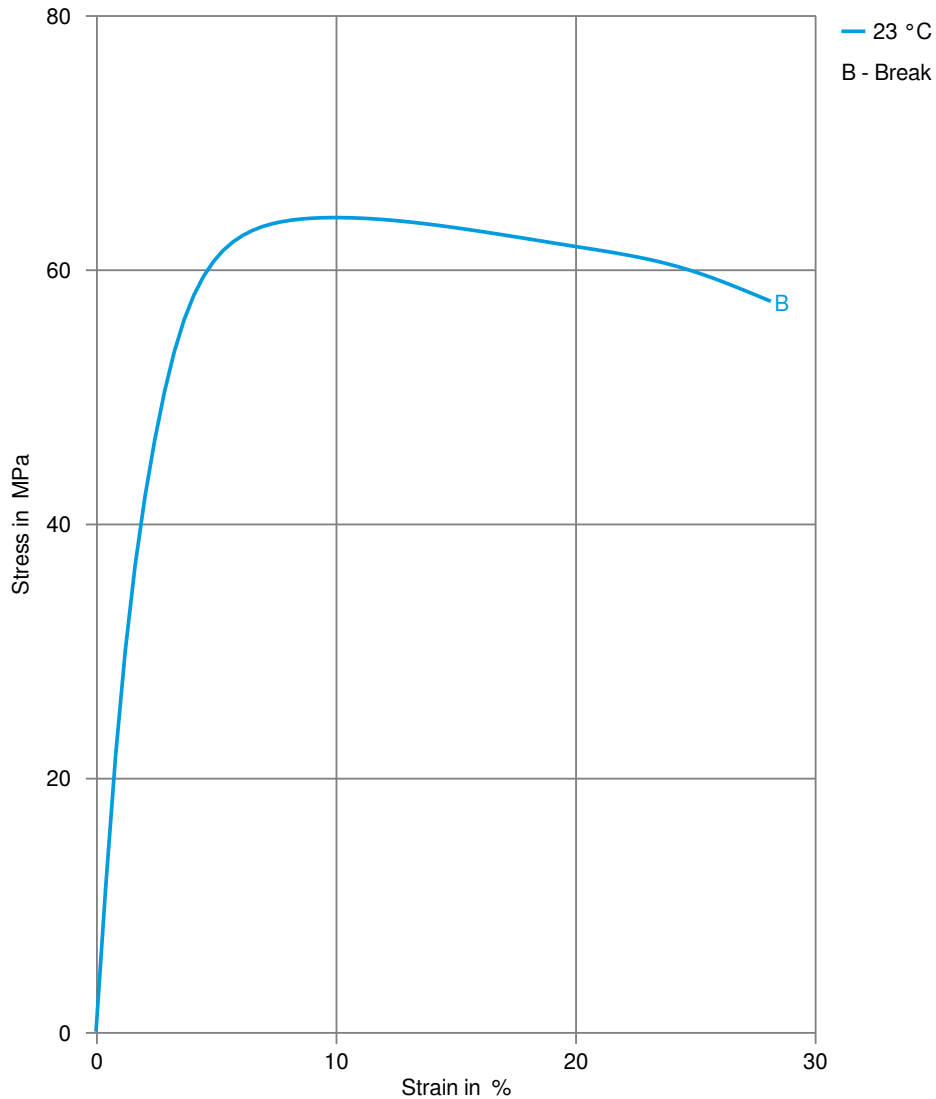


Printed: 2023-09-15



HOSTAFORM® C 9021 LS

Secant modulus-strain

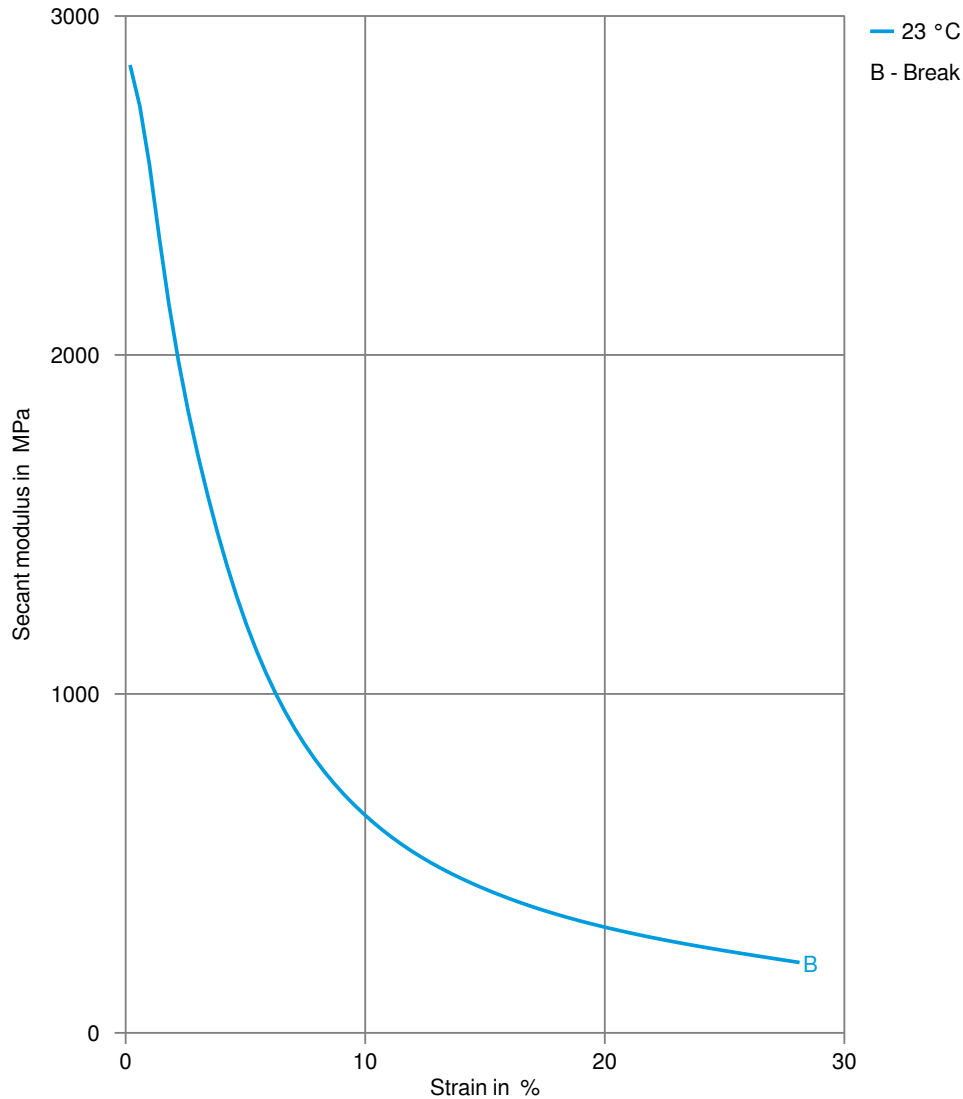

Printed: 2023-09-15



HOSTAFORM® C 9021 LS

Processing Texts

Pre-drying	Drying is not normally required. If material has come in contact with moisture through improper storage or handling or through regrind use, drying may be necessary to prevent splay and odor problems.
Injection molding	Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.
Injection molding Preprocessing	General drying is not necessary due to low moisture absorption of the resin. In case of bad storage conditions (water contact or condensed water) the use of a recirculating air dryer (100 to 120 °C / max. 40 mm layer / 3 to 6 hours) is recommended. Max. Water content 0,2 %
Injection molding Postprocessing	Conditioning e.g. moisturizing is not necessary.

Other Approvals

Other Approvals	OEM	Specification	Additional Information
	Bosch	N28 BN22-O017	Colors
	Stellantis - Chrysler	CPN 4624	Natural
	Stellantis - Chrysler	CPN 1758	100% color match
	Ford	WSK-M4D840-A1	(N), 100% color match
	Ford	WSK-M4D635-A2	Black 14
	Ford	WSK-M4D840-A2	100% color match, Black 14
	Ford	WSK-M4D840-A3	100% color match
	Ford	WSS-M4D840-B1	
	Nissan	POM-INx -W1-1	
	Nissan	POM-INx -W2-1	
	Stellantis - PSA Group	DT00102.AS POM - 001	

