

HOSTAFORM® MT®24U01 ECO-B

High flow, low melt viscosity, fast cycling grade for medical technology applications
 Hostaform® MT®24U01 ECO-B is a low melt viscosity for fast cycling, thin walled injection molding.

Hostaform® MT®24U01 ECO-B is a special grade developed for medical industry applications and complies with:

- CFR 21 (177.2470) of the Food and Drug Administration (FDA) and is listed in the Drug Master File (DMF 11559) and the Device Master File (MAF 1079)
- the corresponding EU and national registry requirements
- biocompatibility in tests corresponding to USP < 88> Class VI/ISO 10993
- low residual monomers
- no animal-derived constituents

ECO-B: Hostaform ECO-B is a POM-Copolymer with the same properties and performance as standard grades but produced with sustainability in mind. Using a mass-balance approach, biogenic feedstocks are used to offset the use of fossil-based raw materials and decrease greenhouse gas emissions. The process is audited and certified according to the ISCC Plus mass balance approach.

Rheological properties

Melt volume-flow rate	24 cm ³ /10min	ISO 1133
Temperature	190 °C	
Load	2.16 kg	
Moulding shrinkage range, parallel	1.9 %	ISO 294-4, 2577
Moulding shrinkage range, normal	1.8 %	ISO 294-4, 2577

Typical mechanical properties

Tensile Modulus	2900 MPa	ISO 527-1/-2
Yield stress, 50mm/min	65 MPa	ISO 527-1/-2
Yield strain, 50mm/min	7.5 %	ISO 527-1/-2
Nominal strain at break	17 %	ISO 527-1/-2
Flexural Modulus	2800 MPa	ISO 178
Tensile creep modulus, 1h	2500 MPa	ISO 899-1
Tensile creep modulus, 1000h	1300 MPa	ISO 899-1
Charpy impact strength, 23°C	170 kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	170 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	5.5 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	5.5 kJ/m ²	ISO 179/1eA
Ball indentation hardness, H 358/30	147 MPa	ISO 2039-1

Thermal properties

Melting temperature, 10°C/min	166 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	106 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h, 50N	151 °C	ISO 306
Coeff. of linear therm. expansion, parallel	110 E-6/K	ISO 11359-1/-2



HOSTAFORM® MT® 24U01 ECO-B

Other properties

Humidity absorption, 2mm	0.2 %	Sim. to ISO 62
Water absorption, 2mm	0.65 %	Sim. to ISO 62
Density	1410 kg/m ³	ISO 1183

Injection

Drying Temperature	100 - 120 °C	
Drying Time, Dehumidified Dryer	3 - 4 h	
Processing Moisture Content	0.15 %	
Melt Temperature Optimum	200 °C	Internal
Max. mould temperature	80 - 120 °C	
Back pressure	4 MPa	
Injection speed	slow-medium	


Characteristics

Additives	Biobased
-----------	----------




HOSTAFORM® MT® 24U01 ECO-B

Stress-strain

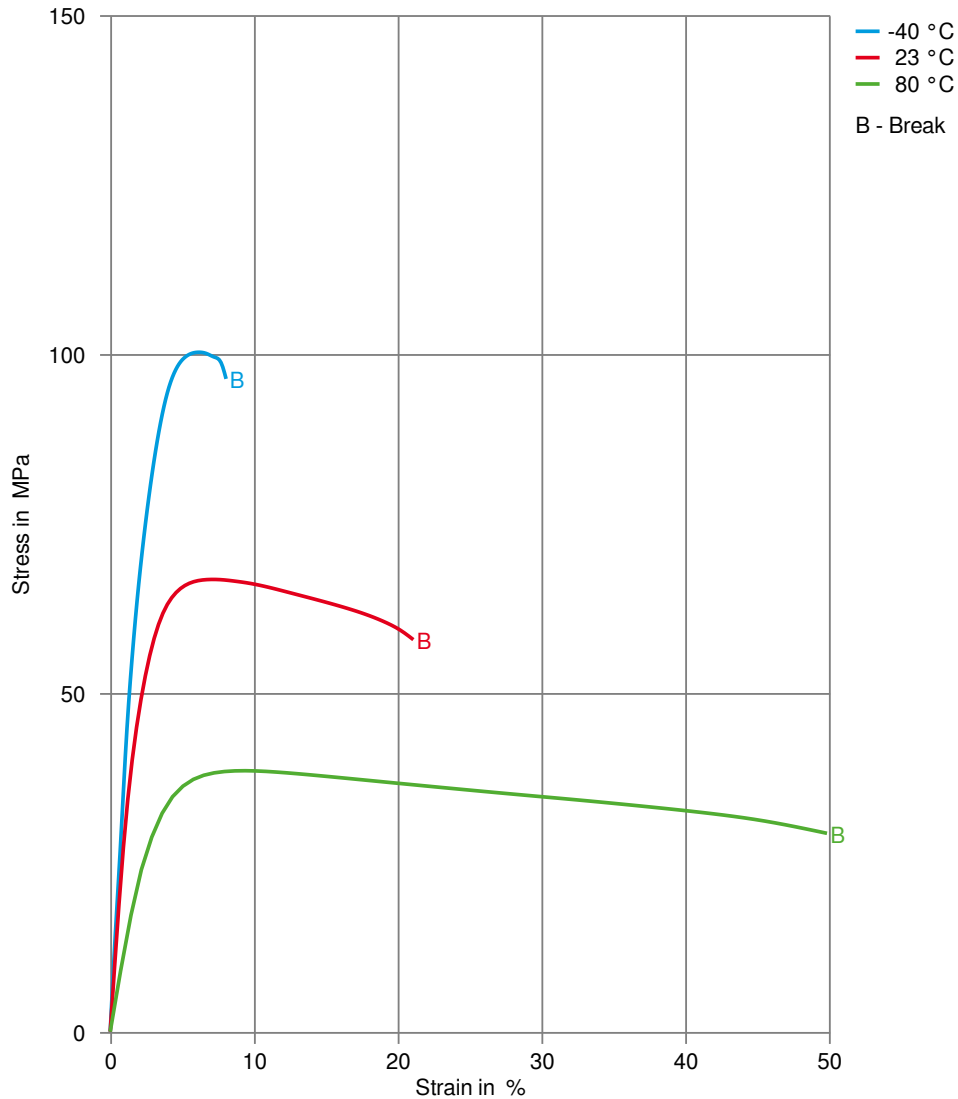


HOSTAFORM® MT® 24U01 ECO-B

Secant modulus-strain

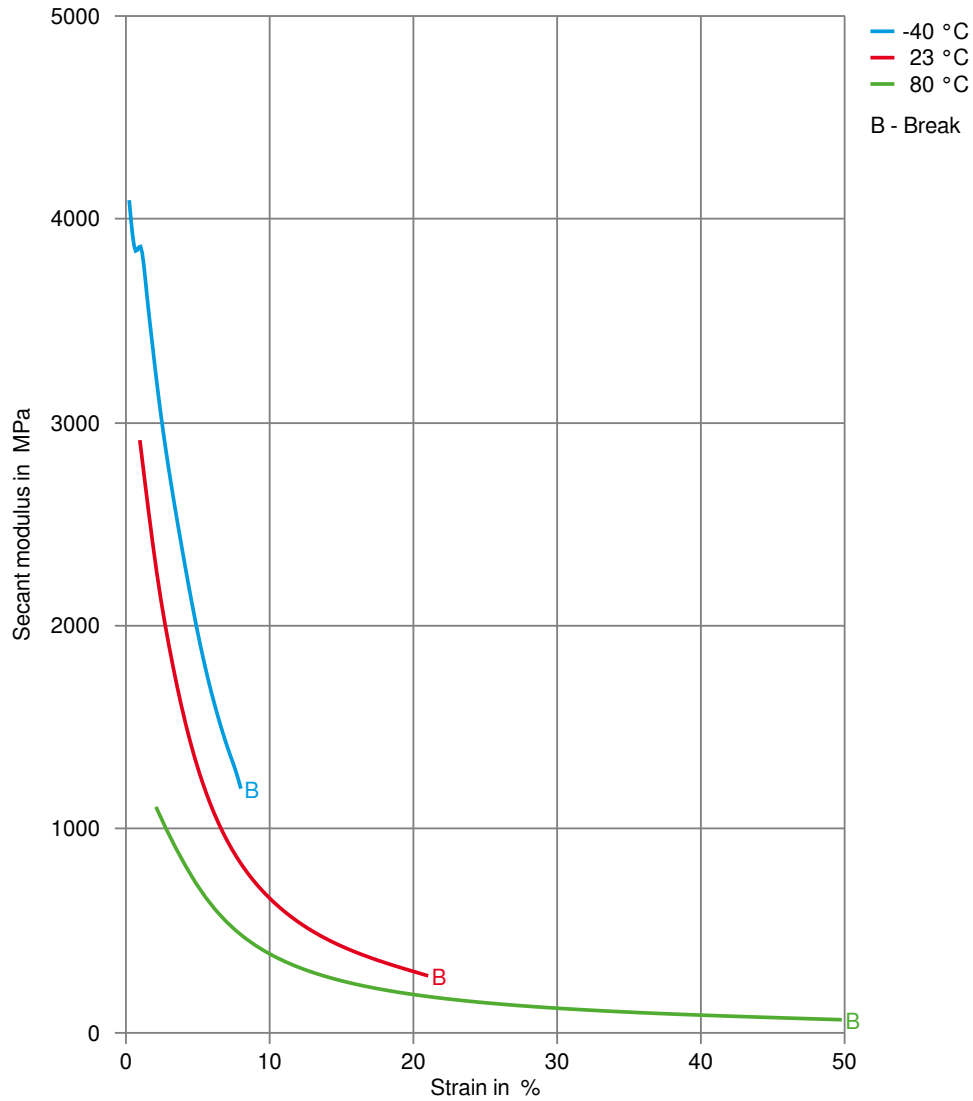

HOSTAFORM® MT® 24U01 ECO-B

True stress-strain

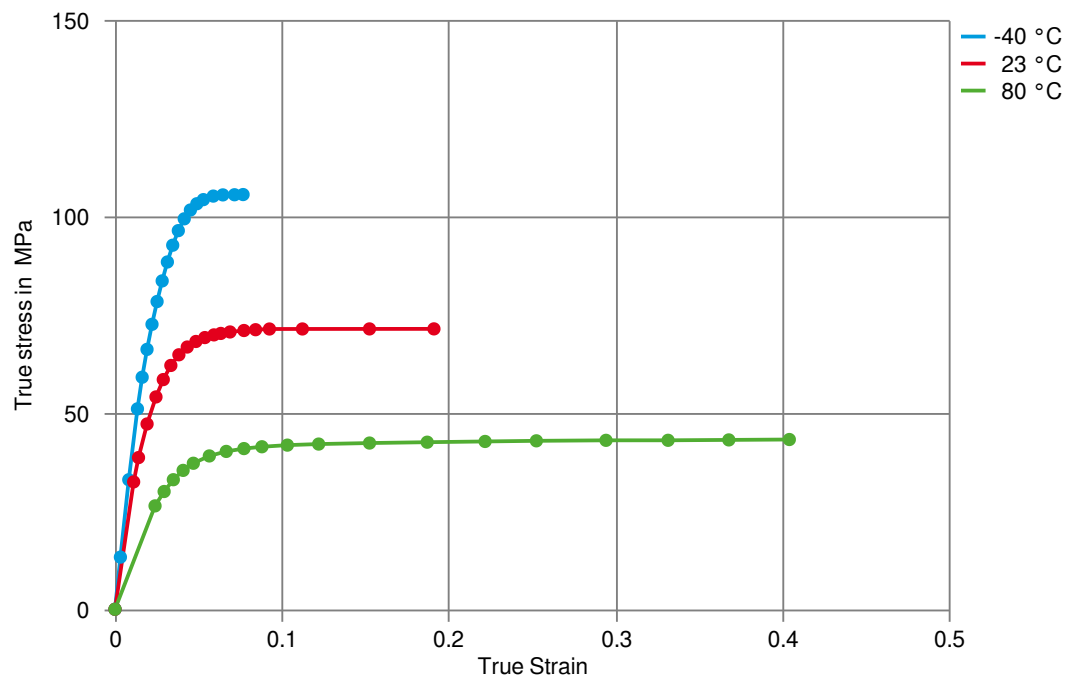

HOSTAFORM® MT® 24U01 ECO-B

Processing Texts

Pre-drying

Drying is not normally required. If material has come in contact with moisture through improper storage or handling, drying may be necessary to prevent splay and odor problems.

