

CELSTRAN® PP-GF20-0453 P10/10

Material code according to ISO 1043-1: PP Polypropylene homopolymer reinforced with 20weight percent long glass fibers. Black. The fibers are chemically coupled to the polypropylene matrix. The pellets are cylindrical and normally as well as the embedded fibers 11 mm long. (-0453 = low emission-grade). Parts molded of CELSTRAN have outstanding mechanical properties such as high strength and stiffness combined with high heat deflection. The notched impact strength is increased at elevated and low temperatures due to the fiber skeleton built in the parts. The long fiber reinforcement reduces creep significantly. The very isotropic shrinkage in the molded parts minimizes the warpage. Complex parts can be manufactured with high reproducibility by injection molding. Application field: Functional/structural parts for automotive

Typical mechanical properties

Tensile Modulus	4400 MPa	ISO 527-1/-2
Stress at break, 5mm/min	85 MPa	ISO 527-1/-2
Strain at break, 5mm/min	2.4 %	ISO 527-1/-2
Flexural Modulus	4900 MPa	ISO 178
Flexural Strength	125 MPa	ISO 178
Charpy impact strength, 23°C	45 kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	24 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	12 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	15 kJ/m ²	ISO 179/1eA

Thermal properties

Melting temperature, 10°C/min	166 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	159 °C	ISO 75-1/-2

Other properties

Density	1030 kg/m ³	ISO 1183
---------	------------------------	----------


Injection

Drying Temperature	90 - 100 °C
Drying Time, Dehumidified Dryer	2 h
Processing Moisture Content	0.2 %
Screw tangential speed	0.1 m/s
Max. mould temperature	30 - 70 °C
Back pressure	3 MPa
Injection speed	slow




CELSTRAN® PP-GF20-0453 P10/10

Stress-strain

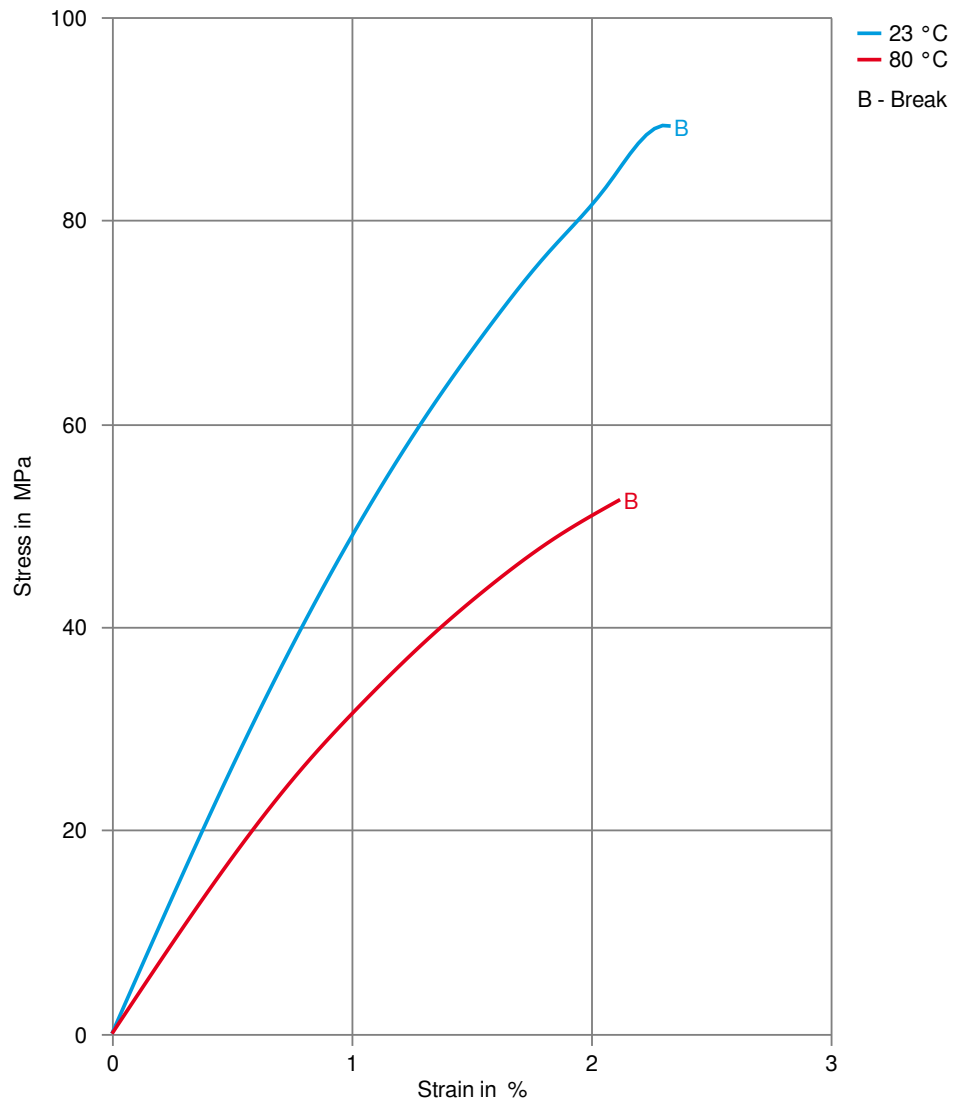

CELSTRAN® PP-GF20-0453 P10/10

Secant modulus-strain

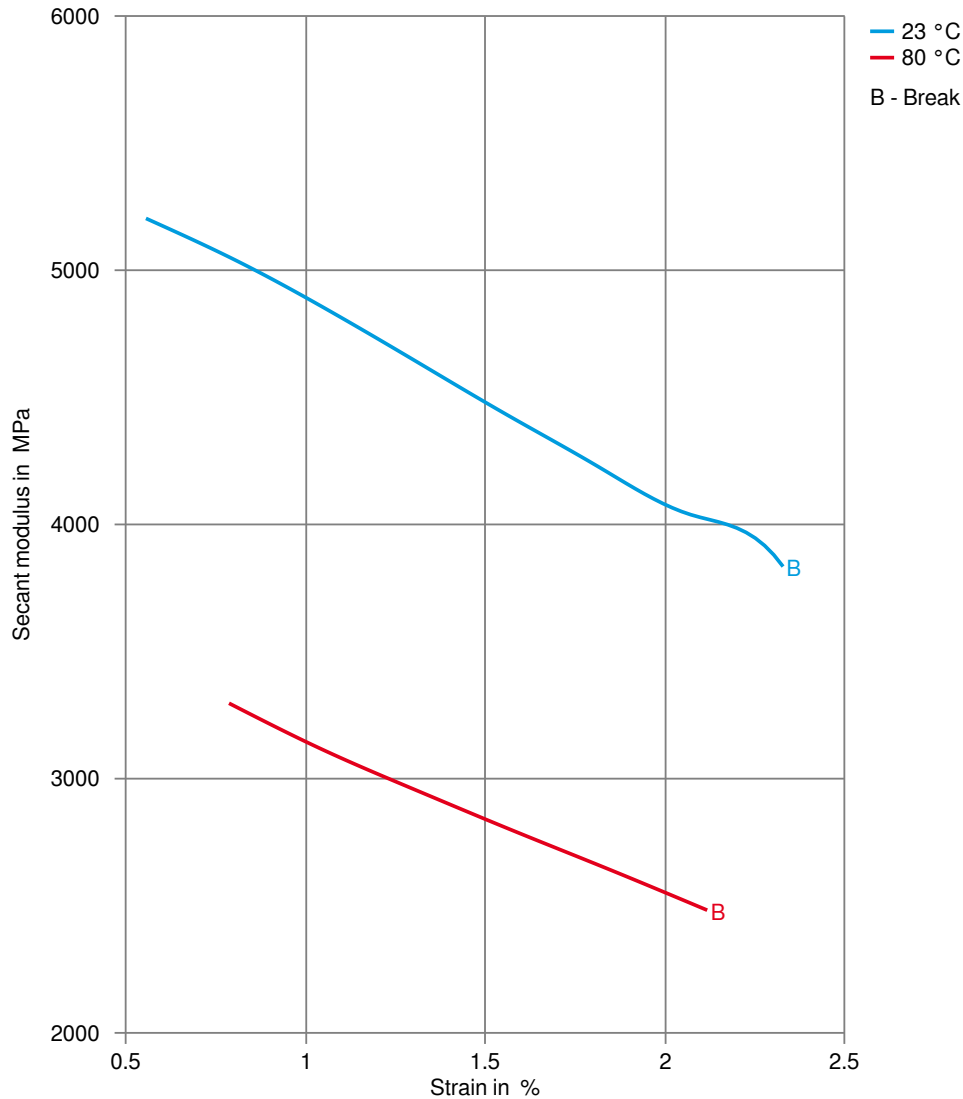

CELSTRAN® PP-GF20-0453 P10/10

Processing Texts

Pre-drying

It is normally not necessary to dry CELSTRAN PP. However, should there be surface moisture (condensate) on the molding compound as a result of incorrect storage, drying is required. A circulating air drying cabinet can be used for this purpose if the gran

Longer pre-drying times/storage

The product can then be stored in standard conditions until processed.

