

POLIFOR® L30 GFFE/1260 H-R NERO X2

Polypropylene, homopolymer, 60% magnetite and 12% glass fiber reinforced, chemically coupled; heat and copper contact stabilised.

Rheological properties

Melt mass-flow rate	11 g/10min	ISO 1133
Melt mass-flow rate, Temperature	230 °C	
Melt mass-flow rate, Load	2.16 kg	

Typical mechanical properties

Tensile Modulus	6400 MPa	ISO 527-1/-2
Stress at break, 5mm/min	52 MPa	ISO 527-1/-2
Strain at break, 5mm/min	2 %	ISO 527-1/-2
Flexural Modulus	6800 MPa	ISO 178
Charpy impact strength, 23°C	21 kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	19 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	5 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	4 kJ/m ²	ISO 179/1eA

Thermal properties

Temp. of deflection under load, 1.8 MPa	125 °C	ISO 75-1/-2
---	--------	-------------

Flammability

Burning Behav. at thickness h	HB class	UL 94
-------------------------------	----------	-------

Other properties

Density	2010 kg/m ³	ISO 1183
---------	------------------------	----------

Injection

Drying Temperature	80 - 100 °C
Drying Time, Dehumidified Dryer	2 - 3 h
Max. mould temperature	50 - 80 °C


Characteristics

Additives	Metal deactivator
-----------	-------------------




POLIFOR® L30 GFFE/1260 H-R NERO X2

Stress-strain

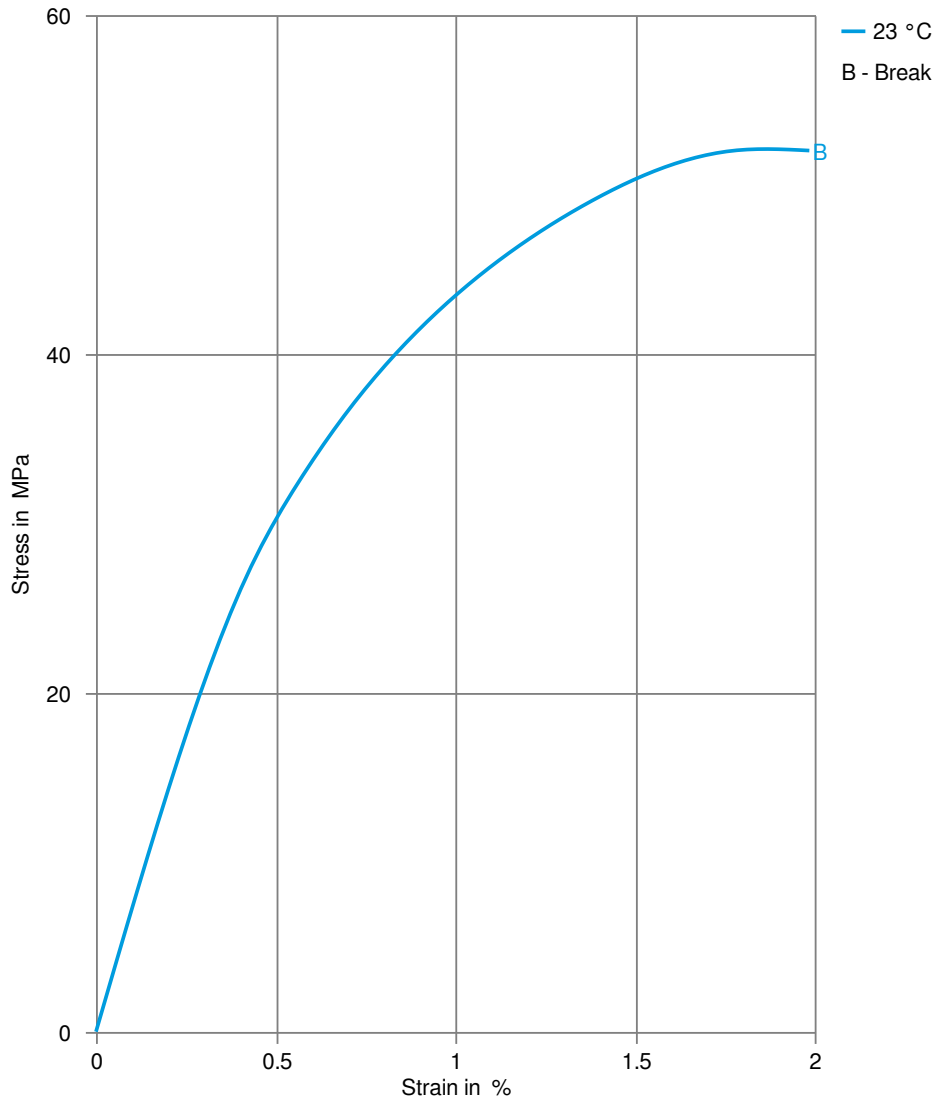

POLIFOR® L30 GFFE/1260 H-R NERO X2

Secant modulus-strain

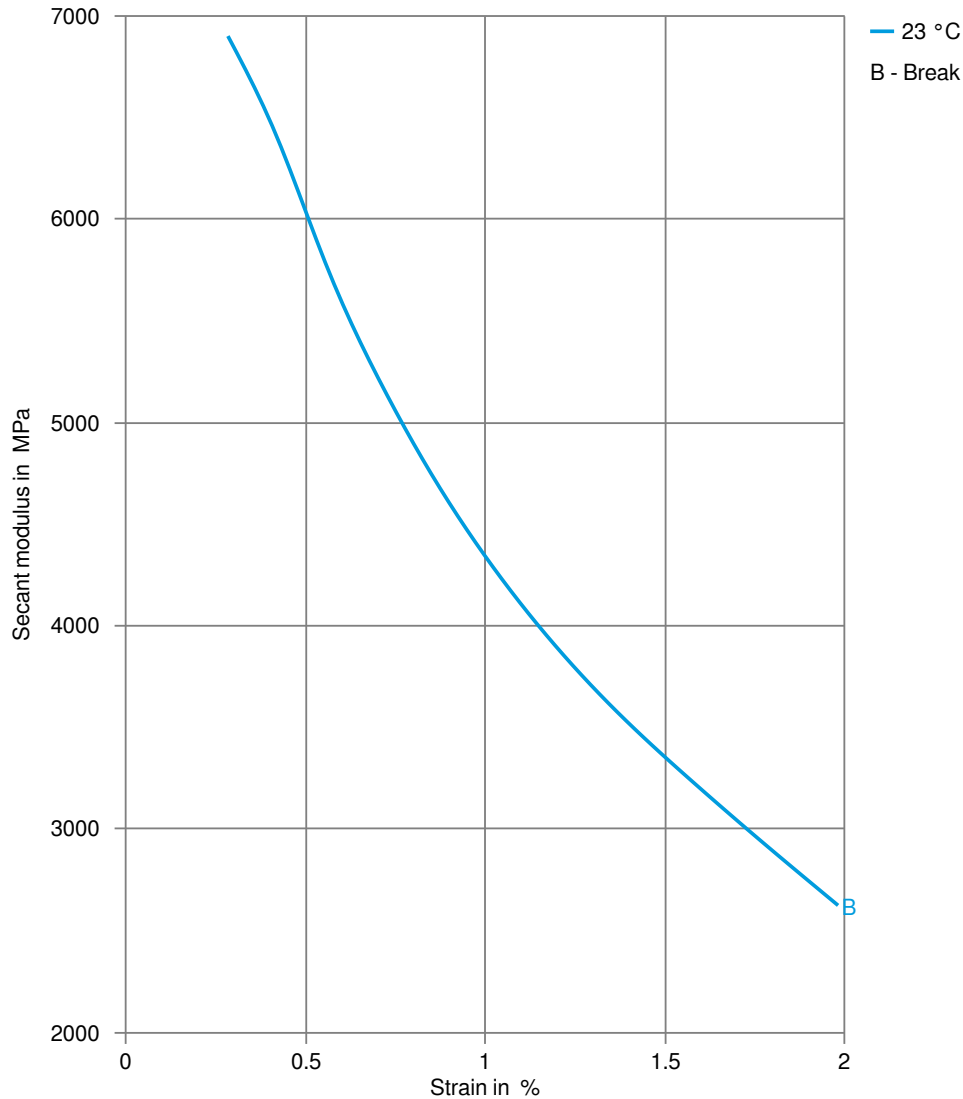

POLIFOR® L30 GFFE/1260 H-R NERO X2

Processing Texts

Longer pre-drying times/storage

This product should be stored in a covered facility and kept away from moisture and heat.

