

TECNOPRENE® VK6T1 3 ECO-R BLACK

Polypropylene, homopolymer, 30% glass fiber reinforced, chemically coupled, high flow, heat stabilized, based partially on recycled PP

Typical mechanical properties

Tensile Modulus	6900 MPa	ISO 527-1/-2
Stress at break, 5mm/min	80 MPa	ISO 527-1/-2
Strain at break, 5mm/min	2.6 %	ISO 527-1/-2
Flexural Modulus	7000 MPa	ISO 178
Flexural Strength	130 MPa	ISO 178
Charpy impact strength, 23°C	40 kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	30 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	8.5 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	6 kJ/m ²	ISO 179/1eA

Thermal properties

Temp. of deflection under load, 1.8 MPa	146 °C	ISO 75-1/-2
---	--------	-------------

Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	UL 94
Burning Behav. at thickness h	HB class	UL 94

Other properties

Density	1130 kg/m ³	ISO 1183
---------	------------------------	----------

Injection

Drying Temperature	80 - 100 °C
Drying Time, Dehumidified Dryer	2 - 3 h
Max. mould temperature	50 - 80 °C


Characteristics

Additives	Contains Recycle
-----------	------------------




TECNOPRENE® VK6T1 3 ECO-R BLACK

Stress-strain

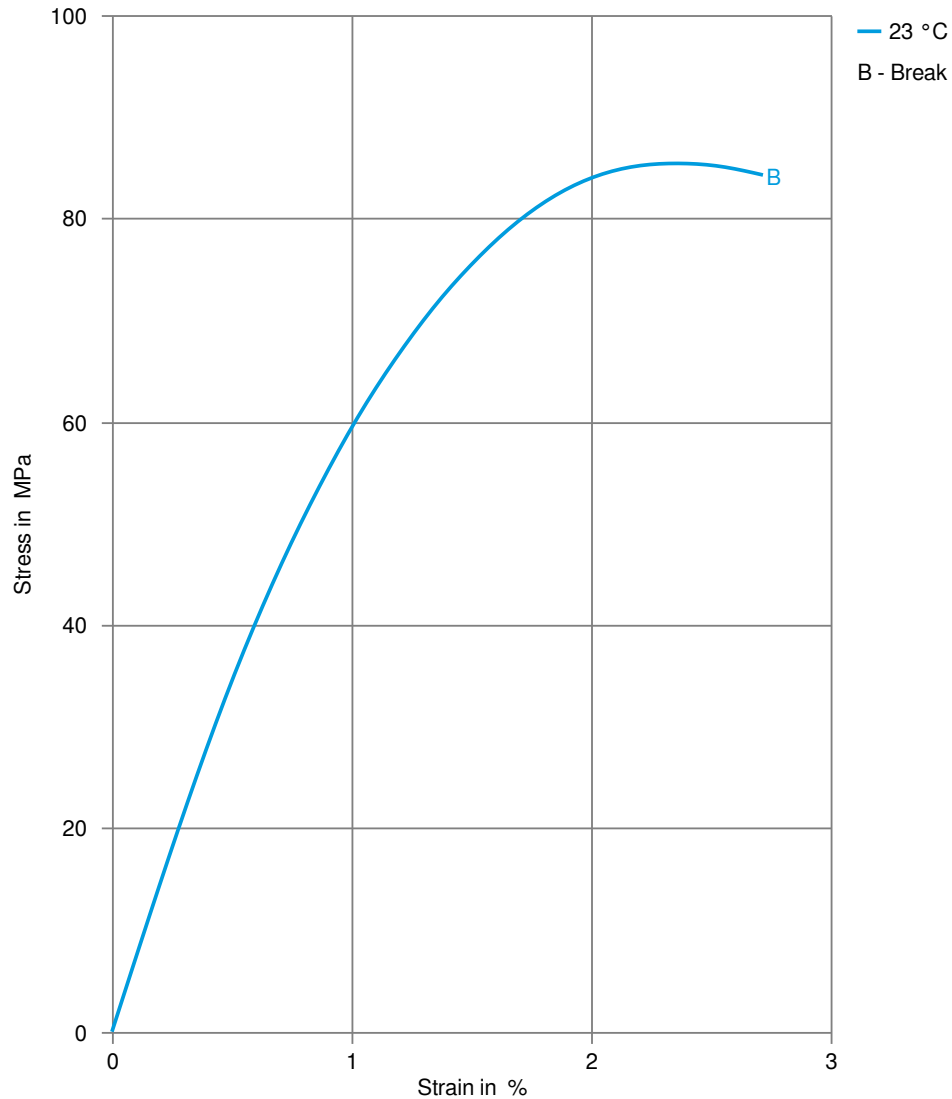

TECNOPRENE® VK6T1 3 ECO-R BLACK

Secant modulus-strain

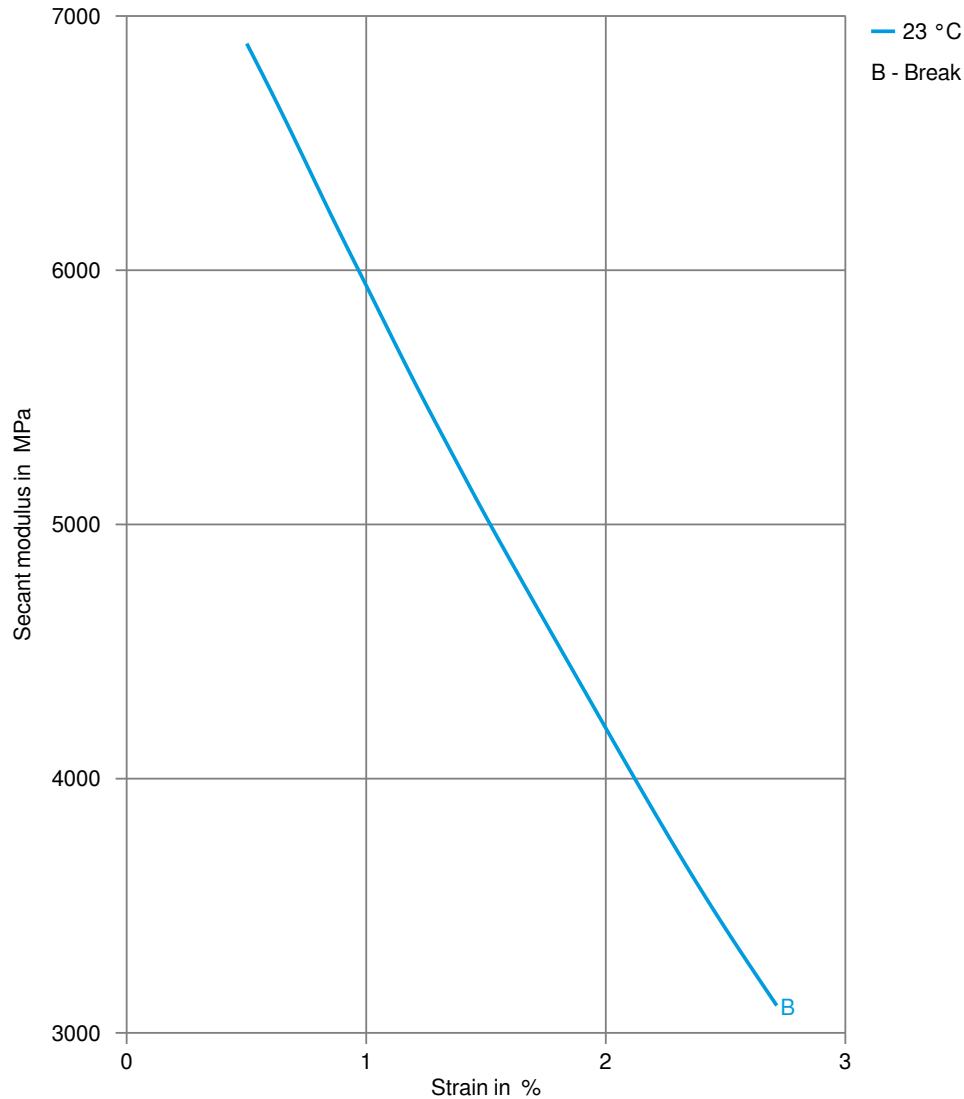

TECNOPRENE® VK6T1 3 ECO-R BLACK

Processing Texts

Longer pre-drying times/storage

This product should be stored in a covered facility and kept away from moisture and heat.

