

Hytrel® HTR8163HVBK

THERMOPLASTIC POLYESTER ELASTOMER

Common features of Hytrel® thermoplastic polyester elastomer include mechanical and physical properties such as exceptional toughness and resilience, high resistance to creep, impact and flex fatigue, flexibility at low temperatures and good retention of properties at elevated temperatures. In addition, it resists many industrial chemicals, oils and solvents. Special grades include heat stabilised, flame retardant, food contact compliant, blow moulding and extrusion grades. Concentrates offered include black pigments, UV protection additives, heat stabilisers, and flame retardants.

Hytrel® thermoplastic polyester elastomer is plasticiser free.

The good melt stability of Hytrel® thermoplastic polyester elastomer normally enables the recycling of properly handled production waste. If recycling is not possible, we recommend, as the preferred option, incineration with energy recovery (-24 kJ/g of base polymer) in appropriately equipped installations.

For disposal, local regulations have to be observed.

Hytrel® thermoplastic polyester elastomer typically is used in demanding applications in the automotive, fluid power, electrical/electronic, consumer goods, appliance and power tool, sporting goods, furniture, industrial and off-road transportation/equipment industry.

Hytrel® HTR8163HVBK is a 65 nom. Shore D, heat stabilised, plasticiser free high performance resin for extrusion; low temperature impact, excellent heat ageing, fatigue and crack propagation resistance; for air brake tubes.

Product information

Resin Identification	TPC-ET	ISO 1043
Part Marking Code	>TPC-ET<	ISO 11469

Rheological properties

Melt volume-flow rate	5 cm ³ /10min	ISO 1133
Melt mass-flow rate	5 g/10min	ISO 1133
Temperature	230 °C	
Load	2.16 kg	
Melt mass-flow rate, Temperature	230 °C	
Melt mass-flow rate, Load	2.16 kg	
Moulding shrinkage, parallel	1.9 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.8 %	ISO 294-4, 2577

Typical mechanical properties

Tensile Modulus	340 MPa	ISO 527-1/-2
Yield stress	21 MPa	ISO 527-1/-2
Yield strain	30 %	ISO 527-1/-2
Stress at 5% strain	12 MPa	ISO 527-1/-2
Stress at 10% strain	17.5 MPa	ISO 527-1/-2
Stress at 50% strain	21 MPa	ISO 527-1/-2
Stress at 100% strain	23 MPa	ISO 527-1/-2
Stress at 300% strain	32 MPa	ISO 527-1/-2
Stress at break	44 MPa	ISO 527-1/-2
Nominal strain at break	480 %	ISO 527-1/-2
Strain at break	>300 %	ISO 527-1/-2



Hytrel® HTR8163HVBK

THERMOPLASTIC POLYESTER ELASTOMER

Flexural Modulus	350 MPa	ISO 178
Tensile creep modulus, 1h	310 MPa	ISO 899-1
Tensile creep modulus, 1000h	260 MPa	ISO 899-1
Charpy notched impact strength, 23°C	130 ^[P] kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	12 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -40°C	8.5 kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	N kJ/m ²	ISO 180/1A
Izod notched impact strength, -40°C	7.5 kJ/m ²	ISO 180/1A
Poisson's ratio	0.48	
Brittleness temperature	-70 °C	ISO 974
Shore D hardness, 15s	60	ISO 48-4 / ISO 868
Shore D hardness, max	64	ISO 868
Tear strength, parallel	200 kN/m	ISO 34-1
Tear strength, normal	180 kN/m	ISO 34-1
Abrasion resistance	110 mm ³	ISO 4649

[P]: Partial Break

Thermal properties

Melting temperature, 10°C/min	210 °C	ISO 11357-1/-3
Temp. of deflection under load, 0.45 MPa	85 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 10N	200 °C	ISO 306
Coeff. of linear therm. expansion, parallel	220 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	170 E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.16 W/(m K)	Internal
Spec. heat capacity of melt	2090 J/(kg K)	Internal

Flammability

FMVSS Class	SE/B	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	17 mm/min	ISO 3795 (FMVSS 302)

Other properties

Density	1230 kg/m ³	ISO 1183
Density of melt	1060 kg/m ³	Internal

Injection

Drying Recommended	yes	
Drying Temperature	110 °C	
Drying Time, Dehumidified Dryer	2 - 4 h	
Processing Moisture Content	≤0.08 %	
Melt Temperature Optimum	240 °C	Internal
Min. melt temperature	230 °C	
Max. melt temperature	260 °C	
Mold Temperature Optimum	45 °C	



Hytrel® HTR8163HVBK

THERMOPLASTIC POLYESTER ELASTOMER

Min. mould temperature	45 °C
Max. mould temperature	55 °C

Extrusion

Drying Temperature	100 - 120 °C
Drying Time, Dehumidified Dryer	3 - 4 h
Processing Moisture Content	≤0.06 %
Melt Temperature Optimum	230 °C
Melt Temperature Range	225 - 240 °C

Additional information


Profile extrusion	Allows higher extrusion speed than HTR8620
-------------------	--



Hytrel® HTR8163HVBK

THERMOPLASTIC POLYESTER ELASTOMER


Viscosity-shear rate

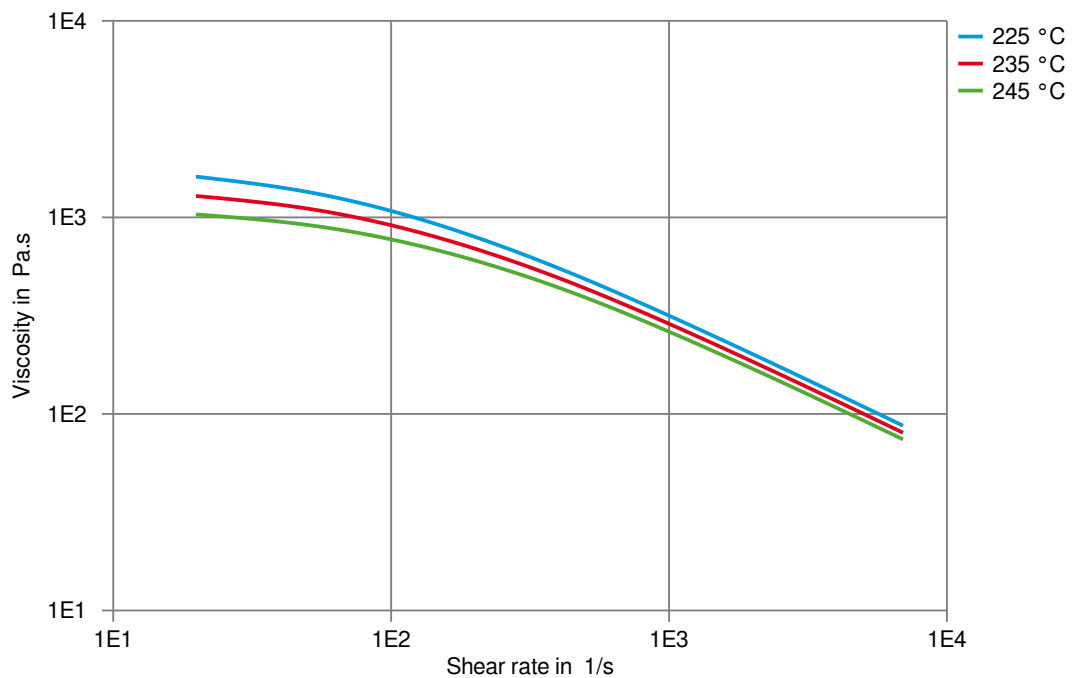

Hytrel® HTR8163HVBK

THERMOPLASTIC POLYESTER ELASTOMER


Shearstress-shear rate

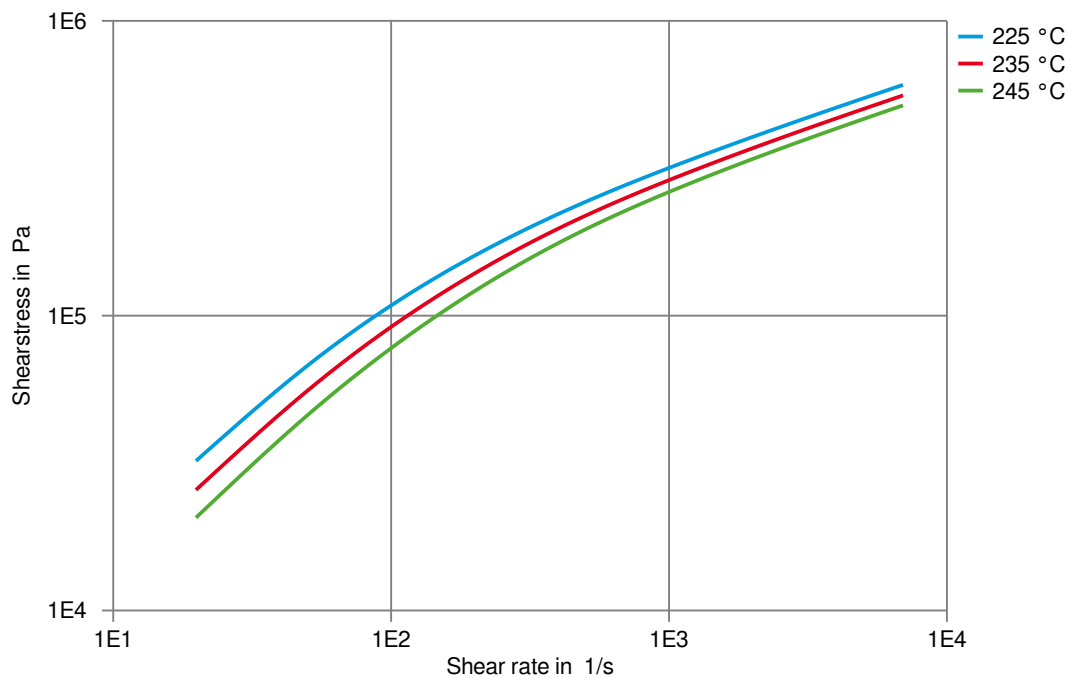

Hytrel® HTR8163HVBK

THERMOPLASTIC POLYESTER ELASTOMER


Specific volume-temperature (pvT)

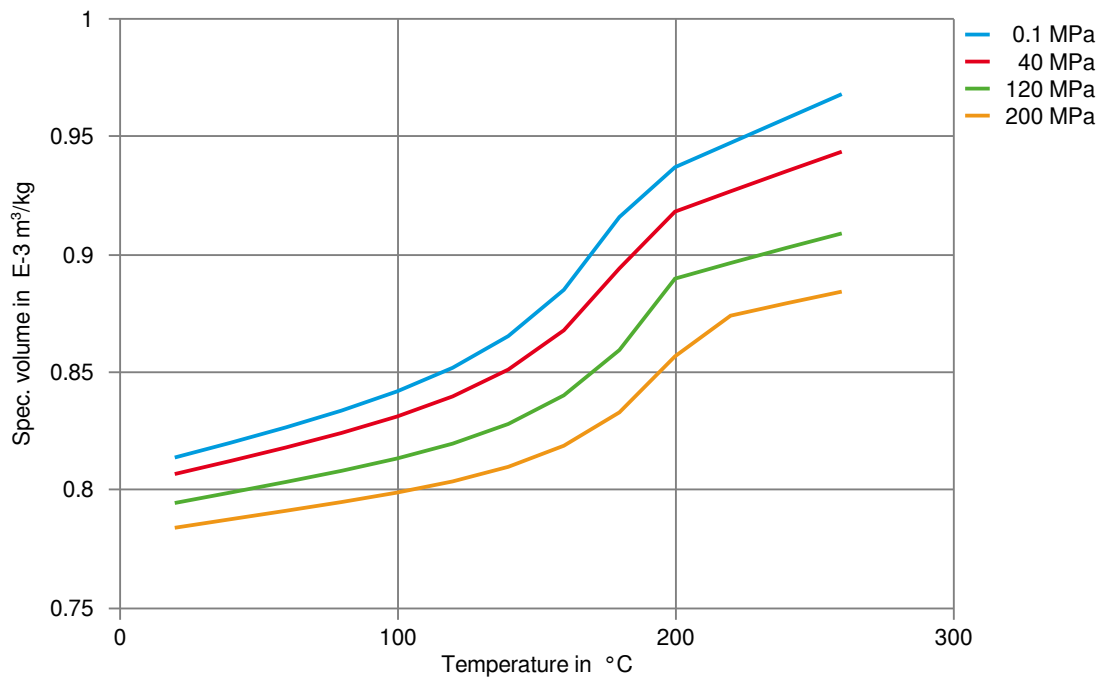

Hytrel® HTR8163HVBK

THERMOPLASTIC POLYESTER ELASTOMER

Stress-Strain (Flexible Materials)

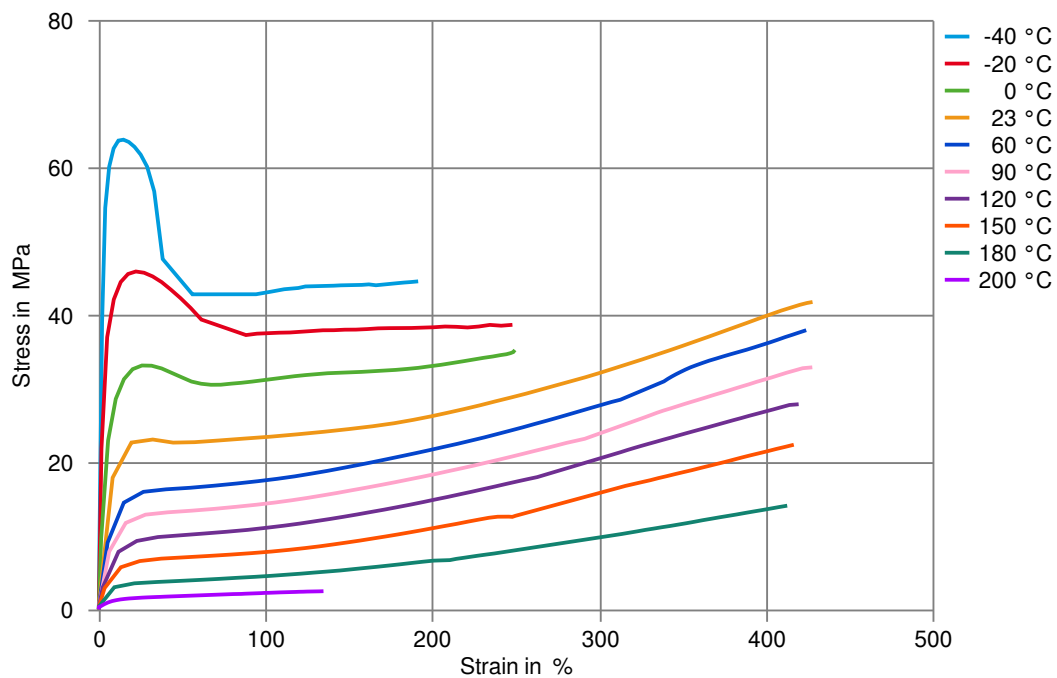

Hytrel® HTR8163HVBK

THERMOPLASTIC POLYESTER ELASTOMER

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass), 23°C
- ✓ Citric Acid solution (10% by mass), 23°C
- ✓ Lactic Acid (10% by mass), 23°C
- ✗ Hydrochloric Acid (36% by mass), 23°C
- ✗ Nitric Acid (40% by mass), 23°C
- ✗ Sulfuric Acid (38% by mass), 23°C
- ✓ Sulfuric Acid (5% by mass), 23°C
- ✗ Chromic Acid solution (40% by mass), 23°C

Bases

- ✓ Sodium Hydroxide solution (35% by mass), 23°C
- ✓ Sodium Hydroxide solution (1% by mass), 23°C
- ✓ Ammonium Hydroxide solution (10% by mass), 23°C

Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✓ Ethanol, 23°C

Hydrocarbons

- ✓ n-Hexane, 23°C
- ✓ Toluene, 23°C
- ✓ iso-Octane, 23°C

Ketones

- ✗ Acetone, 23°C

Ethers

- ✗ Diethyl ether, 23°C

Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23°C
- ✗ SAE 10W40 multigrade motor oil, 130°C
- ✗ SAE 80/90 hypoid-gear oil, 130°C
- ✓ Insulating Oil, 23°C

Standard Fuels

- ✗ ISO 1817 Liquid 1 - E5, 60°C
- ✗ ISO 1817 Liquid 2 - M15E4, 60°C
- ✗ ISO 1817 Liquid 3 - M3E7, 60°C
- ✗ ISO 1817 Liquid 4 - M15, 60°C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 90°C
- ✗ Diesel fuel (pref. ISO 1817 Liquid F), >90°C



Hytrel® HTR8163HVBK

THERMOPLASTIC POLYESTER ELASTOMER

Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C
- ✓ Sodium Carbonate solution (20% by mass), 23°C
- ✓ Sodium Carbonate solution (2% by mass), 23°C
- ✓ Zinc Chloride solution (50% by mass), 23°C

Other

- ✓ Ethyl Acetate, 23°C
- ✗ Hydrogen peroxide, 23°C
- ✗ DOT No. 4 Brake fluid, 130°C
- ✗ Ethylene Glycol (50% by mass) in water, 108°C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23°C
- ✓ 50% Oleic acid + 50% Olive Oil, 23°C
- ✓ Water, 23°C
- ✗ Water, 90°C
- ✓ Phenol solution (5% by mass), 23°C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

