



CYCOLOY™ Resin CX7211

Americas: COMMERCIAL

CYCOLOY CX7211 PC/ABS resin is a non-filled, injection moldable grade which has UL 94 rating at 2.5 mm 5VA. CYCOLOY CX7211 resin provides all color options and features an excellent balance of flow, impact and heat properties, which makes it an excellent candidate for thin wall applications.

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
MECHANICAL			
Tensile Stress, yld, Type I, 50 mm/min	670	kgf/cm ²	ASTM D 638
Tensile Stress, brk, Type I, 50 mm/min	610	kgf/cm ²	ASTM D 638
Tensile Strain, yld, Type I, 50 mm/min	4	%	ASTM D 638
Tensile Strain, brk, Type I, 50 mm/min	98	%	ASTM D 638
Tensile Modulus, 5 mm/min	30000	kgf/cm ²	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	1050	kgf/cm ²	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	28000	kgf/cm ²	ASTM D 790
Tensile Stress, yield, 50 mm/min	62	MPa	ISO 527
Tensile Stress, break, 50 mm/min	55	MPa	ISO 527
Tensile Strain, yield, 50 mm/min	4	%	ISO 527
Tensile Strain, break, 50 mm/min	90	%	ISO 527
Tensile Modulus, 1 mm/min	2800	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	100	MPa	ISO 178
Flexural Modulus, 2 mm/min	2500	MPa	ISO 178
IMPACT			
Izod Impact, notched, 23°C	63	cm-kgf/cm	ASTM D 256
Izod Impact, notched, -30°C	12	cm-kgf/cm	ASTM D 256
Instrumented Impact Total Energy, 23°C	611	cm-kgf	ASTM D 3763
Izod Impact, notched 80*10*3 +23°C	40	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*3 -30°C	10	kJ/m ²	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*3 sp=62mm	40	kJ/m ²	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*3 sp=62mm	10	kJ/m ²	ISO 179/1eA



CYCOLOY™ Resin CX7211

Americas: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
THERMAL			
Vicat Softening Temp, Rate B/50	105	°C	ASTM D 1525
HDT, 0.45 MPa, 3.2 mm, unannealed	94	°C	ASTM D 648
HDT, 1.82 MPa, 3.2mm, unannealed	89	°C	ASTM D 648
HDT, 0.45 MPa, 6.4 mm, unannealed	102	°C	ASTM D 648
HDT, 1.82 MPa, 6.4 mm, unannealed	96	°C	ASTM D 648
CTE, -40°C to 40°C, flow	6.14E-05	1/°C	ASTM E 831
CTE, -40°C to 40°C, xflow	5.51E-05	1/°C	ASTM E 831
Thermal Conductivity	0.2	W/m-°C	ISO 8302
CTE, -40°C to 40°C, flow	7.5E-05	1/°C	ISO 11359-2
CTE, -40°C to 40°C, xflow	7.5E-05	1/°C	ISO 11359-2
Ball Pressure Test, 75°C +/- 2°C	Pass	-	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	105	°C	ISO 306
Vicat Softening Temp, Rate B/120	105	°C	ISO 306
HDT/Af, 1.8 MPa Flatw 80*10*4 sp=64mm	90	°C	ISO 75/Af
Relative Temp Index, Elec	90	°C	UL 746B
Relative Temp Index, Mech w/impact	90	°C	UL 746B
Relative Temp Index, Mech w/o impact	90	°C	UL 746B
PHYSICAL			
Specific Gravity	1.18	-	ASTM D 792
Mold Shrinkage, flow, 3.2 mm (5)	0.4 - 0.6	%	SABIC Method
Melt Flow Rate, 260°C/2.16 kgf	15.5	g/10 min	ASTM D 1238
Density	1.19	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	0.24	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.12	%	ISO 62





CYCOLOY™ Resin CX7211

Americas: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
PHYSICAL			
Melt Volume Rate, MVR at 260°C/2.16 kg	14	cm ³ /10 min	ISO 1133
ELECTRICAL			
Hot Wire Ignition {PLC}	2	PLC Code	UL 746A
High Ampere Arc Ign, surface {PLC}	0	PLC Code	UL 746A
Comparative Tracking Index (UL) {PLC}	3	PLC Code	UL 746A
Volume Resistivity	>1.E+15	Ohm-cm	IEC 60093
Surface Resistivity, ROA	>1.E+15	Ohm	IEC 60093
Dielectric Strength, in oil, 0.8 mm	35	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 1.6 mm	25	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 3.2 mm	17	kV/mm	IEC 60243-1
FLAME CHARACTERISTICS			
UL Recognized, 94V-1 Flame Class Rating (3)	1.25	mm	UL 94
UL Recognized, 94V-0 Flame Class Rating (3)	1.5	mm	UL 94
UL Recognized, 94-5VA Rating (3)	2.5	mm	UL 94
UL Recognized, 94-5VB Rating (3)	2	mm	UL 94
Glow Wire Flammability Index 960°C, passes at	1	mm	IEC 60695-2-12
Glow Wire Ignitability Temperature, 1.0 mm	800	°C	IEC 60695-2-13
Glow Wire Ignitability Temperature, 3.0 mm	800	°C	IEC 60695-2-13
Oxygen Index (LOI)	32	%	ISO 4589





CYCOLOY™ Resin CX7211

Americas: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	Unit
Injection Molding		
Drying Temperature	80 - 90	°C
Drying Time	3 - 4	hrs
Drying Time (Cumulative)	8	hrs
Maximum Moisture Content	0.04	%
Melt Temperature	245 - 275	°C
Nozzle Temperature	245 - 275	°C
Front - Zone 3 Temperature	245 - 275	°C
Middle - Zone 2 Temperature	220 - 265	°C
Rear - Zone 1 Temperature	220 - 255	°C
Mold Temperature	60 - 80	°C
Back Pressure	0.3 - 0.7	MPa
Screw Speed	40 - 70	rpm
Shot to Cylinder Size	30 - 80	%
Vent Depth	0.038 - 0.076	mm



CYCOLOY™ Resin CX7211

Americas: COMMERCIAL


CALCULATED FLOW LENGTH INDICATION

Moldflow® Radial Flow Analysis

CYCOLOY® CX7211

Melt Temperature : 260°C

Mold Temperature : 70°C

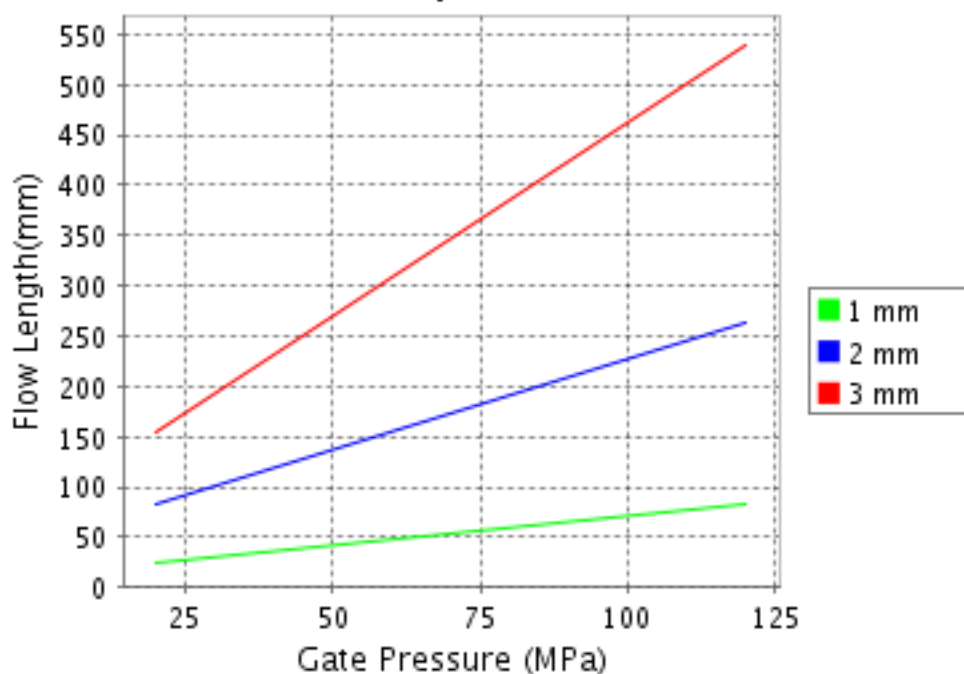

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

© Moldflow is a registered trademark of the Moldflow Corporation.

