



CYCOLOY™ Resin CX7240

Americas: COMMERCIAL

CYCOLOY CX7240 resin is an injection moldable PC/ABS blend. It contains non-brominated and non-chlorinated flame retardant systems to meet UL-94 V0 at 0.75mm, V1 at 0.6mm, V2 at 0.2mm and 5VB at 1.5mm respectively. Excellent flow and impact balance together with the thin wall flame resistance and all color options make CYCOLOY CX7240 an ideal candidate for a wide variety of thin wall applications.

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
MECHANICAL			
Tensile Stress, yld, Type I, 50 mm/min	660	kgf/cm ²	ASTM D 638
Tensile Stress, brk, Type I, 50 mm/min	590	kgf/cm ²	ASTM D 638
Tensile Strain, yld, Type I, 50 mm/min	4.1	%	ASTM D 638
Tensile Strain, brk, Type I, 50 mm/min	100	%	ASTM D 638
Tensile Modulus, 5 mm/min	26500	kgf/cm ²	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	1060	kgf/cm ²	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	25400	kgf/cm ²	ASTM D 790
Tensile Stress, yield, 50 mm/min	65	MPa	ISO 527
Tensile Stress, break, 50 mm/min	50	MPa	ISO 527
Tensile Strain, yield, 50 mm/min	4	%	ISO 527
Tensile Strain, break, 50 mm/min	90	%	ISO 527
Tensile Modulus, 1 mm/min	2600	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	96	MPa	ISO 178
Flexural Modulus, 2 mm/min	2500	MPa	ISO 178
IMPACT			
Izod Impact, notched, 23°C	71	cm-kgf/cm	ASTM D 256
Izod Impact, notched, -30°C	17	cm-kgf/cm	ASTM D 256
Instrumented Impact Total Energy, 23°C	662	cm-kgf	ASTM D 3763
Izod Impact, notched 80*10*3 +23°C	20	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*3 -30°C	10	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*4 +23°C	25	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*4 -30°C	10	kJ/m ²	ISO 180/1A





CYCOLOY™ Resin CX7240

Americas: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
IMPACT			
Charpy 23°C, V-notch Edgew 80*10*3 sp=62mm	20	kJ/m ²	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*3 sp=62mm	10	kJ/m ²	ISO 179/1eA
Charpy 23°C, V-notch Edgew 80*10*4 sp=62mm	22	kJ/m ²	ISO 179/1eA
THERMAL			
Vicat Softening Temp, Rate B/50	110	°C	ASTM D 1525
HDT, 0.45 MPa, 3.2 mm, unannealed	100	°C	ASTM D 648
HDT, 1.82 MPa, 3.2mm, unannealed	89	°C	ASTM D 648
HDT, 1.82 MPa, 6.4 mm, unannealed	99	°C	ASTM D 648
CTE, -40°C to 40°C, flow	7.5E-05	1/°C	ASTM E 831
CTE, -40°C to 40°C, xflow	7.5E-05	1/°C	ASTM E 831
Thermal Conductivity	0.2	W/m-°C	ISO 8302
CTE, -40°C to 40°C, flow	7.5E-05	1/°C	ISO 11359-2
CTE, -40°C to 40°C, xflow	7.5E-05	1/°C	ISO 11359-2
Ball Pressure Test, 75°C +/- 2°C	Pass	-	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	110	°C	ISO 306
Vicat Softening Temp, Rate B/120	113	°C	ISO 306
HDT/Af, 1.8 MPa Flatw 80*10*4 sp=64mm	93	°C	ISO 75/Af
Relative Temp Index, Elec	90	°C	UL 746B
Relative Temp Index, Mech w/impact	90	°C	UL 746B
Relative Temp Index, Mech w/o impact	90	°C	UL 746B
PHYSICAL			
Specific Gravity	1.19	-	ASTM D 792
Mold Shrinkage, flow, 3.2 mm (5)	0.4 - 0.6	%	SABIC Method
Melt Flow Rate, 260°C/2.16 kgf	18	g/10 min	ASTM D 1238
Density	1.2	g/cm ³	ISO 1183





CYCOLOY™ Resin CX7240

Americas: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
PHYSICAL			
Water Absorption, (23°C/sat)	0.2	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.1	%	ISO 62
Melt Volume Rate, MVR at 260°C/2.16 kg	15	cm ³ /10 min	ISO 1133
ELECTRICAL			
Hot Wire Ignition {PLC}	3	PLC Code	UL 746A
High Ampere Arc Ign, surface {PLC}	0	PLC Code	UL 746A
Comparative Tracking Index (UL) {PLC}	3	PLC Code	UL 746A
Volume Resistivity	>1.E+15	Ohm-cm	IEC 60093
Surface Resistivity, ROA	>1.E+15	Ohm	IEC 60093
Dielectric Strength, in oil, 0.8 mm	35	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 1.6 mm	25	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 3.2 mm	17	kV/mm	IEC 60243-1
FLAME CHARACTERISTICS			
UL Recognized, 94V-1 Flame Class Rating (3)	0.6	mm	UL 94
UL Recognized, 94V-0 Flame Class Rating (3)	0.75	mm	UL 94
UL Recognized, 94-5VA Rating (3)	3	mm	UL 94
UL Recognized, 94-5VB Rating (3)	1.5	mm	UL 94
Glow Wire Flammability Index 960°C, passes at	0.75	mm	IEC 60695-2-12
Glow Wire Flammability Index 960°C, passes at, by VDE	0.75	mm	IEC 60695-2-12
Glow Wire Ignitability Temperature, 0.75 mm, by VDE	775	°C	IEC 60695-2-13
Glow Wire Ignitability Temperature, 1.0 mm	825	°C	IEC 60695-2-13
Glow Wire Ignitability Temperature, 1.5 mm, by VDE	775	°C	IEC 60695-2-13
Glow Wire Ignitability Temperature, 3.0 mm	800	°C	IEC 60695-2-13
Glow Wire Ignitability Temperature, 3.0 mm, by VDE	775	°C	IEC 60695-2-13
Oxygen Index (LOI)	34	%	ISO 4589





CYCOLOY™ Resin CX7240

Americas: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	Unit
Injection Molding		
Drying Temperature	80 - 90	°C
Drying Time	2 - 4	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	250 - 300	°C
Nozzle Temperature	250 - 300	°C
Front - Zone 3 Temperature	250 - 300	°C
Middle - Zone 2 Temperature	240 - 290	°C
Rear - Zone 1 Temperature	230 - 280	°C
Hopper Temperature	60 - 80	°C
Mold Temperature	60 - 85	°C
Vent Depth	0.03 - 0.075	mm



CYCOLOY™ Resin CX7240

Americas: COMMERCIAL


CALCULATED FLOW LENGTH INDICATION

Moldflow® Radial Flow Analysis

CYCOLOY® CX7240

Melt Temperature : 285°C

Mold Temperature : 75°C

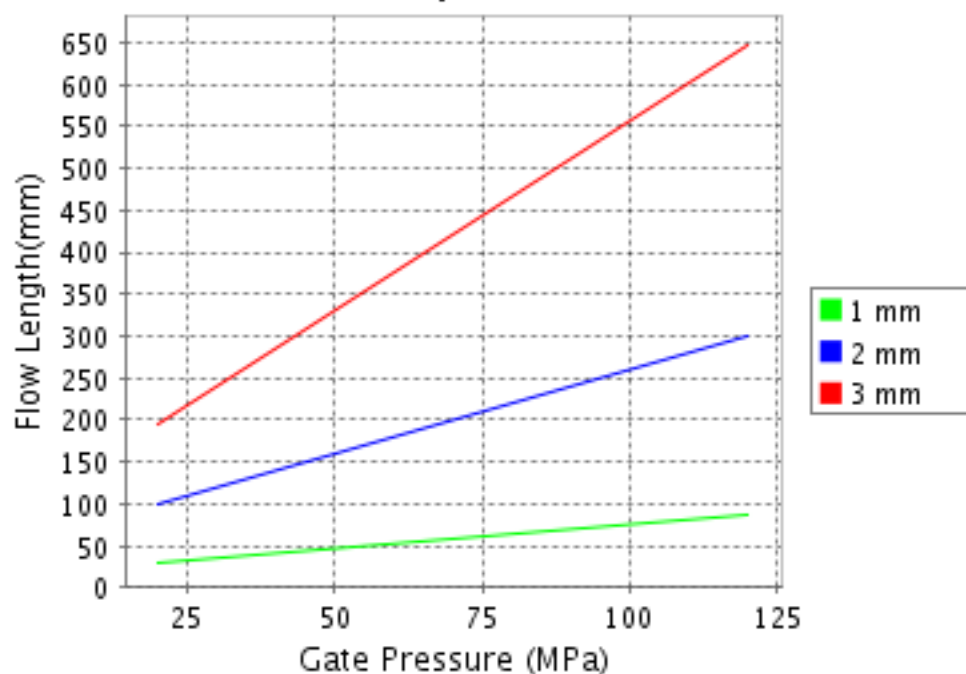

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

© Moldflow is a registered trademark of the Moldflow Corporation.

