



CYCOLOY™ Resin XCM830

Americas: COMMERCIAL

PC/ABS with high stiffness and impact performance

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
MECHANICAL			
Tensile Stress, yld, Type I, 5 mm/min	610	kgf/cm ²	ASTM D 638
Tensile Stress, brk, Type I, 5 mm/min	560	kgf/cm ²	ASTM D 638
Tensile Strain, yld, Type I, 5 mm/min	5	%	ASTM D 638
Tensile Strain, brk, Type I, 5 mm/min	100	%	ASTM D 638
Tensile Modulus, 5 mm/min	34600	kgf/cm ²	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	960	kgf/cm ²	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	31600	kgf/cm ²	ASTM D 790
Tensile Stress, yield, 5 mm/min	56	MPa	ISO 527
Tensile Stress, break, 5 mm/min	55	MPa	ISO 527
Tensile Strain, yield, 5 mm/min	5	%	ISO 527
Tensile Strain, break, 5 mm/min	100	%	ISO 527
Tensile Modulus, 1 mm/min	3100	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	95	MPa	ISO 178
Flexural Modulus, 2 mm/min	3100	MPa	ISO 178
IMPACT			
Izod Impact, notched, 23°C	50	cm-kgf/cm	ASTM D 256
Izod Impact, notched, -30°C	12	cm-kgf/cm	ASTM D 256
Instrumented Impact Total Energy, 23°C	662	cm-kgf	ASTM D 3763
Izod Impact, notched 80*10*3 +23°C	45	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*3 -30°C	10	kJ/m ²	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*3 sp=62mm	45	kJ/m ²	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*3 sp=62mm	10	kJ/m ²	ISO 179/1eA





CYCOLOY™ Resin XCM830

Americas: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
THERMAL			
Vicat Softening Temp, Rate B/50	138	°C	ASTM D 1525
HDT, 1.82 MPa, 3.2mm, unannealed	118	°C	ASTM D 648
CTE, -40°C to 40°C, flow	6.E-05	1/°C	ASTM E 831
CTE, -40°C to 40°C, xflow	7.E-05	1/°C	ASTM E 831
Thermal Conductivity	0.2	W/m-°C	ISO 8302
CTE, -40°C to 40°C, flow	6.E-05	1/°C	ISO 11359-2
CTE, -40°C to 40°C, xflow	7.E-05	1/°C	ISO 11359-2
Ball Pressure Test, 125°C +/- 2°C	PASSES	-	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	138	°C	ISO 306
Vicat Softening Temp, Rate B/120	140	°C	ISO 306
HDT/Af, 1.8 MPa Flatw 80*10*4 sp=64mm	118	°C	ISO 75/Af
PHYSICAL			
Specific Gravity	1.22	-	ASTM D 792
Mold Shrinkage, flow, 3.2 mm (5)	0.7 - 0.8	%	SABIC Method
Melt Flow Rate, 260°C/5.0 kgf	11	g/10 min	ASTM D 1238
Density	1.22	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	0.4	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.1	%	ISO 62
Melt Volume Rate, MVR at 260°C/5.0 kg	9	cm ³ /10 min	ISO 1133





CYCOLOY™ Resin XCM830

Americas: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	Unit
Injection Molding		
Drying Temperature	120 - 110	°C
Drying Time	2 - 6	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	270 - 300	°C
Nozzle Temperature	260 - 290	°C
Front - Zone 3 Temperature	270 - 300	°C
Middle - Zone 2 Temperature	265 - 290	°C
Rear - Zone 1 Temperature	260 - 270	°C
Mold Temperature	60 - 100	°C
Back Pressure	0.3 - 0.7	MPa
Screw Speed	40 - 70	rpm
Shot to Cylinder Size	30 - 80	%
Vent Depth	0.038 - 0.076	mm



CYCOLOY™ Resin XCM830

Americas: COMMERCIAL


CALCULATED FLOW LENGTH INDICATION

Moldflow® Radial Flow Analysis

CYCOLOY® XCM830

Melt Temperature : 285°C

Mold Temperature : 80°C

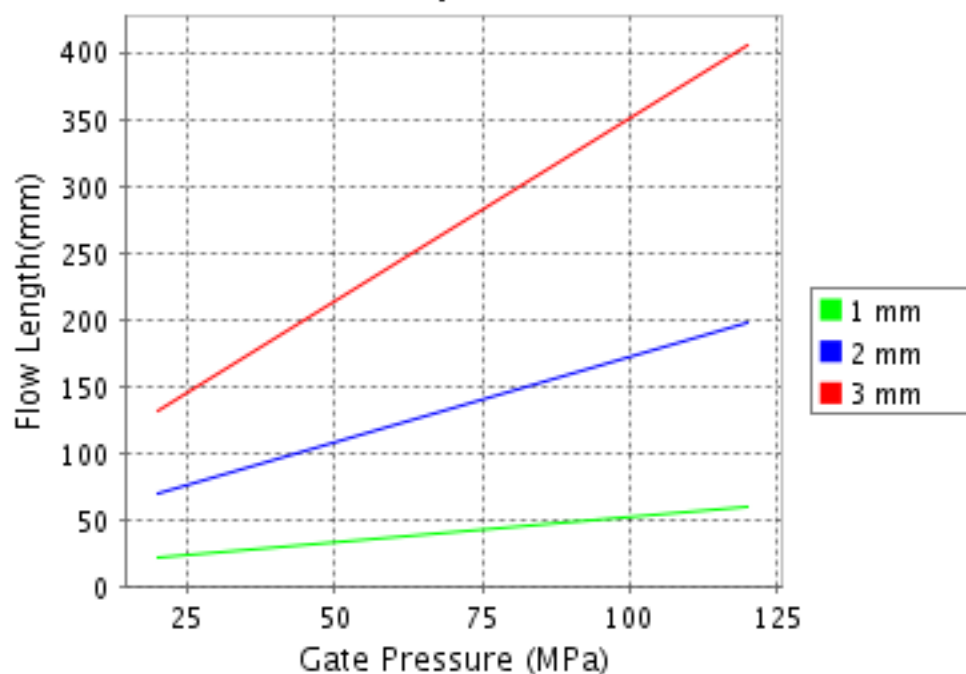

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

© Moldflow is a registered trademark of the Moldflow Corporation.

