

Schulamid 6 GF 50 H

Polyamide 6
LyondellBasell Industries
Engineering Plastics

Product Description

50% glass fiber reinforced PA 6, high strength and stiffness, heat stabilized

General

Filler / Reinforcement	• Glass Fiber, 50% Filler by Weight		
Additive	• Heat Stabilizer		
Features	• Heat Stabilized	• High Stiffness	• High Strength
Processing Method	• Injection Molding		

Physical	Dry	Conditioned	Unit	Test Method
Density	1.55	--	g/cm ³	ISO 1183/A

Viscosity Number	145	--	cm ³ /g	ISO 307
------------------	-----	----	--------------------	---------

Mechanical	Dry	Conditioned	Unit	Test Method
------------	-----	-------------	------	-------------

Tensile Modulus	2.32E+6 (16000)	1.38E+6 (9500)	psi (MPa)	ISO 527-1/1A/1
-----------------	--------------------	-------------------	--------------	----------------

Tensile Stress (Break)	30500 (210)	18900 (130)	psi (MPa)	ISO 527-2/1A/5
------------------------	----------------	----------------	--------------	----------------

Tensile Strain (Break)	2.2	4.5	%	ISO 527-2/1A/5
------------------------	-----	-----	---	----------------

Flexural Modulus	2.18E+6 (15000)	--	psi (MPa)	ISO 178
------------------	--------------------	----	--------------	---------

Flexural Stress	45000 (310)	--	psi (MPa)	ISO 178
-----------------	----------------	----	--------------	---------

Flexural Strain at Flexural Strength	3.1	--	%	ISO 178
--------------------------------------	-----	----	---	---------

Impact	Dry	Conditioned	Unit	Test Method
--------	-----	-------------	------	-------------

Charpy Notched Impact Strength				ISO 179/1eA
--------------------------------	--	--	--	-------------

-22°F (-30°C)	4.8 (10)	--	ft·lb/in ² (kJ/m ²)	
---------------	-------------	----	---	--

73°F (23°C)	7.1 (15)	11 (24)	ft·lb/in ² (kJ/m ²)	
-------------	-------------	------------	---	--

Charpy Unnotched Impact Strength				ISO 179/1eU
----------------------------------	--	--	--	-------------

-22°F (-30°C)	43 (90)	43 (90)	ft·lb/in ² (kJ/m ²)	
---------------	------------	------------	---	--

73°F (23°C)	45 ft·lb/in ² (95 kJ/m ²)	No Break	(kJ/m ²)	
-------------	---	----------	----------------------	--

Hardness	Dry	Conditioned	Unit	Test Method
----------	-----	-------------	------	-------------

Ball Indentation Hardness (H 358/30)	40600 (280)	--	psi (MPa)	ISO 2039-1
--------------------------------------	----------------	----	--------------	------------

Thermal	Dry	Conditioned	Unit	Test Method
---------	-----	-------------	------	-------------

Deflection Temperature Under Load				
-----------------------------------	--	--	--	--

66 Psi (0.45 Mpa), Unannealed	419 (215)	--	°F (°C)	ISO 75-2/Bf
-------------------------------	--------------	----	------------	-------------

264 Psi (1.8 Mpa), Unannealed	401 (205)	--	°F (°C)	ISO 75-2/Af
-------------------------------	--------------	----	------------	-------------



Schulamid 6 GF 50 H


Polyamide 6
LyondellBasell Industries
Engineering Plastics

Thermal	Dry	Conditioned	Unit	Test Method
Vicat Softening Temperature				
--	414 (212)	--	°F (°C)	ISO 306/B50
--	421 (216)	--	°F (°C)	ISO 306/A50
Ball Pressure Test (374°F (190°C))	Pass	--		IEC 60695-10-2
RTI Elec				UL 746B
0.030 In (0.75 Mm)	257 (125)	--	°F (°C)	
0.06 In (1.5 Mm)	257 (125)	--	°F (°C)	
0.12 In (3.0 Mm)	257 (125)	--	°F (°C)	
RTI Imp				UL 746B
0.030 In (0.75 Mm)	239 (115)	--	°F (°C)	
0.06 In (1.5 Mm)	248 (120)	--	°F (°C)	
0.12 In (3.0 Mm)	257 (125)	--	°F (°C)	
RTI Str				UL 746B
0.030 In (0.75 Mm)	266 (130)	--	°F (°C)	
0.06 In (1.5 Mm)	266 (130)	--	°F (°C)	
0.12 In (3.0 Mm)	284 (140)	--	°F (°C)	
Electrical	Dry	Conditioned	Unit	Test Method
Surface Resistivity	> 1.0E+15	> 1.0E+12	ohms	IEC 60093
Volume Resistivity	> 1.0E+13	> 1.0E+10	ohms·m	IEC 62631-3-1
Comparative Tracking Index	450	--	V	IEC 60112
Flammability	Dry	Conditioned	Unit	Test Method
Burning Rate				
0.0787 In (2.00 Mm)	1.2 (30)	--	in/min (mm/min)	ISO 3795
0.0787 In (2.00 Mm)	1.2 (30)	--	in/min (mm/min)	FMVSS 302
Flammability Classification				IEC 60695-11-10, -20
0.030 In (0.75 Mm)	HB	--		
0.06 In (1.5 Mm)	HB	--		
0.12 In (3.0 Mm)	HB	--		
Glow Wire Flammability Index				IEC 60695-2-12
0.06 In (1.5 Mm)	1200 (650)	--	°F (°C)	
0.12 In (3.0 Mm)	1200 (650)	--	°F (°C)	



Schulamid 6 GF 50 H

Polyamide 6
LyondellBasell Industries
Engineering Plastics

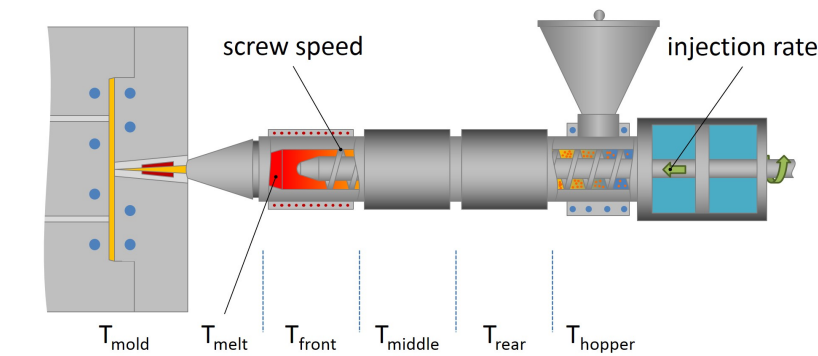

Injection	Dry (English)	Dry (SI)
Drying Temperature	176 °F	80 °C
Drying Time	3.0 to 4.0 hr	3.0 to 4.0 hr
Suggested Max Moisture	0.04 to 0.10 %	0.04 to 0.10 %
Processing (Melt) Temp	482 to 536 °F	250 to 280 °C
Mold Temperature	140 to 212 °F	60 to 100 °C

Notes

These are typical property values not to be construed as specification limits.

