

Schulamid 66 GF 35 HE

Polyamide 66
LyondellBasell Industries
Engineering Plastics

Product Description

35% glass fiber reinforced PA 66, heat stabilized and electrically neutral

General

Filler / Reinforcement	• Glass Fiber, 35% Filler by Weight
Additive	• Heat Stabilizer
Features	• Heat Stabilized
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.40 g/cm ³	1.40 g/cm ³	ISO 1183/A
Viscosity Number	150 cm ³ /g	150 cm ³ /g	ISO 307
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	1.74E+6 psi	12000 MPa	ISO 527-1/1A/1
Tensile Stress (Break)	31200 psi	215 MPa	ISO 527-2/1A/5
Tensile Strain (Break)	3.0 %	3.0 %	ISO 527-2/1A/5
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength (73°F (23°C))	7.1 ft·lb/in ²	15 kJ/m ²	ISO 179/1eA
Charpy Unnotched Impact Strength 73°F (23°C)	No Break	No Break	ISO 179/1eU
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load 264 Psi (1.8 Mpa), Unannealed	428 °F	220 °C	ISO 75-2/Af
Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Surface Resistivity	> 1.0E+15 ohms	> 1.0E+15 ohms	IEC 60093
Volume Resistivity	> 1.0E+13 ohms·m	> 1.0E+13 ohms·m	IEC 62631-3-1
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 In (2.00 Mm)	1.2 in/min	30 mm/min	ISO 3795
0.0787 In (2.00 Mm)	1.2 in/min	30 mm/min	FMVSS 302


Additional Information

- 1.) Not for use in food contact applications
- 2.) Not for use in medical or pharmaceutical applications



Schulamid 66 GF 35 HE

Polyamide 66
LyondellBasell Industries
Engineering Plastics

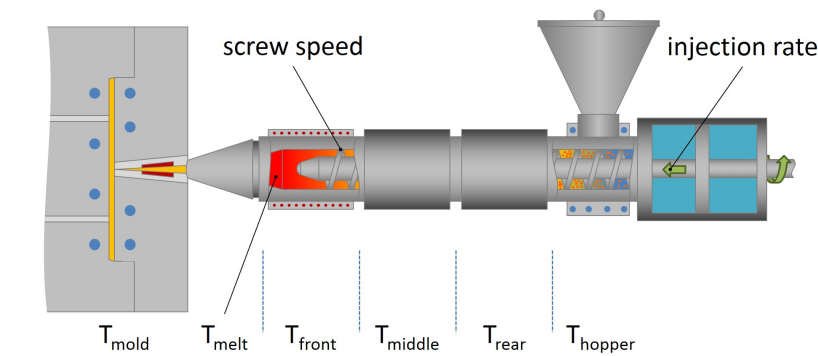

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	3.0 to 4.0 hr	3.0 to 4.0 hr
Suggested Max Moisture	0.04 to 0.10 %	0.04 to 0.10 %
Processing (Melt) Temp	536 to 572 °F	280 to 300 °C
Mold Temperature	140 to 248 °F	60 to 120 °C

Notes

These are typical property values not to be construed as specification limits.

