

Ferro Pp TPP25AP93BK

Polypropylene Copolymer

LyondellBasell Industries

Engineering Plastics

General			
Filler / Reinforcement	• Talc, 25% Filler by Weight		
Additive	• UV Stabilizer		
Features	• Copolymer		
Forms	• Pellets		
Processing Method	• Injection Molding		

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.10	1.10 g/cm ³	ASTM D792
Melt Mass-Flow Rate (MFR) (230°C/2.16 Kg)	21 g/10 min	21 g/10 min	ASTM D1238

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength ¹ (Yield, 73°F (23°C))	3580 psi	24.7 MPa	ASTM D638
Tensile Elongation (Break, 73°F (23°C))	30 %	30 %	ASTM D638
Flexural Modulus			ASTM D790
1% Secant : 73°F (23°C)	240000 psi	1660 MPa	
Tangent : 73°F (23°C)	278000 psi	1920 MPa	
Flexural Strength ² (Yield, 73°F (23°C))	5060 psi	34.9 MPa	ASTM D790

Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact (73°F (23°C))	1.5 ft·lb/in	78 J/m	ASTM D256


Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
66 Psi (0.45 Mpa), Unannealed	226 °F	108 °C	
264 Psi (1.8 Mpa), Unannealed	135 °F	57.0 °C	

Additional Information			
Filler Content, ASTM D2584: 25.3%			



Ferro Pp TPP25AP93BK

Polypropylene Copolymer
LyondellBasell Industries
Engineering Plastics

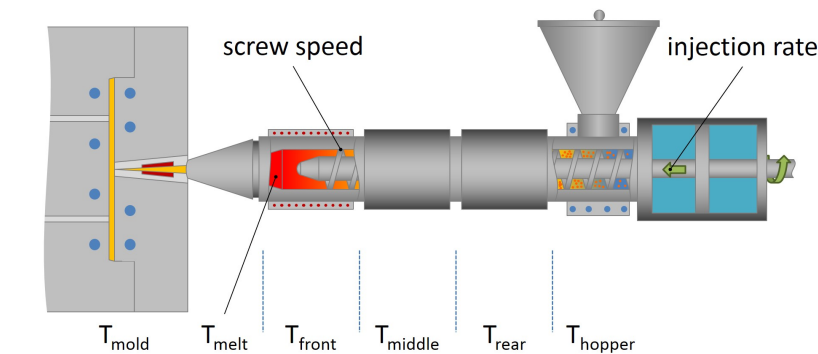

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	2.0 to 3.0 hr	2.0 to 3.0 hr
Processing (Melt) Temp	428 to 500 °F	220 to 260 °C
Mold Temperature	86 to 140 °F	30 to 60 °C



***Ferro Pp* TPP25AP93BK**

Polypropylene Copolymer
LyondellBasell Industries
Engineering Plastics

Notes

¹ 20 in/min (500 mm/min)

² 0.051 in/min (1.3 mm/min)

Notes

These are typical property values not to be construed as specification limits.

