

Gapex RPP30EB56BK

Polypropylene Homopolymer

LyondellBasell Industries

Engineering Plastics

General			
Additive	• Heat Stabilizer		
Features	• Chemically Coupled	• Heat Stabilized	
Automotive Specifications	• CHRYSLER MS-DB-500 CPN3580 Color: Black	• FORD WSS-M4D732-A5	
Appearance	• Black		
Forms	• Pellets		

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.14 g/cm ³	1.14 g/cm ³	ISO 1183
Melt Mass-Flow Rate (MFR) (230°C/2.16 Kg)	4.0 g/10 min	4.0 g/10 min	ISO 1133
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Stress (Yield, 73°F (23°C))	10400 psi	71.9 MPa	ISO 527-2
Flexural Modulus (73°F (23°C))	725000 psi	5000 MPa	ISO 178
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact Strength			ISO 180
-40°F (-40°C)	2.3 ft·lb/in ²	4.9 kJ/m ²	
73°F (23°C)	3.2 ft·lb/in ²	6.8 kJ/m ²	
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			
66 Psi (0.45 Mpa), Unannealed	311 °F	155 °C	ISO 75-2/B
264 Psi (1.8 Mpa), Unannealed	288 °F	142 °C	ISO 75-2/A


Additional Information

Tensile/Izod Change, 1,000 hrs @ 140°C, ISO 188: +7/-12



Gapex RPP30EB56BK

Polypropylene Homopolymer
LyondellBasell Industries
Engineering Plastics

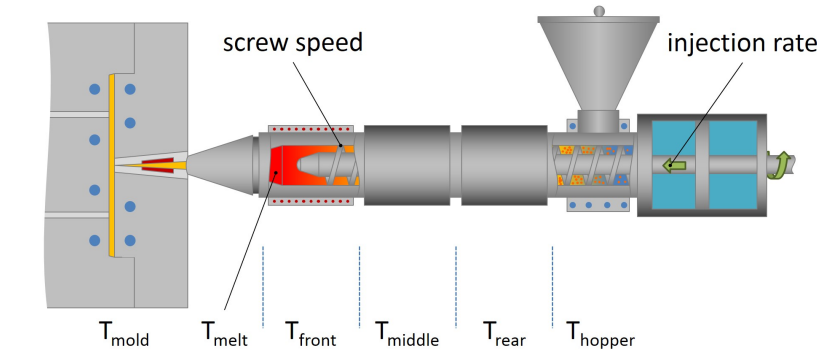

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	160 to 180 °F	71 to 82 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Rear Temperature	430 to 460 °F	221 to 238 °C
Middle Temperature	440 to 470 °F	227 to 243 °C
Front Temperature	450 to 500 °F	232 to 260 °C
Nozzle Temperature	450 to 500 °F	232 to 260 °C
Processing (Melt) Temp	430 to 460 °F	221 to 238 °C
Mold Temperature	100 to 150 °F	38 to 66 °C
Injection Rate	Slow-Moderate	Slow-Moderate
Back Pressure	20.0 to 50.0 psi	0.138 to 0.345 MPa
Cushion	0.200 to 0.500 in	5.08 to 12.7 mm

Notes

These are typical property values not to be construed as specification limits.

