



Lucent Pp GPP-0220

Polypropylene
LyondellBasell Industries
Engineering Plastics

Product Description
20% Glass Fiber Reinforced, Chemically Coupled, Impact Modified Polypropylene

Melt Flow Adjustable for Application
Colors Available
Add "U" for UV Stabilized
Add "H" for Heat Stabilized

General	
Filler / Reinforcement	• Glass Fiber, 20% Filler by Weight
Additive	• Impact Modifier
Features	• Chemically Coupled • Impact Modified
Appearance	• Colors Available
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.04	1.04 g/cm³	ASTM D792

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (Yield)	8200 psi	56.5 MPa	ASTM D638
Tensile Elongation (Break)	5.0 %	5.0 %	ASTM D638
Flexural Modulus	425000 psi	2930 MPa	ASTM D790
Flexural Strength	10500 psi	72.4 MPa	ASTM D790


Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact (0.125 In (3.18 Mm))	2.0 ft·lb/in	110 J/m	ASTM D256

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load 264 Psi (1.8 Mpa), Unannealed	260 °F	127 °C	ASTM D648



Lucent Pp GPP-0220

Polypropylene
LyondellBasell Industries
Engineering Plastics

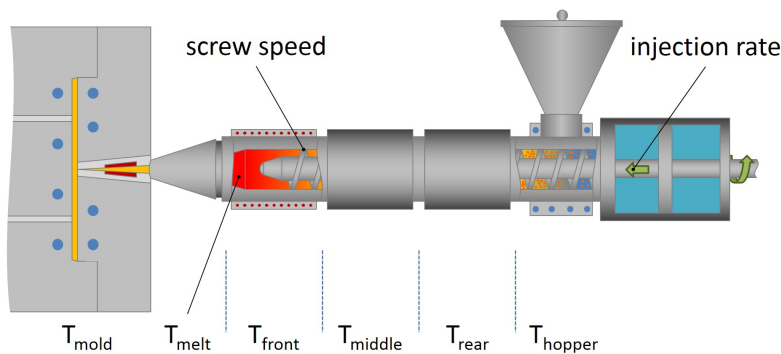

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	2.0 to 3.0 hr	2.0 to 3.0 hr
Processing (Melt) Temp	428 to 500 °F	220 to 260 °C
Mold Temperature	86 to 140 °F	30 to 60 °C

Notes

These are typical property values not to be construed as specification limits.

