

Matrixx FPP3B30CCUVNA

Polypropylene Copolymer

LyondellBasell Industries

Engineering Plastics

Product Description

FPP3B30CCUVNA is a 30% Glass-Reinforced, Chemically Coupled, UV Stabilized Polypropylene Copolymer, Natural Color

General

Filler / Reinforcement	• Glass Fiber, 30% Filler by Weight		
Features	• Chemically Coupled	• High Impact Resistance	• UV Stabilized
Appearance	• Natural Color		
Forms	• Pellets		
Processing Method	• Injection Molding		

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.14	1.14 g/cm ³	ASTM D792
Melt Mass-Flow Rate (MFR) (230°C/2.16 Kg)	8.0 g/10 min	8.0 g/10 min	ASTM D1238
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (Yield, 73°F (23°C))	9800 psi	67.6 MPa	ASTM D638
Tensile Elongation (Yield)	10 %	10 %	ASTM D638
Flexural Modulus - Tangent	700000 psi	4830 MPa	ASTM D790
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact	2.1 ft-lb/in	110 J/m	ASTM D256

Additional Information


1EB38A/PR4290

Revision: 5/2/2020



Matrixx FPP3B30CCUVNA

Polypropylene Copolymer
LyondellBasell Industries
Engineering Plastics

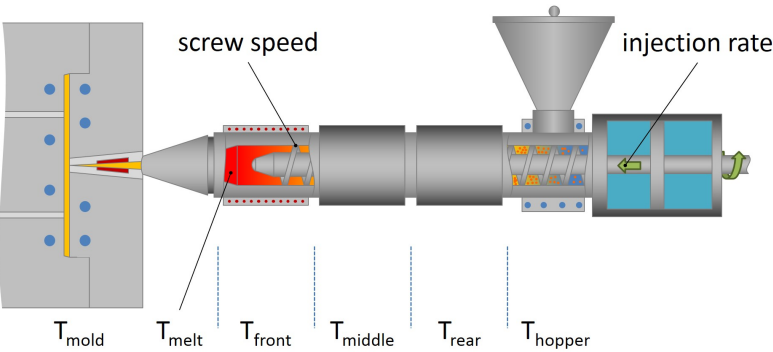

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	180 to 220 °F	82 to 104 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Rear Temperature	390 to 470 °F	199 to 243 °C
Middle Temperature	390 to 470 °F	199 to 243 °C
Front Temperature	390 to 470 °F	199 to 243 °C
Processing (Melt) Temp	390 to 470 °F	199 to 243 °C
Mold Temperature	60 to 150 °F	16 to 66 °C
Injection Rate	Moderate	Moderate
Back Pressure	< 50.0 psi	< 0.345 MPa
Screw Speed	20 to 60 rpm	20 to 60 rpm
Cushion	0.250 to 0.500 in	6.35 to 12.7 mm

Injection Notes

Drying not normally required

Notes

These are typical property values not to be construed as specification limits.

