

Polyflam HSF 36

General Purpose Polystyrene

LyondellBasell Industries

Engineering Plastics

Product Description

High impact flame-retardant PS grade; without PBDE

General

Features	• Flame Retardant
UL File Number	• E86615
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.18 g/cm ³	1.18 g/cm ³	ISO 1183/A
Melt Volume-Flow Rate (MVR) (200°C/5.0 Kg)	5.0 cm ³ /10min	5.0 cm ³ /10min	ISO 1133
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	305000 psi	2100 MPa	ISO 527-1/1A/1
Tensile Stress (Yield)	3630 psi	25.0 MPa	ISO 527-2/1A/50
Tensile Strain (Yield)	2.0 %	2.0 %	ISO 527-2/1A/50
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			ISO 179/1eA
-22°F (-30°C)	0.95 ft·lb/in ²	2.0 kJ/m ²	
73°F (23°C)	4.8 ft·lb/in ²	10 kJ/m ²	
Charpy Unnotched Impact Strength			ISO 179/1eU
-22°F (-30°C)	19 ft·lb/in ²	40 kJ/m ²	
73°F (23°C)	38 ft·lb/in ²	80 kJ/m ²	
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			
66 Psi (0.45 Mpa), Unannealed	187 °F	86.0 °C	ISO 75-2/Bf
264 Psi (1.8 Mpa), Unannealed	167 °F	75.0 °C	ISO 75-2/Af
Vicat Softening Temperature			
--	187 °F	86.0 °C	ISO 306/B50
--	212 °F	100 °C	ISO 306/A50
Ball Pressure Test (176°F (80°C))	Pass	Pass	IEC 60695-10-2
RTI Elec			UL 746B
0.06 In (1.5 Mm)	122 °F	50.0 °C	
0.12 In (3.0 Mm)	122 °F	50.0 °C	
RTI Imp			UL 746B
0.06 In (1.5 Mm)	122 °F	50.0 °C	
0.12 In (3.0 Mm)	122 °F	50.0 °C	
RTI Str			UL 746B
0.06 In (1.5 Mm)	122 °F	50.0 °C	
0.12 In (3.0 Mm)	122 °F	50.0 °C	
Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Surface Resistivity	> 1.0E+15 ohms	> 1.0E+15 ohms	IEC 60093
Volume Resistivity	> 1.0E+13 ohms·m	> 1.0E+13 ohms·m	IEC 62631-3-1
Comparative Tracking Index	350 V	350 V	IEC 60112
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 In (2.00 Mm), Self-extinguishing	0.0 in/min	0.0 mm/min	FMVSS 302
0.0787 In (2.00 Mm), Self-extinguishing	0.0 in/min	0.0 mm/min	ISO 3795






Polyflam HSF 36
General Purpose Polystyrene
LyondellBasell Industries
Engineering Plastics

Flammability	Nominal Value (English)		Nominal Value (SI)		Test Method
Flame Rating					UL 94
0.06 In (1.5 Mm)		V-0		V-0	IEC 60695-11-10, -20
0.12 In (3.0 Mm)	•	V-0	•	V-0	
	•	5VA	•	5VA	
0.15 In (3.9 Mm)	•	V-0	•	V-0	
	•	5VA	•	5VA	
0.08 In (2.0 Mm)		5VB		5VB	
Glow Wire Flammability Index					IEC 60695-2-12
0.06 In (1.5 Mm)	1760 °F		960 °C		
0.12 In (3.0 Mm)	1760 °F		960 °C		
Glow Wire Ignition Temperature					IEC 60695-2-13
0.06 In (1.5 Mm)	1200 °F		650 °C		
0.12 In (3.0 Mm)	1160 °F		625 °C		
Oxygen Index	26 %		26 %		ISO 4589-2



Polyflam HSF 36
General Purpose Polystyrene
LyondellBasell Industries
Engineering Plastics

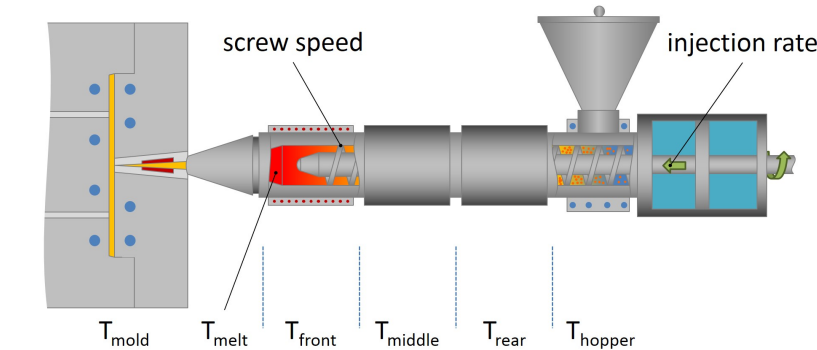

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	158 to 176 °F	70 to 80 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Processing (Melt) Temp	374 to 428 °F	190 to 220 °C
Mold Temperature	86 to 140 °F	30 to 60 °C
Injection Rate	Slow-Moderate	Slow-Moderate
Back Pressure	725 to 1450 psi	5.00 to 10.0 MPa
Screw Speed	< 709 in/min	< 18 m/min

Injection Notes

Mould surface contacting melt should
be of non-corrosive steel (content of chrome > 12%)

Notes

These are typical property values not to be construed as specification limits.

