

Network Polymers Sbs 1000

Styrene Butadiene Block Copolymer

LyondellBasell Industries


Engineering Plastics

General			
Features	• Food Contact Acceptable		
Agency Ratings	• FDA 21 CFR 177.1640		
Appearance	• Clear/Transparent		
Processing Method	• Injection Molding		
Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.03	1.03 g/cm ³	ASTM D792
Melt Mass-Flow Rate (MFR) ¹ (200°C/5.0 Kg)	11 g/10 min	11 g/10 min	ASTM D1238
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength ² (Break)	3300 psi	22.8 MPa	ASTM D638
Flexural Modulus ³	250000 psi	1720 MPa	ASTM D790B
Flexural Strength ³	5400 psi	37.2 MPa	ASTM D790B
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact (0.125 In (3.18 Mm))	0.50 ft·lb/in	27 J/m	ASTM D256A
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Durometer Hardness (Shore D)	60 to 70	60 to 70	ASTM D2240
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load 66 Psi (0.45 Mpa), Unannealed	170 °F	76.7 °C	ASTM D648
Vicat Softening Temperature	195 °F	90.6 °C	ASTM D1525 ⁴
Optical	Nominal Value (English)	Nominal Value (SI)	Test Method
Haze	< 4.00 %	< 4.00 %	ASTM D1003
Color, Yellowness Index ⁵	< 8.40	< 8.40	



Network Polymers Sbs 1000

Styrene Butadiene Block Copolymer
LyondellBasell Industries
Engineering Plastics

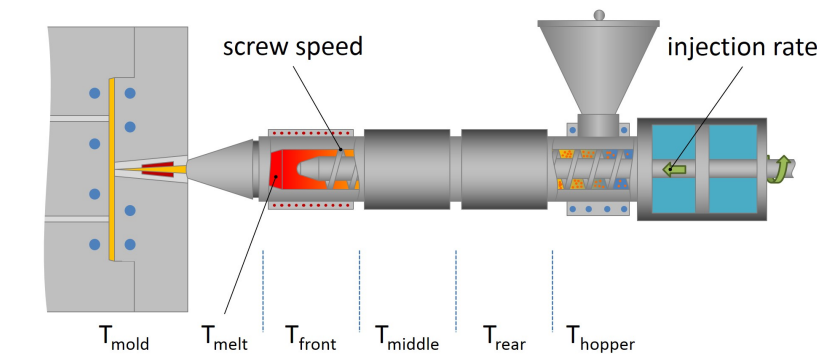

Injection	Nominal Value (English)	Nominal Value (SI)
Suggested Shot Size	40 to 80 %	40 to 80 %
Rear Temperature	340 °F	171 °C
Middle Temperature	360 °F	182 °C
Front Temperature	375 °F	191 °C
Nozzle Temperature	400 °F	204 °C
Processing (Melt) Temp	< 450 °F	< 232 °C
Mold Temperature	80 °F	27 °C
Injection Pressure	1100 psi	7.58 MPa
Back Pressure	90.0 psi	0.621 MPa
Screw Speed	200 rpm	200 rpm

Injection Notes

Injection Speed: 0.5 in/sec

Notes

- ¹ Procedure A
- ² 2.0 in/min (51 mm/min)
- ³ Method I (3 point load), 0.050 in/min (1.3 mm/min)
- ⁴ Loading 1 (10 N)
- ⁵ BAM 1015

Notes

These are typical property values not to be construed as specification limits.

