

Durethan[®] ECOBKV50H2.0

PA6—GF50

50% Glass Reinforced, Injection Molding, Heat Stabilized, Recycled Content

Sustainability

Mass balanced
Recycled based

PROPERTIES	TYPICAL DATA	UNIT	TEST METHOD
MECHANICAL PROPERTIES		DRY / COND	
Tensile modulus	16300 / 9800	MPa	ISO 527-1/-2
Stress at break	220 / 140	MPa	ISO 527-1/-2
Strain at break	3 / 5	%	ISO 527-1/-2
Flexural modulus	15100 / 9700	MPa	ISO 178
Flexural strength	360 / 230	MPa	ISO 178
Tensile modulus (200°C)	4780	MPa	ISO 527-1/-2
Charpy impact strength (+23°C)	100 / 100	kJ/m ²	ISO 179/1eU
Charpy impact strength (-30°C)	85 / 80	kJ/m ²	ISO 179/1eU
Charpy notched impact strength (+23°C)	20 / 25	kJ/m ²	ISO 179/1eA
Charpy notched impact strength (-30°C)	15 / 13	kJ/m ²	ISO 179/1eA
Izod notched impact strength (+23°C)	20 / 25	kJ/m ²	ISO 180/1A
THERMAL PROPERTIES		DRY / COND	
Melting temperature (10°C/min)	222 / *	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	205 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	215 / *	°C	ISO 75-1/-2
Coeff. of linear therm. expansion (parallel)	0.2 / *	E-4/°C	ISO 11359-1/-2
Coeff. of linear therm. expansion (normal)	0.7 / *	E-4/°C	ISO 11359-1/-2
Burning Behav. at 1.5 mm nom. thickn.	HB / *	class	IEC 60695-11-10



Durethan® ECOBKV50H2.0


PROPERTIES	TYPICAL DATA	UNIT	TEST METHOD
Thickness tested	1.5 / *	mm	IEC 60695-11-10
Burning Behav. at 3.0 mm nom. thickn.	HB / *	class	IEC 60695-11-10
Thickness tested	3 / *	mm	IEC 60695-11-10
Burning Behav. at 0.75 mm nom. thickn.	HB / *	class	IEC 60695-11-10
Thickness tested	0.75 / *	mm	IEC 60695-11-10
Oxygen index	24 / *	%	ISO 4589-1/-2
Glow Wire Flammability Index GWFI	650 / -	°C	IEC 60695-2-12
GWFI (Thickness (1) tested)	2 / -	mm	IEC 60695-2-12

ELECTRICAL PROPERTIES	DRY / COND		
Relative permittivity (100Hz)	5.3 / 14.2	-	IEC 62631-2-1
Relative permittivity (1 MHz)	4.3 / 5	-	IEC 62631-2-1
Dissipation factor (100 Hz)	360 / 3190	E-4	IEC 62631-2-1
Dissipation factor (1 MHz)	240 / 890	E-4	IEC 62631-2-1
Volume resistivity	>1E13 / 1E11	Ohm*m	IEC 62631-3-1
Surface resistivity	* / 1E13	Ohm	IEC 62631-3-2
Electric strength	35 / 26	kV/mm	IEC 60243-1
Comparative tracking index	550 / -	V	IEC 60112

OTHER PROPERTIES	DRY / COND		
Water absorption	5 / *	%	Sim. to ISO 62
Humidity absorption	1.5 / *	%	Sim. to ISO 62
Density	1570 / -	kg/m³	ISO 1183

MATERIAL SPECIFIC PROPERTIES	DRY / COND		
Viscosity number	140 / *	cm³/g	ISO 307, 1157, 1628

PROCESSING RECOMMENDATIONS	VALUE		
Drying temperature dry air dryer	80	°C	

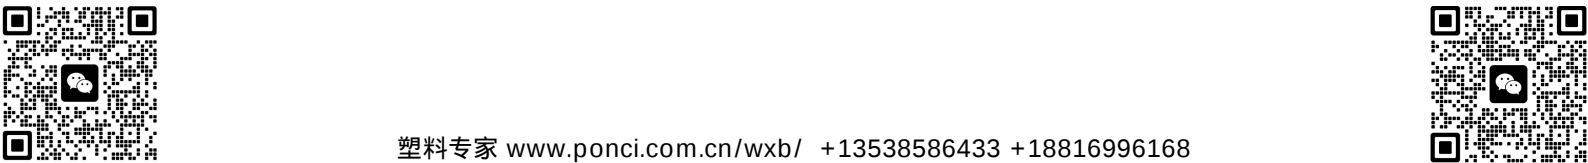

Durethan® ECOBKV50H2.0

PROPERTIES	TYPICAL DATA	UNIT	TEST METHOD
Drying time dry air dryer	2–6	h	
Residual moisture content	0.03–0.12	%	acc. to Karl Fischer
Melt temperature (Tmin – Tmax)	270–290	°C	
Mold temperature	80–120	°C	

