

Pocan[®] B1501FC B—MB

PBT

Injection Molding, Unreinforced, Extrusion, Food Contact Quality

PROPERTIES	TYPICAL DATA	UNIT	TEST METHOD
RHEOLOGICAL PROPERTIES		VALUE	
Melt volume—flow rate	16	cm ³ /10min	ISO 1133
Temperature	250	°C	ISO 1133
Load	2.16	kg	ISO 1133
Molding shrinkage (normal)	1.8	%	ISO 294—4
Molding shrinkage (parallel)	1.8	%	ISO 294—4
MECHANICAL PROPERTIES		VALUE	
Tensile modulus	2600	MPa	ISO 527—1/—2
Yield stress	60	MPa	ISO 527—1/—2
Yield strain	4	%	ISO 527—1/—2
Flexural modulus	2600	MPa	ISO 178
Flexural strength	85	MPa	ISO 178
Flexural strain at flexural strength	6	%	ISO 178—A
Charpy impact strength (+23°C)	N	kJ/m ²	ISO 179/1eU
Charpy impact strength (−30°C)	195	kJ/m ²	ISO 179/1eU
Izod impact strength (+23°C)	N	kJ/m ²	ISO 180/1U
Izod impact strength (−30°C)	200	kJ/m ²	ISO 180—1U
THERMAL PROPERTIES		VALUE	
Melting temperature (10°C/min)	225	°C	ISO 11357—1/—3
Temp. of deflection under load (1.80 MPa)	55	°C	ISO 75—1/—2
Temp. of deflection under load (0.45 MPa)	150	°C	ISO 75—1/—2
Coeff. of linear therm. expansion (parallel)	1.1	E−4/°C	ISO 11359—1/—2




Pocan® B1501FC B–MB

PROPERTIES	TYPICAL DATA	UNIT	TEST METHOD
Coeff. of linear therm. expansion (normal)	1.1	E–4/°C	ISO 11359–1/–2
Burning Behav. at 0.75 mm nom. thickn.	HB	class	IEC 60695–11–10
Thickness tested	0.75	mm	IEC 60695–11–10
Burning Behav. at 1.5 mm nom. thickn.	HB	class	IEC 60695–11–10
Thickness tested	1.5	mm	IEC 60695–11–10
Burning Behav. at 3.0 mm nom. thickn.	HB	class	IEC 60695–11–10
Thickness tested	3	mm	IEC 60695–11–10
Oxygen index	24	%	ISO 4589–1/–2
Glow Wire Flammability Index GWFI	750	°C	IEC 60695–2–12
GWFI (Thickness (1) tested)	2	mm	IEC 60695–2–12

ELECTRICAL PROPERTIES	VALUE		
Relative permittivity (100Hz)	3.4	–	IEC 62631–2–1
Relative permittivity (1 MHz)	3.2	–	IEC 62631–2–1
Dissipation factor (100 Hz)	15	E–4	IEC 62631–2–1
Dissipation factor (1 MHz)	190	E–4	IEC 62631–2–1
Surface resistivity	>1E15	Ohm	IEC 62631–3–2
Electric strength	27	kV/mm	IEC 60243–1
Comparative tracking index	600	V	IEC 60112

OTHER PROPERTIES	VALUE		
Water absorption	0.5	%	Sim. to ISO 62
Humidity absorption	0.2	%	Sim. to ISO 62
Density	1310	kg/m³	ISO 1183

PROCESSING RECOMMENDATIONS	VALUE		
Drying temperature circulating air dryer	120	°C	
Drying time circulating air dryer	4–8	h	
Residual moisture content	0.00–0.02	%	acc. to Karl Fischer

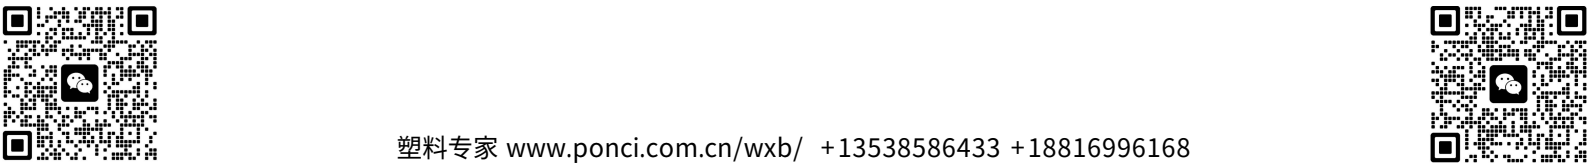

Pocan® B1501FC B–MB

PROPERTIES	TYPICAL DATA	UNIT	TEST METHOD
Melt temperature (Tmin – Tmax)	250–270	°C	
Mold temperature	80–100	°C	

Viscosity–shear rate

