

KOPA® KN333G35CRBK


Injection Molding , PA66+GF35% , Chemical Resistance

Application

Automotive (Water Temp. Controller)

Properties	Measurement condition	Test Method	Unit	Typical value
Physical				
Density		ASTM D792	-	1.40
Shrinkage		ASTM D955	%	0.25~0.85
Water Absorption	23℃ , H ₂ O, 24hr	ASTM D570	%	0.7
Mechanical				
Tensile Strength at Break (3.2mm)	5 mm/min	ASTM D638	MPa	190
Elongation at Break (3.2mm)	5 mm/min	ASTM D638	%	-
Flexural Strength (3.2mm)	5 mm/min	ASTM D790	MPa	300
Flexural Modulus (3.2mm)	5 mm/min	ASTM D790	MPa	10,000
Izod Impact Strength (6.4mm)		ASTM D256		
(Notched)	23 ℃		J/m	140
Rockwell Hardness	R scale	ASTM D785	-	120
Thermal				
Melting Point	20 ℃/min	ASTM D1525	℃	260
Heat Deflection Temperature	1.8 MPa	ASTM D648	℃	250
Flammability (0.8mm)		UL94	Class	-

※ 1Mpa = 10.197162 Kg_f/cm², 1J/m = 0.10197 Kg_f·cm/cm, (Test specimen Thickness)

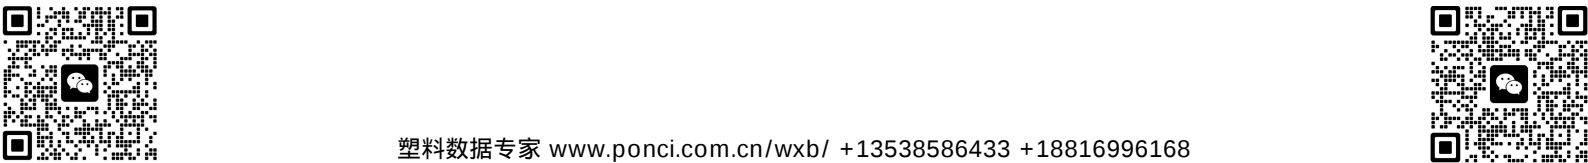

Processing Guide (Injection Molding)

Drying Temperature(℃)	80 ~ 90 (Dehumidifying Dryer)			
Drying Time(hr)	3~5			
Processing Moisture Contents(%)	≤ 0.1			
Cylinder Temperature(℃)	Nozzle	Front	Middle	Rear
	285~315	290	285	270
Mold Temperature(℃)	60~100			

