

Product Information

High Heat & Impact Resistance Grade

KOPA[®] KN3 Series

KOPA[®] KN3 Series is a thermoplastic resin NYLON 66 with excellent mechanical, thermal and electrical properties. It finds wide application in the production of automotive, electrical and industrial parts and components, because it has a long-term heat resistance and excellent mechanical strength, It is suitable for use in internal and external parts.

KOPA[®] KN353HIBL

heat resistance, Impact resistance, Polyamide66/PPE Compound resin

Properties	Test Method	Unit	Typical Value
------------	-------------	------	---------------

Physical

Specific Gravity	ISO 1183	-	1.1	
Filler Contents	ISO 1172	%		
Shrinkage	ISO 294	%	1.6-1.8	
Water Absorption	23°C,H ₂ O, 24hr	ISO 62	%	1

Mechanical

Tensile Strength	23°C	ISO 527	MPa	60
Tensile Elongation	23°C	ISO 527	%	85
Flexural Strength	23°C	ISO 178	MPa	85
Flexural Modulus	23°C	ISO 178	MPa	2,100
Notched Charpy Impact Strength	23°C	ISO 179/1eA	kJ/m ²	40
Rockwell Hardness		ISO 2039-2	R scale	110


Thermal

Melting Point		ISO 11357-1	°C	270-295
Heat Deflection Temperature		ISO 75		
	0.45 MPa		°C	
	1.8 MPa		°C	
Flammability(0.8mm)		UL94		HB

Electrical

Comparative Tracking Index(CTI)	IEC 60112	Volts	
Volume Resistivity	IEC 60093	Ohm-cm	
Surface Resistivity	IEC 60093	Ohm	

Processing Guide (Injection Molding)

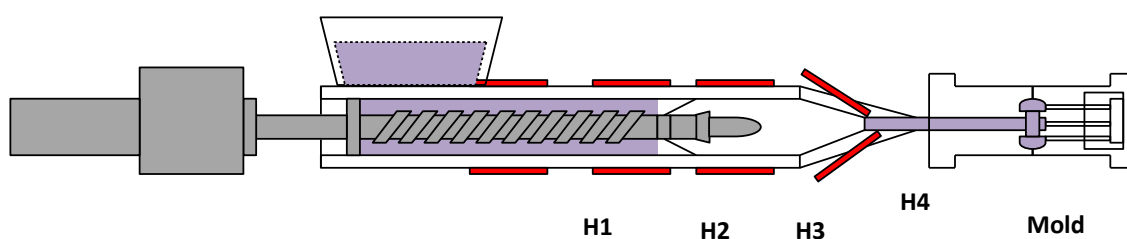

	H1	H2	H3	H4
Cylinder Temperature(°C)	260	270	275	280
Mold Temperature(°C)	60~80			
Processing Moisture Contents(%)	≤0.05			
Pre-drying	Dehumidified Dryer, 80~100°C, 4~5hr			

