


Novamid® ID 1030-CF10

PA6/66

3D printing grade, 10% Carbon Reinforced

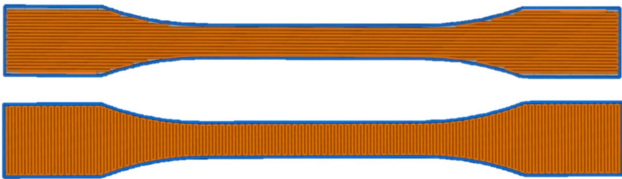

Upper figure: Flat X-X Direction
Lower figure: Flat Y-X Direction

Properties	Typical Data	Unit	Test Method
Mechanical properties		Value	
Tensile modulus (3D printed: flat X-X direction)	7630	MPa	ISO 527-1/-2
Stress at yield (3D printed: flat X-X direction)	110	MPa	ISO 527-1/-2
Strain at yield (3D printed: flat X-X direction)	2.5	%	ISO 527-1/-2
Stress at break (3D printed: flat X-X direction)	110	MPa	ISO 527-1/-2
Strain at break (3D printed: flat X-X direction)	2.2	%	ISO 527-1/-2
Tensile modulus (3D printed: flat Y-X direction)	2720	MPa	ISO 527-1/-2
Stress at yield (3D printed: flat Y-X direction)	63	MPa	ISO 527-1/-2
Strain at yield (3D printed: flat Y-X direction)	3	%	ISO 527-1/-2
Stress at break (3D printed: flat Y-X direction)	58	MPa	ISO 527-1/-2
Strain at break (3D printed: flat Y-X direction)	4.5	%	ISO 527-1/-2
Thermal properties		dry / cond	
Melting temperature (10°C/min)	200 / *	°C	ISO 11357-1/-3
Glass transition temperature (10°C/min)	58 / *	°C	ISO 11357-1/-2
Temp. of deflection under load (1.80 MPa)	153 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	184 / *	°C	ISO 75-1/-2



Property Data (Provisional)

Novamid[®] ID 1030-CF10

Properties	Typical Data	Unit	Test Method
Other properties	dry / cond		
Density	1170 / -	kg/m ³	ISO 1183

