

TECHNICAL DATA SHEET

RILSAN® BMNO P20 TLD

POLYAMIDE 11 PELLET

RILSAN® BMNO P20 TLD is a polyamide 11 compound. It is produced from a renewable & sustainable source (castor oil). This natural plasticized grade is designed for injection molding

Designation : ISO 16396 - PA11-P, M1G1HLR, C12-005

TYPE

PA11-P

MAIN APPLICATIONS

- Outdoor - Equipment/Bicycle/Racket
- Accessories
- Industry - Distribution

DELIVERY FORM

- Pellets

TRANSFORMATION PROCESSES

- Injection Molding

ADDITIVES

- Heat Stabilized
- Light Stabilized
- Plasticizer
- Release agent

RHEOLOGICAL PROPERTIES

PROPERTIES	VALUE	UNIT	TEST STANDARD
Shrinkage, Parallel (t+24h)	1.3	%	ISO 294-4
Shrinkage, Normal (t+24h)	1.4	%	ISO 294-4
Melt volume flow rate (MVR), 235°C / 2.16 kg (455°F / 4.4 lb)	32	cm³/10min	ISO 1133

MECHANICAL PROPERTIES

PROPERTIES	DRY / COND VALUE*	UNIT	TEST STANDARD
Hardness, Shore D, 15 s	- / 61		ISO 868
Charpy unnotched impact strength, 23°C (73°F)	- / No Break		ISO 179 1eU
Charpy unnotched impact strength, -30°C (-22°F)	- / No Break		ISO 179 1eU
Nominal strain at break, 23°C (73°F), 50 mm/min	- / > 50	%	ISO 527-1/-2
Yield strain, 23°C (73°F), 50 mm/min	- / 30	%	ISO 527-1/-2
Yield stress, 23°C (73°F), 50 mm/min	- / 32	MPa	ISO 527-1/-2
Tensile modulus, 23°C (73°F), 1 mm/min	545 / -	MPa	ISO 527-1/-2
Charpy notched impact strength, 23°C (73°F)	No Break / No Break		ISO 179 1eA
Charpy notched impact strength, -30°C (-22°F)	- / 7	kJ/m2	ISO 179 1eA
Flexural modulus, 23°C (73°F)	- / 420	MPa	ISO 178

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditionned.

RILSAN® BMNO P20 TLD

THERMAL PROPERTIES

PROPERTIES	VALUE	UNIT	TEST STANDARD
Vicat softening temperature, 50N at 50°C/h	145	°C	ISO 306
Heat deflection temperature, 0.45 MPa	135	°C	ISO 75-1/-2
Heat deflection temperature, 1.8 MPa	47	°C	ISO 75-1/-2
Melting temperature, 10°C/min	186	°C	ISO 11357-1/-3

ELECTRICAL PROPERTIES

PROPERTIES	DRY / COND VALUE*	UNIT	TEST STANDARD
Surface resistivity, 23°C (73°F)	- / 2.0E+12	Ohm/sq	IEC 62631-3-2
Volumic (transversal) resistivity, 23°C (73°F)	- / 1.0E+10	Ohm.m	IEC 62631-3-1
Comparative tracking index, 23°C (73°F)	- / 600		IEC 60112
Dielectric stress, 23°C (73°F)	- / 26	kV/mm	IEC 60243-1
Relative permittivity, 100Hz	- / 7		IEC 62631-2-1
Relative permittivity, 1Mhz	- / 3		IEC 62631-2-1
Dissipation factor, 100Hz	- / 1900	E-4	IEC 62631-2-1
Dissipation factor, 1Mhz	- / 1900	E-4	IEC 62631-2-1

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditionned.

OTHER PROPERTIES

PROPERTIES	VALUE	UNIT	TEST STANDARD
Water absorption, 23°C (73°F), immersion, equilibrium	1.8	%	ISO 62
Specific gravity, 23°C (73°F)	1.05	g/cm ³	ISO 1183-1

PACKAGING

Available packaging:
• 25 kg / 55 lb bags

SHELF LIFE

Two years from the date of delivery, when stored properly (sealed bags, appropriate moisture, UV protection and temperature). For any use above this limit, please refer to our technical services.

PROCESSING CONDITIONS:

- Typical melt temperature (Min / Recommended / Max) - Injection Molding: 230°C / 250°C / 270°C (445°F / 480°F / 520°F)
- Typical mold temperature - Injection molding: 20-60°C (70-140°F)
- Drying time and temperature: 80-90°C (175-195°F) / 4-6 hours


SPECIAL CHARACTERISTICS

- Bio-based
- Low oligomers


RILSAN® BMNO P20 TLD

DIAGRAMS


Viscosity-shear rate
Rilsan® BMNO P20 TLD

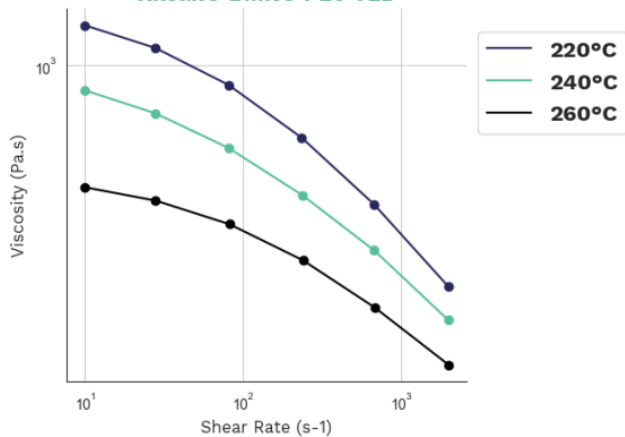

Shearstress-shear rate
Rilsan® BMNO P20 TLD

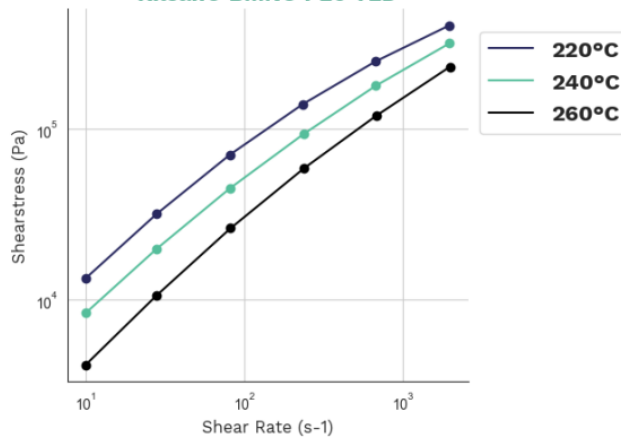

Stress-strain
Rilsan® BMNO P20 TLD

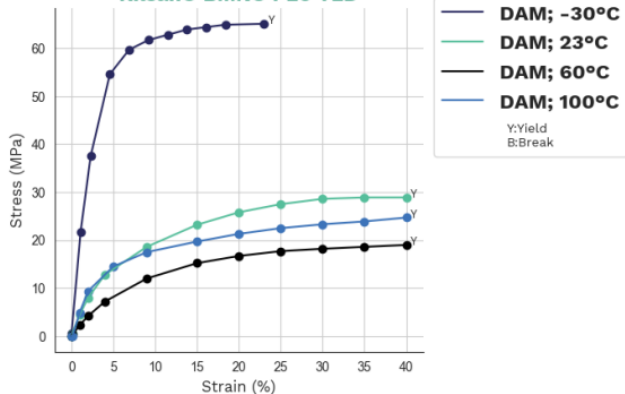

Dynamic Shear modulus-temperature
Rilsan® BMNO P20 TLD

