

RILSAN® BZM 8 O TL

PA11, MHLR, 18-030, GF8

Rilsan® BZM 8 O TL is a fiberglass reinforced polyamide 11 produced from a renewable source. This natural grade is designed for injection.

The percentage of renewable carbon according to ASTM D 6866 (calculated) is >97%.

PROPERTIES	DRY / COND	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Melt Volume-Flow Rate	18 / *	cm ³ /10min	ISO 1133
Temperature	235 / *	°C	-
	455 / *	°F	-
Load	5 / *	kg	-
	11 / *	lb	-
MECHANICAL PROPERTIES			
Tensile Modulus	- / 2300	MPa	ISO 527-1/-2
	- /	psi	
Stress at Break	334000 - / 56	MPa	ISO 527-1/-2
	- / 8120	psi	
Strain at Break	- / 26	%	ISO 527-1/-2
Shore D Hardness	73 / *	-	ISO 868
Charpy Impact Strength, +23°C	- / 93	kJ/m ²	ISO 179/1eU
	- / 44.2	ftlb/in ²	
Charpy Impact Strength, -30°C	- / 88	kJ/m ²	ISO 179/1eU
	- / 41.9	ftlb/in ²	
Charpy Notched Impact Strength, +23°C	- / 10	kJ/m ²	ISO 179/1eA
	- / 4.76	ftlb/in ²	
Charpy Notched Impact Strength, -30°C	- / 5	kJ/m ²	ISO 179/1eA
	- / 2.38	ftlb/in ²	
THERMAL PROPERTIES			
Melting Temperature, 10°C/min	189 / *	°C	ISO 11357-1/-3
Coeff. of Linear Thermal Expansion, parallel	60 / *	E-6/K	ISO 11359-1/-2
Burning Beh. at 1.5 mm Nominal Thickness	HB / *	class	IEC 60695-11-10
Thickness Tested	1.6 / *	mm	-
	0.0630 / *	in	-
Burning Beh. at Thickness h	HB / *	class	IEC 60695-11-10

RILSAN® BZM 8 0 TL

Thickness Tested	3.2 / *	mm	-
	0.1260 / *	in	
Oxygen Index	22 / *	%	ISO 4589-1/-2
OTHER PROPERTIES			
Density	1070 / 1070	kg/m ³	ISO 1183
	1.07 / 1.07	g/cm ³	
%Bio-Based	97	-	ASTM D6866

MAIN APPLICATIONS:

- Spring for quick connectors
- Outsoles

PACKAGING:


This grade is delivered dried in sealed packaging (25 kg bags) ready to be processed.

SHELF LIFE:


Two years from the delivery. For any use above this limit, please refer to our technical services.

DIAGRAMS

STRESS-STRAIN

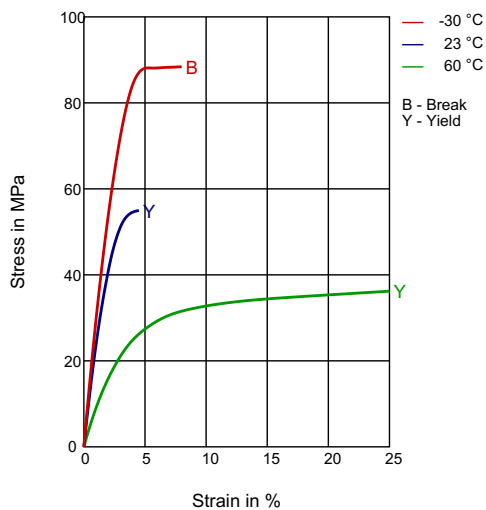

SECANT MODULUS-STRAIN

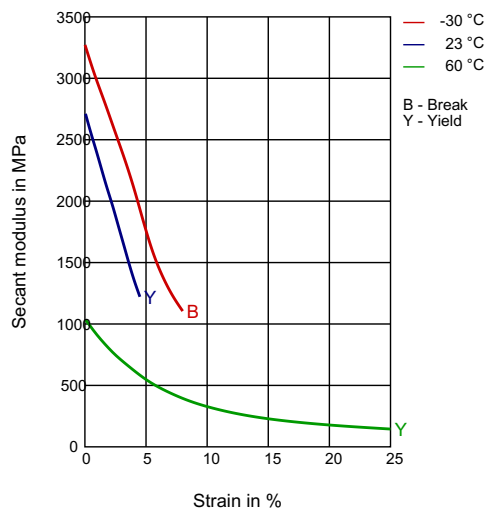

Processing conditions:

- Typical melt temperature (Min / Recommended / Max) : 250°C / 270°C / 290°C.
- Mold temperature : 40 - 90°C

- Drying time and temperature (only necessary for bags opened for more than two hours) : 4-6 hours at 80-90°C.

RILSAN® BZM 8 O TL

PROCESSING Injection Molding	
DELIVERY FORM Pellets	
ADDITIVES Release agent	
SPECIAL CHARACTERISTICS Bio-Based, Heat Stabilized, Light Stabilized	
REGIONAL AVAILABILITY North America, Europe, Asia Pacific, South and Central America, Near East/Africa	