

AKROMID®

B3 GF 30 6 black (20009)

PA6 GF30

AKROMID® B3 GF 30 6 black (20009) is a 30% glass fiber reinforced polyamide 6. It is characterised by a high stiffness and strength. Furthermore, the material is inorganically high heat stabilised and therefore perfectly suitable for technical parts in industrial engineering and in the automotive industry.

Features

heat stabilised 160

Properties

Modulus

10.000 MPa

Strength

180 MPa

Impact

80 kJ/m²

Mechanical Properties

Tensile modulus

ISO 527-2

1 mm/min | d.a.m.

10000 MPa

1 mm/min | conditioned

6500 MPa

Tensile stress at break

ISO 527-2

5 mm/min | d.a.m.

180 MPa

5 mm/min | conditioned

105 MPa

Tensile strain at break

ISO 527-2

5 mm/min | d.a.m.

3 %

5 mm/min | conditioned

5 %

Flexural modulus

ISO 178

2 mm/min | d.a.m.

8000 MPa

Flexural strength

ISO 178

2 mm/min | d.a.m.

250 MPa

Charpy impact strength

ISO 179-1/1eU

23°C | d.a.m.

80 kJ/m²

23°C | conditioned

90 kJ/m²

Charpy notched impact strength

ISO 179-1/1eA

23°C | d.a.m.

13 kJ/m²

23°C | conditioned

18 kJ/m²

Ball indentation hardness

ISO 2039-1

961N/30s | d.a.m.

230 MPa

Thermal Properties

Temperature of deflection under load HDT/A ISO 75	1,8 MPa	210 °C
Melting temperature ISO 11357-3	DSC, 10K/min	220 °C

Flammability

Flammability UL 94	1,6 mm Wall thickness	HB Class
Burning rate (<100 mm/min) FMVSS 302	> 1 mm Thickness	+

General Properties


Density ISO 1183	23°C	1,36 g/cm ³
Humidity absorption ISO 1110	70°C, 62% r.H.	2,1 - 2,3 %
Molding shrinkage ISO 294-4	flow	0,1 - 0,3 %
	transverse	0,5 - 0,7 %

Electrical Properties

Volume resistivity IEC 62631-3-1	d.a.m.	10 ¹³ Ω x cm
	conditioned	10 ¹⁰ Ω x cm
Surface resistivity IEC 62631-3-2	d.a.m.	10 ¹² Ω
	conditioned	10 ¹⁰ Ω

Processing

The values mentioned are recommendations. We only recommend desiccant / dry air dryers or vacuum dryers. Too long a drying time and the resulting residual moisture content below the lower limit can lead to filling problems and surface defects. The specified drying time refers to closed and undamaged bagged material. When processing from previously opened bags or from octabins with polyolefin inliners, a longer drying time may be necessary. It is recommended to check the residual moisture content after the drying process.

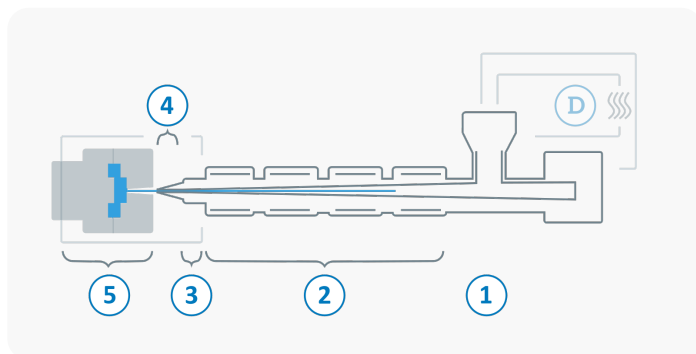

D	Drying time	0 - 4 h
	Drying temperature ($\tau \leq -30^{\circ}\text{C}$)	80 °C
	Processing moisture	0,02 - 0,1 %
1	Feed section	60 - 80 °C
2	Temperature Zone 1 - Zone 4	240 - 290 °C
3	Nozzle temperature	260 - 300 °C
4	Melt temperature	270 - 290 °C
5	Mold temperature	80 - 100 °C
→	Holding pressure, spec.	300 - 800 bar
←	Back pressure, spec.	50 - 150 bar
	Injection speed	medium to high
	Screw speed	8 - 15 m/min

Diagrams

