

AKROMID® PRELIMINARY

NEXT B28 GF 30 9 FR black (8342BMBCI)

PA6 GF30 FR(40)

AKROMID® NEXT B28 GF 30 9 FR black (8342BMBCI) is a flame retardant PA6 with 30% glass fibres. The flame retardant system is free of red phosphorus and halogens, leading to optimised electrical properties for e-mobility applications. This grade meets the requirement according UL94 V0@1.6mm. Due to its very good flowability, it is characterised by easy processability as well as good surface properties. The material has excellent long-term thermal stability and outstanding mechanical properties. The compound is certified according to ISCC PLUS. It includes sustainable biomass-balanced raw materials (PA6 and flame retardant).

Features

biomass balanced heat stabilised 130 electrically neutral easy flow E&E E-Mobility

Properties

Modulus

10.200 MPa

Strength

148 MPa

Impact

75 kJ/m²

Sustainability

Allocation factor

only valid for ISCC PLUS/REDcert² certified products

94 %

Mechanical Properties

Tensile modulus

ISO 527-2

1 mm/min | d.a.m.

10200 MPa

1 mm/min | conditioned

7000 MPa

Tensile stress at break

ISO 527-2

5 mm/min | d.a.m.

148 MPa

5 mm/min | conditioned

98 MPa

Tensile strain at break

ISO 527-2

5 mm/min | d.a.m.

3,2 %

5 mm/min | conditioned

4,6 %

Charpy impact strength

ISO 179-1/1eU

23°C | d.a.m.

75 kJ/m²

23°C | conditioned

80 kJ/m²

Thermal Properties

Temperature of deflection under load HDT/A ISO 75	1,8 MPa	207 °C
Melting temperature ISO 11357-3	DSC, 10K/min	220 °C
Temperature index for 50% loss of tensile strength IEC 60216	5.000 h	165 °C
	20.000 h	135 °C

Flammability

Flammability UL 94	1,6 mm Wall thickness	V-0 Class
	3,2 mm Wall thickness	V-0 Class
GWFI IEC 60695-2-12	1,6 mm Wall thickness	960 °C
HWI UL 746A	1,6 mm Wall thickness	0 PLC
	3,2 mm Wall thickness	0 PLC
HAI UL 746A	1,6 mm Wall thickness	0 PLC
	3,2 mm Wall thickness	0 PLC
Burning rate (<100 mm/min) FMVSS 302	> 1 mm Thickness	+

General Properties

Density ISO 1183	23°C	1,37 g/cm ³
Humidity absorption ISO 1110	70°C, 62% r.H.	2,0 - 2,2 %
Molding shrinkage ISO 294-4	flow	0,1 - 0,3 %
	transverse	0,6 - 0,8 %


Electrical Properties

Volume resistivity IEC 62631-3-1	d.a.m.	10 ¹⁰ Ω x cm
--	--------	-------------------------

Surface resistivity IEC 62631-3-2	d.a.m.	10¹² Ω
Comparative tracking index IEC 60112	Test liquid A	600 V
Comparative tracking index ASTM D3638		0 PLC
Dielectric strength IEC 60243	3 mm	18 kV/mm
Inclined-Plane Tracking, IPT ASTM D2303-13		1,5 kV
High voltage arc tracking rate (HVTR) UL 746A		1 PLC
High Volt, Low Current Arc Resistance ASTM D495		4 PLC

Processing

The values mentioned are recommendations. We only recommend desiccant / dry air dryers or vacuum dryers. Too long a drying time and the resulting residual moisture content below the lower limit can lead to filling problems and surface defects. The specified drying time refers to closed and undamaged bagged material. When processing from previously opened bags or from octabins with polyolefin inliners, a longer drying time may be necessary. It is recommended to check the residual moisture content after the drying process.

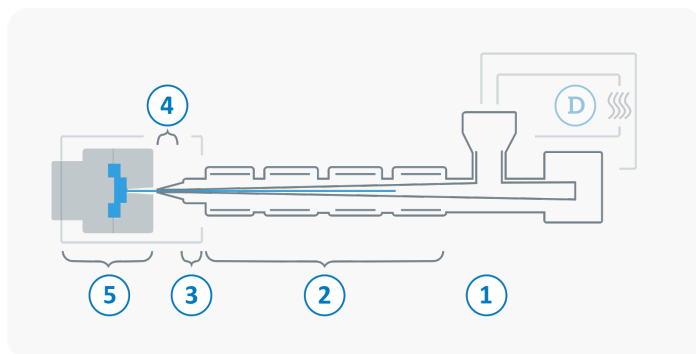

D	Drying time	2 - 4 h
	Drying temperature ($\tau \leq -30^{\circ}\text{C}$)	80 °C
	Processing moisture	0,02 - 0,08 %
1	Feed section	60 - 80 °C
2	Temperature Zone 1 - Zone 4	220 - 280 °C
3	Nozzle temperature	240 - 280 °C
4	Melt temperature	240 - 280 °C
5	Mold temperature	60 - 100 °C
→	Holding pressure, spec.	300 - 800 bar
←	Back pressure, spec.	30 - 100 bar
	Injection speed	medium
	Screw speed	5 - 10 m/min