

AKROMID®

A3 1 S3 black (21002)

PA66-I

AKROMID® A3 1 S3 black (21002) is an unreinforced, impact modified Polyamide 66. It is characterised by a medium dry impact strength and good surface quality. Furthermore, the material is heat stabilised and therefore perfectly suitable for connecting and fixing systems which are used at elevated temperatures in the automotive and electro industry.

Features

heat stabilised 130

impact modified

surface modified

Properties

Modulus

2.300 MPa

Strength

60 MPa

Impact

180 kJ/m²

Mechanical Properties

Tensile modulus

ISO 527-2

1 mm/min | d.a.m.

2300 MPa

1 mm/min | conditioned

800 MPa

Tensile stress at yield

ISO 527-2

50 mm/min | d.a.m.

60 MPa

50 mm/min | conditioned

40 MPa

Tensile strain at break

ISO 527-2

50 mm/min | d.a.m.

45 %

50 mm/min | conditioned

> 200 %

Flexural modulus

ISO 178

2 mm/min | d.a.m.

2500 MPa

2 mm/min | conditioned

1000 MPa

Charpy impact strength

ISO 179-1/1eU

23°C | d.a.m.

no break

23°C | conditioned

no break

-30°C | d.a.m.

no break

-30°C | conditioned

no break

Charpy notched impact strength

ISO 179-1/1eA

23°C | d.a.m.

16 kJ/m²

23°C | conditioned

100 kJ/m²

-30°C | d.a.m.

12 kJ/m²

Thermal Properties

Temperature of deflection under load HDT/A ISO 75	1,8 MPa	60 °C
Melting temperature ISO 11357-3	DSC, 10K/min	262 °C

Flammability

Flammability UL 94	1,6 mm Wall thickness	HB Class
Burning rate (<100 mm/min) FMVSS 302	> 1 mm Thickness	+

General Properties


Density ISO 1183	23°C	1,1 g/cm ³
Humidity absorption ISO 1110	70°C, 62% r.H.	2 %
Molding shrinkage ISO 294-4	flow	1,3 - 1,5 %
	transverse	1,5 - 1,7 %

Electrical Properties

Comparative tracking index IEC 60112	Test liquid A	600 V
--	---------------	-------

Processing

The values mentioned are recommendations. We only recommend desiccant / dry air dryers or vacuum dryers. Too long a drying time and the resulting residual moisture content below the lower limit can lead to filling problems and surface defects. The specified drying time refers to closed and undamaged bagged material. When processing from previously opened bags or from octabins with polyolefin inliners, a longer drying time may be necessary. It is recommended to check the residual moisture content after the drying process.

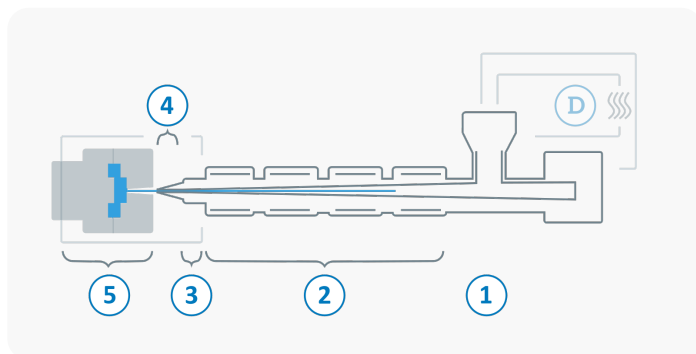

D	Drying time	2 - 4 h
	Drying temperature ($\tau \leq -30^{\circ}\text{C}$)	80 °C
	Processing moisture	0,02 - 0,1 %
1	Feed section	60 - 80 °C
2	Temperature Zone 1 - Zone 4	260 - 300 °C
3	Nozzle temperature	270 - 310 °C
4	Melt temperature	270 - 300 °C
5	Mold temperature	40 - 90 °C
→	Holding pressure, spec.	300 - 800 bar
←	Back pressure, spec.	50 - 150 bar
	Injection speed	medium to high
	Screw speed	8 - 15 m/min

Diagrams

