

AKROMID®

A3 ICF 30 black (5021)

PA66 CF30

AKROMID® A3 ICF 30 black (5021) is a high-performance Polyamide 6.6 with 30% carbon fiber reinforcement, offering exceptional stiffness and flexural strength. Compared to glass fiber-reinforced PA 6.6, it provides an optimized strength-to-weight ratio. Thanks to its low density and high mechanical durability, this material is ideal for load-bearing components in the automotive industry, such as lightweight structural parts, as well as for sports and leisure applications, including high-stress sports equipment and technical components.

Features

- recycled content
- reduced density
- antistatic/conductive
- tribological modified
- Sports & leisure
- lightweight construction

Properties



Sustainability

| | |
|------------------|------|
| Recycled content | 30 % |
|------------------|------|

Mechanical Properties

| | | |
|--------------------------------------|------------------------|-----------|
| Tensile modulus ISO 527-2 | 1 mm/min d.a.m. | 24000 MPa |
| | 1 mm/min conditioned | 15000 MPa |
| Tensile stress at break ISO 527-2 | 5 mm/min d.a.m. | 240 MPa |
| | 5 mm/min conditioned | 170 MPa |
| Tensile strain at break ISO 527-2 | 5 mm/min d.a.m. | 1,8 % |
| | 5 mm/min conditioned | 3,5 % |
| Flexural modulus ISO 178 | 2 mm/min d.a.m. | 22000 MPa |
| | 2 mm/min conditioned | 14000 MPa |
| Flexural strength ISO 178 | 2 mm/min d.a.m. | 370 MPa |
| | 2 mm/min conditioned | 265 MPa |

| | | |
|--|------------------------|----------------------|
| Flexural strain at break ISO 178 | 2 mm/min d.a.m. | 2,5 % |
| | 2 mm/min conditioned | 3,5 % |
| Charpy impact strength ISO 179-1/1eU | 23°C d.a.m. | 55 kJ/m ² |
| | 23°C conditioned | 70 kJ/m ² |
| | -30°C d.a.m. | 55 kJ/m ² |
| Charpy notched impact strength ISO 179-1/1eA | 23°C d.a.m. | 8 kJ/m ² |
| | 23°C conditioned | 11 kJ/m ² |
| | -30°C d.a.m. | 6 kJ/m ² |

Thermal Properties

| | | |
|---|--------------|-----------|
| Temperature of deflection under load HDT/A ISO 75 | 1,8 MPa | 254 °C |
| Melting temperature ISO 11357-3 | DSC, 10K/min | 262 °C |
| Thermal conductivity DIN 52612 | | 0,42 W/mK |

Flammability

| | | |
|---|-----------------------|----------|
| Flammability UL 94 | 1,6 mm Wall thickness | HB Class |
| GWFI IEC 60695-2-12 | 1,6 mm Wall thickness | > 650 °C |
| Burning rate (<100 mm/min) FMVSS 302 | > 1 mm Thickness | + |

General Properties


| | | |
|--|----------------|------------------------|
| Density ISO 1183 | 23°C | 1,28 g/cm ³ |
| Humidity absorption ISO 1110 | 70°C, 62% r.H. | 1,9 % |
| Molding shrinkage ISO 294-4 | flow | 0,1 - 0,3 % |
| | transverse | 0,5 - 0,7 % |

Electrical Properties

| | | |
|---------------------|-------------|---------------|
| Surface resistivity | d.a.m. | $10^4 \Omega$ |
| IEC 62631-3-2 | conditioned | $10^4 \Omega$ |

Processing

The values mentioned are recommendations. We only recommend desiccant / dry air dryers or vacuum dryers. Too long a drying time and the resulting residual moisture content below the lower limit can lead to filling problems and surface defects. The specified drying time refers to closed and undamaged bagged material. When processing from previously opened bags or from octabins with polyolefin inliners, a longer drying time may be necessary. It is recommended to check the residual moisture content after the drying process.

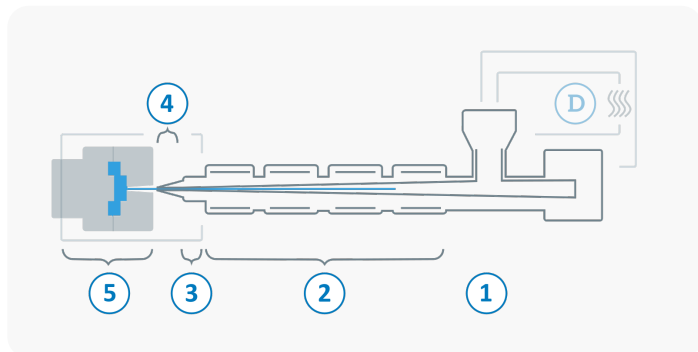

| | | |
|----------|--|----------------|
| D | Drying time | 0 - 4 h |
| | Drying temperature ($\tau \leq -30^{\circ}\text{C}$) | 80 °C |
| | Processing moisture | 0,02 - 0,1 % |
| 1 | Feed section | 60 - 80 °C |
| 2 | Temperature Zone 1 - Zone 4 | 260 - 310 °C |
| 3 | Nozzle temperature | 270 - 310 °C |
| 4 | Melt temperature | 280 - 310 °C |
| 5 | Mold temperature | 80 - 140 °C |
| → | Holding pressure, spec. | 300 - 800 bar |
| ← | Back pressure, spec. | 50 -150 bar |
| | Injection speed | medium to high |
| | Screw speed | 8 - 15 m/min |

Diagrams

