

AKROTEK® PRELIMINARY

PK-VM GF 10 black (8316)

PK GF10

AKROTEK® PK-VM GF 10 black (8316) is a 10% glass fibre reinforced Polyketone with average stiffness and strength. Due to its very good media resistance, the material is suitable for use in applications that carry cooling water. This compound was developed to meet the requirements for a larger process window during processing.

Features

hydrolysis / chemically stabilised

Properties

Modulus

3.500 MPa

Strength

70 MPa

Impact

55 kJ/m²

Mechanical Properties

Tensile modulus

ISO 527-2

1 mm/min | d.a.m.

3500 MPa

1 mm/min | conditioned

3500 MPa

Tensile stress at break

ISO 527-2

5 mm/min | d.a.m.

70 MPa

5 mm/min | conditioned

65 MPa

Tensile strain at break

ISO 527-2

5 mm/min | d.a.m.

7 %

5 mm/min | conditioned

7 %

Charpy impact strength

ISO 179-1/1eU

23°C | d.a.m.

55 kJ/m²

23°C | conditioned

55 kJ/m²

Thermal Properties

Temperature of deflection under load HDT/A

ISO 75

1,8 MPa

205 °C

Melting temperature

ISO 11357-3

DSC, 10K/min

220 °C

Flammability


Flammability UL 94	1,6 mm Wall thickness	HB Class
Burning rate (<100 mm/min) FMVSS 302	> 1 mm Thickness	+

General Properties

Density ISO 1183	23°C	1,32 g/cm³
Humidity absorption ISO 1110	70°C, 62% r.H.	0,7 - 0,9 %
Molding shrinkage ISO 294-4	flow	0,7 - 0,9 %
	transverse	1,3 - 1,5 %

Processing

The values mentioned are recommendations. We only recommend desiccant / dry air dryers or vacuum dryers. Too long a drying time and the resulting residual moisture content below the lower limit can lead to filling problems and surface defects. The specified drying time refers to closed and undamaged bagged material. When processing from previously opened bags or from octabins with polyolefin inliners, a longer drying time may be necessary. It is recommended to check the residual moisture content after the drying process.

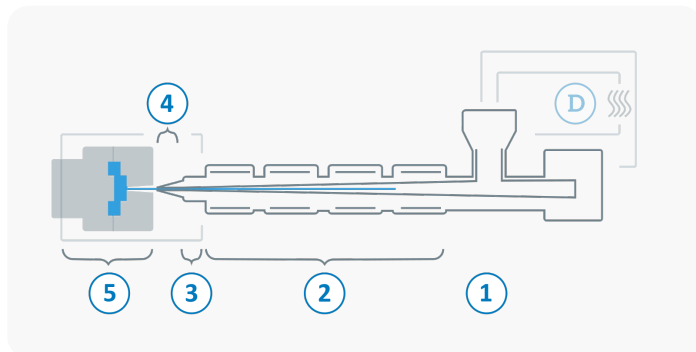

D	Drying time	0 - 4 h
	Drying temperature ($\tau \leq -30^{\circ}\text{C}$)	80 °C
	Processing moisture	0,02 - 0,1 %
1	Feed section	60 - 80 °C
2	Temperature Zone 1 - Zone 4	220 - 260 °C
3	Nozzle temperature	230 - 260 °C
4	Melt temperature	230 - 260 °C
5	Mold temperature	60 - 120 °C
→	Holding pressure, spec.	300 - 800 bar
←	Back pressure, spec.	30 - 70 bar
	Injection speed	medium to high
	Screw speed	8 - 15 m/min