

AKROMID®

T5 GF 50 natural (7834)

PPA GF50

AKROMID® T5 GF 50 natural (7834) is a 50% glass fibre reinforced polyphthalamide. It is characterised by its very high stiffness and strength, even at elevated temperatures up to 120°C. Due to its low moisture absorption, the mechanical properties remain nearly unchanged even in conditioned state. Not only the good creep resistance, but also the hydrolysis and chemical resistance complement the property profile and make it the material of your choice for under the hood applications and connectors with special strength requirements.

Features

heat stabilised 160 hydrolysis / chemically stabilised reduced moisture metal substitution

Properties

Modulus

18.500 MPa

Strength

275 MPa

Impact

95 kJ/m²

Mechanical Properties

Tensile modulus

ISO 527-2

1 mm/min | d.a.m.

18500 MPa

1 mm/min | conditioned

18500 MPa

Tensile stress at break

ISO 527-2

5 mm/min | d.a.m.

275 MPa

5 mm/min | conditioned

275 MPa

Tensile strain at break

ISO 527-2

5 mm/min | d.a.m.

2,1 %

5 mm/min | conditioned

2,1 %

Charpy impact strength

ISO 179-1/1eU

23°C | d.a.m.

95 kJ/m²

Charpy notched impact strength

ISO 179-1/1eA

23°C | d.a.m.

14 kJ/m²

Thermal Properties

Temperature of deflection under load HDT/A

ISO 75

1,8 MPa

280 °C

Temperature of deflection under load HDT/C	8 MPa	235 °C
ISO 75		

Glass transition temperature	DSC, 2nd heating	135 °C
ISO 11357-2		

Melting temperature	DSC, 10K/min	325 °C
ISO 11357-3		

Flammability

Flammability	1,6 mm Wall thickness	HB Class
UL 94		

General Properties


Density	23°C	1,65 g/cm³
ISO 1183		

Humidity absorption	70°C, 62% r.H.	0,8 %
ISO 1110		

Molding shrinkage	flow	0,1 - 0,3 %
ISO 294-4	transverse	0,4 - 0,6 %

Processing

The values mentioned are recommendations. We only recommend desiccant / dry air dryers or vacuum dryers. Too long a drying time and the resulting residual moisture content below the lower limit can lead to filling problems and surface defects. The specified drying time refers to closed and undamaged bagged material. When processing from previously opened bags or from octabins with polyolefin inliners, a longer drying time may be necessary. It is recommended to check the residual moisture content after the drying process.

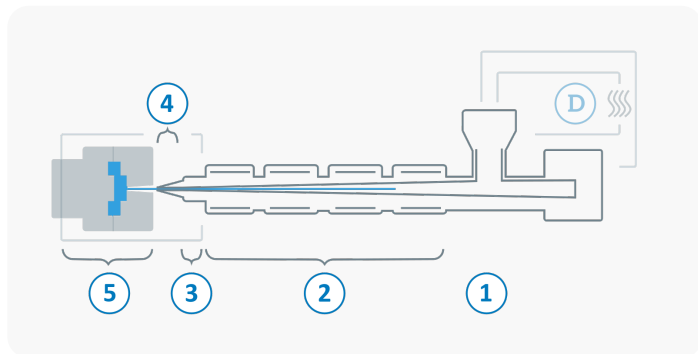

D	Drying time	0 - 4 h
	Drying temperature ($\tau \leq -30^{\circ}\text{C}$)	120 $^{\circ}\text{C}$
	Processing moisture	0,02 - 0,1 %
1	Feed section	60 - 90 $^{\circ}\text{C}$
2	Temperature Zone 1 - Zone 4	320 - 350 $^{\circ}\text{C}$
3	Nozzle temperature	330 - 350 $^{\circ}\text{C}$
4	Melt temperature	330 - 350 $^{\circ}\text{C}$
5	Mold temperature	120 - 160 $^{\circ}\text{C}$
→	Holding pressure, spec.	300 - 800 bar
←	Back pressure, spec.	50 - 150 bar
	Injection speed	medium to high
	Screw speed	8 - 15 m/min