

Technical Data Sheet



ALCOM PP 620/1 WT1034-05LB

MOCOM

Base Polymer	Polypropylene Homopolymer
Filler/Additive System	15 % special filler, 15 % mineral
Special Features	highly reflective, opaque
Market Segment	Automotive, Lighting
Application Area	lighting, light blocking components
Typical Applications	light guides, reflectors

Pre-Drying Conditions	in a dry air (dessiccant) dryer 80-100 °C for 2-3 h in an air circulating dryer 80-100 °C for 2-4 h max. moisture content <0,02 %
Processing Injection Moulding	melt temperature 230-270 °C mould temperature 20-90 °C
Storage	dry, protected from light

Properties	Value	Dimension	Test Norm
Mechanical Properties			
Flexural Modulus	2800	MPa	ISO 178
Flexural Stress (3.5% Strain)	47	MPa	ISO 178
Tensile Modulus	3100	MPa	ISO 527
Tensile Stress at Yield	31	MPa	ISO 527
Tensile Elongation at Yield	4.2	%	ISO 527
Tensile Elongation at Break	9.5	%	ISO 527
Impact Strength (Charpy, 23°C)	40	kJ/m ²	ISO 179/1eU
Impact Strength (Charpy, -40°C)	13	kJ/m ²	ISO 179/1eU
Notched Impact Strength (Charpy, 23°C)	2.5	kJ/m ²	ISO 179/1eA
Notched Impact Strength (Charpy, -40°C)	1.5	kJ/m ²	ISO 179/1eA
Thermal Properties			
Vicat B50	101	°C	ISO 306
HDT / A (1,8 MPa)	79	°C	ISO 75-1/-2
DSC (Melt Point)	167	°C	ISO 11357
Rheological Properties			
Melt Index (MVR)	25	cm ³ /10min	ISO 1133
MVR temperature	230	°C	-
MVR load	2.16	kg	-
Shrinkage (lengthwise, 24h)	1.2 - 1.7	%	ISO 294-4
Shrinkage (lateral, 24h)	0.9 - 1.4	%	ISO 294-4

Technical Data Sheet



ALCOM PP 620/1 WT1034-05LB

MOCOM

Physical Properties


Density	1160	kg/m ³	ISO 1183
---------	------	-------------------	----------

Optical Properties

Tristimulus Value Y10 of Reflection (d=2,0mm)	92	%	DIN 5033
Tristimulus Value Y10 of Transm.,d=0.5mm	0.4	%	ISO 13468

Diagrams

Spectrum Transmission

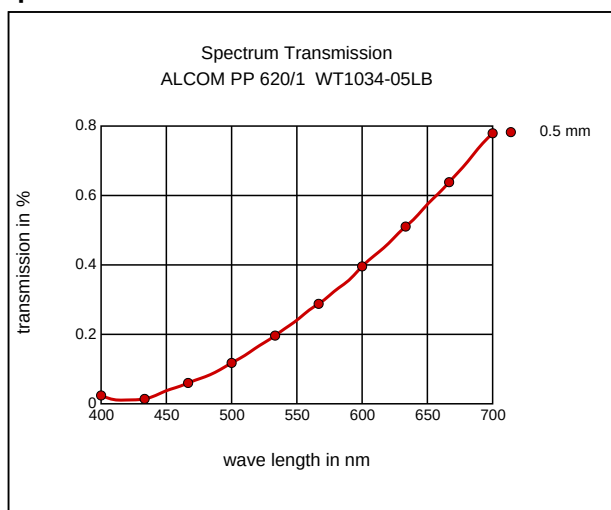

Spectrum Reflexion

