

Durethan® ECOBKV30H2.0 901510
PA6-GF30

Envalior

Injection Molding, 30% Glass Reinforced, Heat Stabilized, Recycled Content

ISO 1043 PA6-GF30

Rheological properties	dry / cond	Unit	Test Standard
ISO Data			
Molding shrinkage, parallel	0.3 / *	%	ISO 294-4, 2577
Molding shrinkage, normal	0.7 / *	%	ISO 294-4, 2577

Mechanical Properties	dry / cond	Unit	Test Standard
ISO Data			
Tensile Modulus	9500 / 5800	MPa	ISO 527
Stress at Break	170 / 100	MPa	ISO 527
Strain at Break	3.5 / 6	%	ISO 527
Tensile Creep Modulus, 1h	* / 5100	MPa	ISO 899-1
Tensile Creep Modulus, 1000h	* / 4100	MPa	ISO 899-1
Impact Strength (Charpy), +23°C	75 / 90	kJ/m²	ISO 179/1eU
Impact Strength (Charpy), -30°C	65 / 60	kJ/m²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	10 / 20	kJ/m²	ISO 179/1eA
Notched Impact Strength (Charpy), -30°C	- / 10	kJ/m²	ISO 179/1eA
Puncture - maximum force, +23°C	1000 / 1230	N	ISO 6603-2
Puncture - maximum force, -30°C	860 / -	N	ISO 6603-2
Puncture energy, +23°C	3 / 6	J	ISO 6603-2
Puncture energy, -30°C	3 / -	J	ISO 6603-2
Flexural Modulus (23°C)	8500 / 5000	MPa	ISO 178
Flexural strength	270 / 160	MPa	ISO 178
Notched Impact Strength (Izod), 23°C	10 / 20	kJ/m²	ISO 180/1A
Notched Impact Strength (Izod)	10 / 10	kJ/m²	ISO 180/1A
Temperature	-30	°C	-
Impact Strength (Izod), 23°C	65 / 80	kJ/m²	ISO 180/1U
Ball Indentation Hardness	210 / 100	MPa	ISO 2039-1

Thermal Properties	dry / cond	Unit	Test Standard
ISO Data			
Melting Temperature (10°C/min)	222 / *	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	200 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	215 / *	°C	ISO 75-1/-2
Coeff. of Linear Therm. Expansion, parallel	20 / *	E-6/K	ISO 11359-1/-2
Coeff. of Linear Therm. Expansion, normal	100 / *	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	HB / *	class	UL 94
Thickness tested	1.5 / *	mm	-
Oxygen index	22 / *	%	ISO 4589-1/-2
Glow Wire (GWFI, Flammability Index)	700	°C	IEC 60695-2-12
GWFI - thickness tested (1)	1.5	mm	-

Electrical Properties	dry / cond	Unit	Test Standard
ISO Data			
Relative permittivity, 100Hz	4.2 / 12	-	IEC 62631-2-1
Relative permittivity, 1MHz	3.8 / 4.4	-	IEC 62631-2-1
Dissipation Factor, 100Hz	100 / 2550	E-4	IEC 62631-2-1
Dissipation Factor, 1MHz	170 / 780	E-4	IEC 62631-2-1
Volume Resistivity	1E13 / 1E10	Ohm*m	IEC 62631-3-1
Surface Resistivity	* / 1E13	Ohm	IEC 62631-3-2
Electric Strength	35 / 30	kV/mm	IEC 60243-1
Comparative tracking index	425 / -	-	IEC 60112

Other Properties	dry / cond	Unit	Test Standard
ISO Data			
Water Absorption	7 / *	%	Sim. to ISO 62
Humidity absorption	2.1 / *	%	Sim. to ISO 62
Density	1360 / -	kg/m³	ISO 1183
Bulk density	700	kg/m³	-

Durethan® ECOBKV30H2.0 901510
PA6-GF30

Envalior


Material Specific Properties	dry / cond	Unit	Test Standard
ISO Data			
Viscosity number	140 / *	cm ³ /g	ISO 307, 1157, 1628

Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	280	°C	ISO 294
Injection Molding, mold temperature	80	°C	ISO 294


Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	80	°C	-
Pre-drying - Time	2 - 6	h	-
Processing humidity	≤0.12	%	-
Melt temperature	270 - 290	°C	-
Mold temperature	80 - 120	°C	-

Diagrams

Viscosity-shear rate

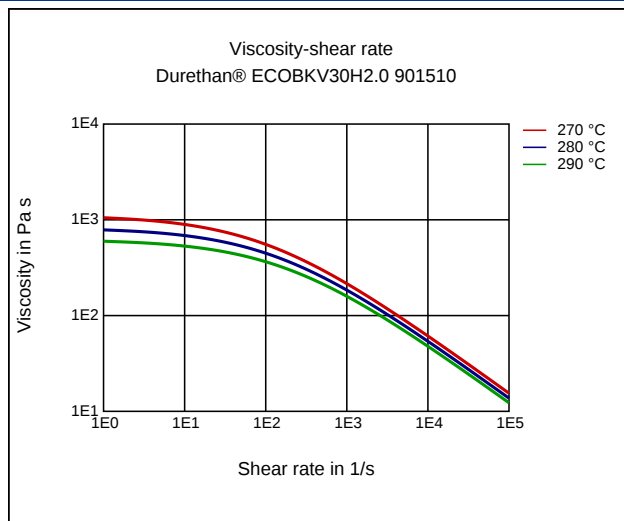


Shearstress-shear rate

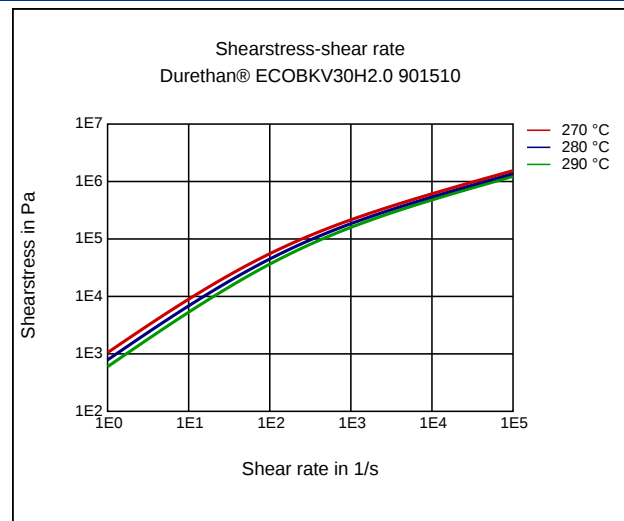


Durethan® ECOBKV30H2.0 901510
PA6-GF30

Envalior


Stress-strain

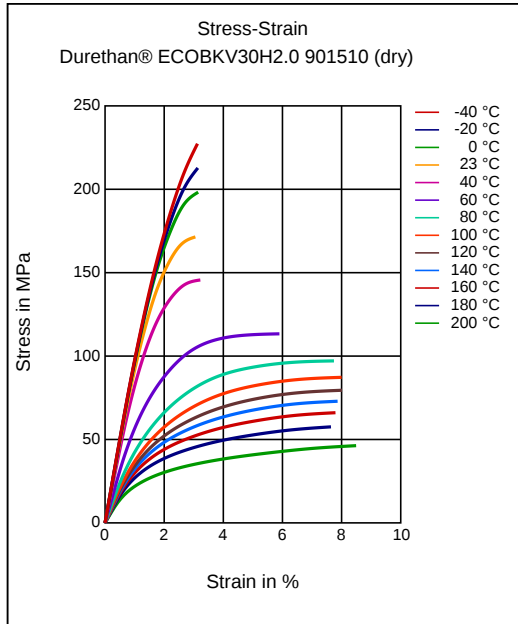


Stress-strain

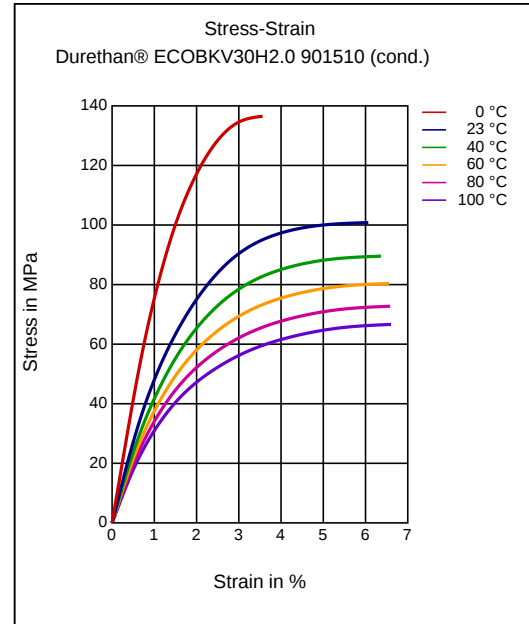

Secant modulus-strain

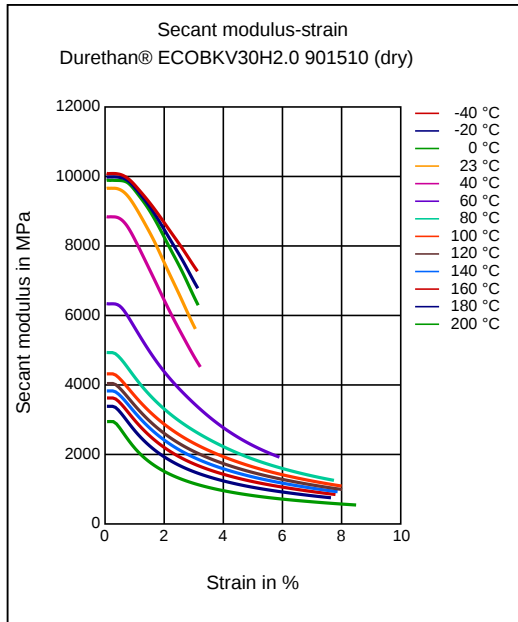


Secant modulus-strain

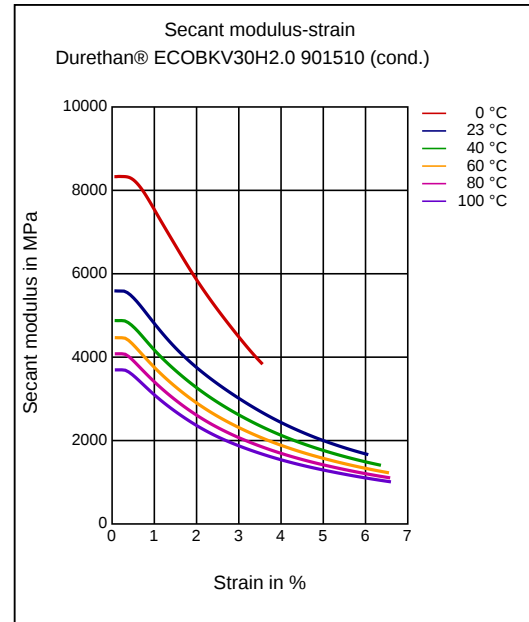


Durethan® ECOBKV30H2.0 901510
PA6-GF30

Envalior


Stress-strain (isochronous) 23°C

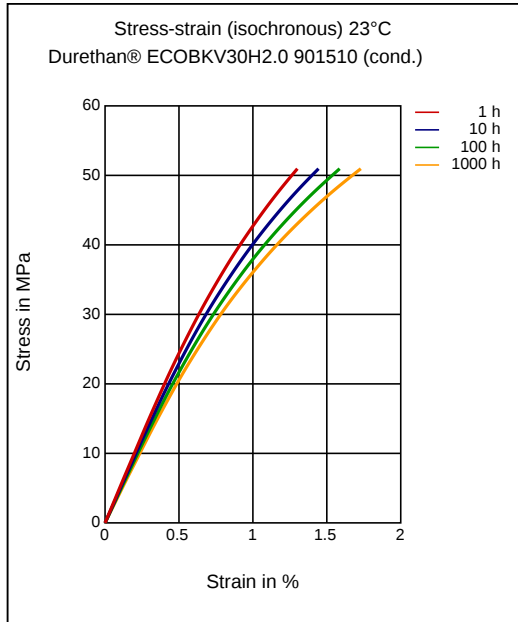


Creep modulus-time 23°C

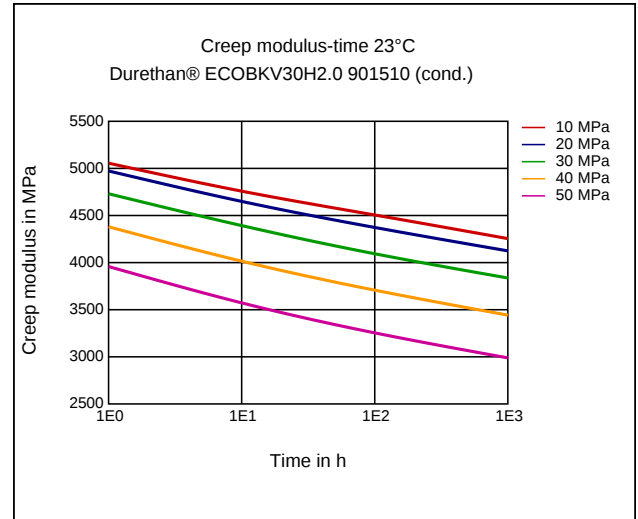

Stress-strain (isochronous) 90°C

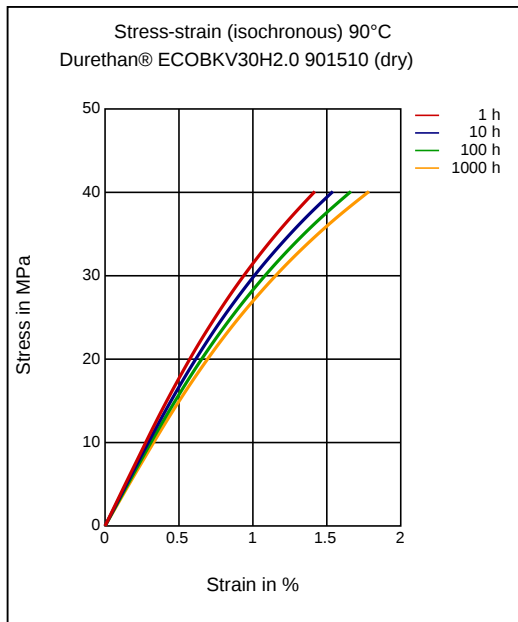


Creep modulus-time 90°C

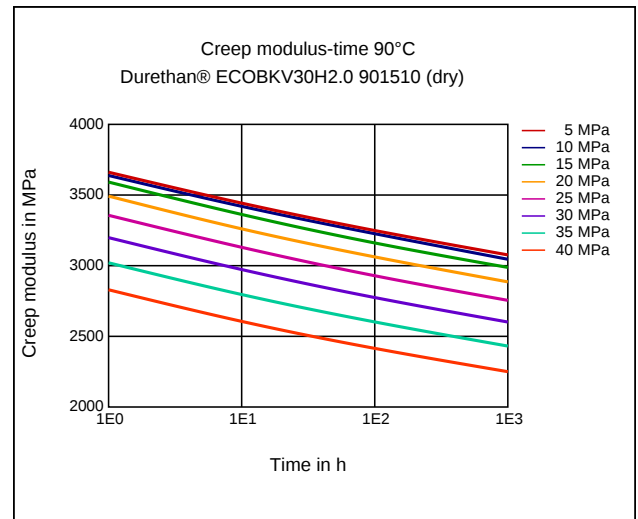


Durethan® ECOBKV30H2.0 901510
PA6-GF30

Envalior


Stress-strain (isochronous) 120°C

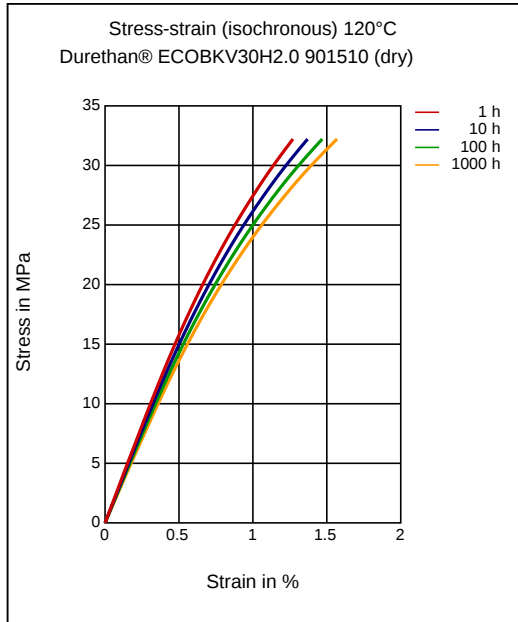


Creep modulus-time 120°C

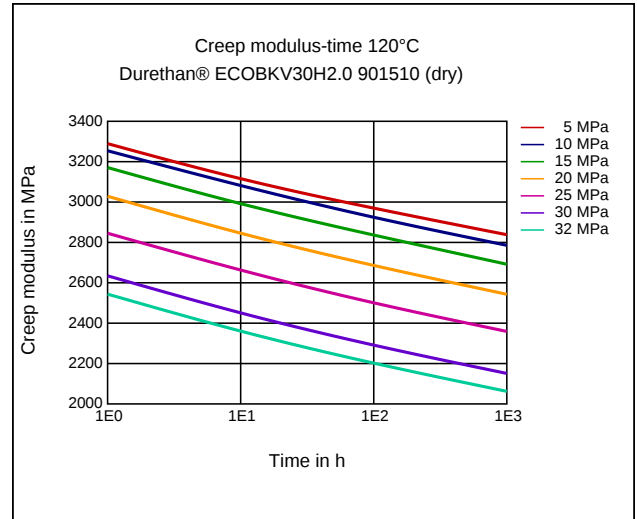

Stress-strain (isochronous) 120°C

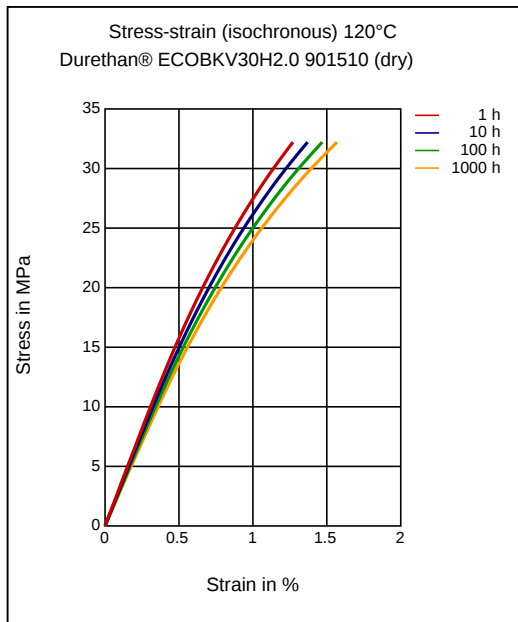


Creep modulus-time 120°C

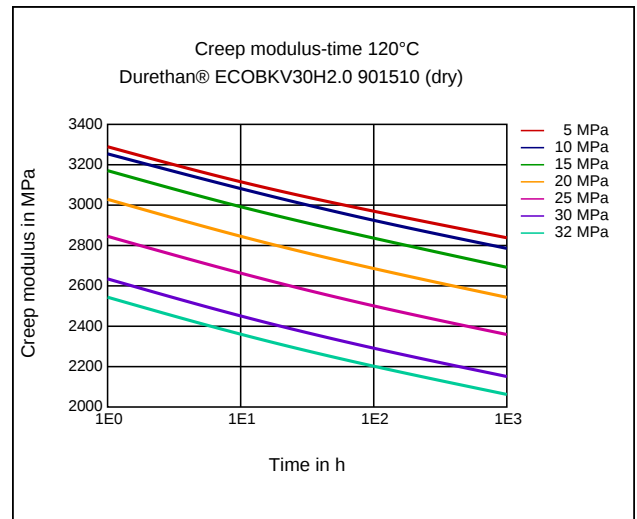

Durethan® ECOBKV30H2.0 901510 PA6-GF30

Envalior

Specific volume-temperature (pvT)

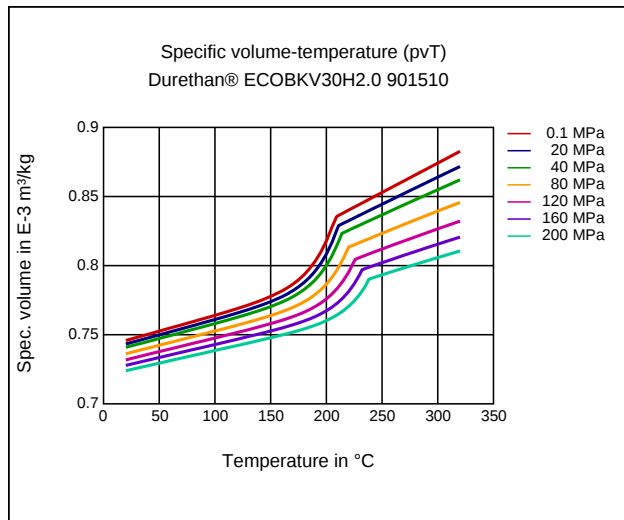

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Special Characteristics

Heat aging stabilized

Features

Thermal Stability

Certifications

Recycled Resin Content, ISCC Plus

Injection Molding

PREPROCESSING

Residual moisture content: 0.03 - 0.12%

Drying temperature dry air dryer: 80 °C

Drying time dry air dryer 2 - 6 h

PROCESSING

Melt temperature (Tmin - Tmax): 270 - 290 °C

Mold temperature: 80 - 120 °C