

Durethan® ECOBKV40H2.0 901510
PA6-GF40

Envalior

Injection Molding, 40% Glass Reinforced, Heat Stabilized, Recycled Content

ISO 1043 PA6-GF40

Mechanical Properties	dry / cond	Unit	Test Standard
ISO Data			
Tensile Modulus	12700 / 7800	MPa	ISO 527
Stress at Break	195 / 130	MPa	ISO 527
Strain at Break	3 / 6	%	ISO 527
Impact Strength (Charpy), +23°C	95 / 90	kJ/m ²	ISO 179/1eU
Impact Strength (Charpy), -30°C	85 / 70	kJ/m ²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	15 / 20	kJ/m ²	ISO 179/1eA

Thermal Properties	dry / cond	Unit	Test Standard
ISO Data			
Melting Temperature (10°C/min)	222 / *	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	200 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	215 / *	°C	ISO 75-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	HB / *	class	UL 94
Thickness tested	1.5 / *	mm	-

Electrical Properties	dry / cond	Unit	Test Standard
ISO Data			
Relative permittivity, 100Hz	4 / 10	-	IEC 62631-2-1
Relative permittivity, 1MHz	4 / 5	-	IEC 62631-2-1
Dissipation Factor, 100Hz	50 / 2500	E-4	IEC 62631-2-1
Dissipation Factor, 1MHz	150 / 1200	E-4	IEC 62631-2-1
Volume Resistivity	1E13 / 1E9	Ohm*m	IEC 62631-3-1
Surface Resistivity	* / 1E10	Ohm	IEC 62631-3-2
Electric Strength	40 / 35	kV/mm	IEC 60243-1
Comparative tracking index	400 / -	-	IEC 60112

Other Properties	dry / cond	Unit	Test Standard
ISO Data			
Water Absorption	6 / *	%	Sim. to ISO 62
Humidity absorption	1.8 / *	%	Sim. to ISO 62
Density	1460 / -	kg/m ³	ISO 1183

Material Specific Properties	dry / cond	Unit	Test Standard
ISO Data			
Viscosity number	140 / *	cm ³ /g	ISO 307, 1157, 1628


Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	280	°C	ISO 294
Injection Molding, mold temperature	80	°C	ISO 294

Durethan® ECOBKV40H2.0 901510
PA6-GF40


Envalior

Diagrams


Stress-strain

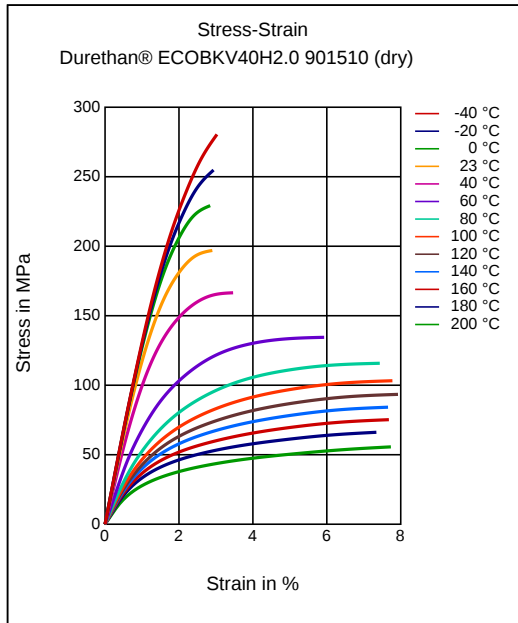


Stress-strain

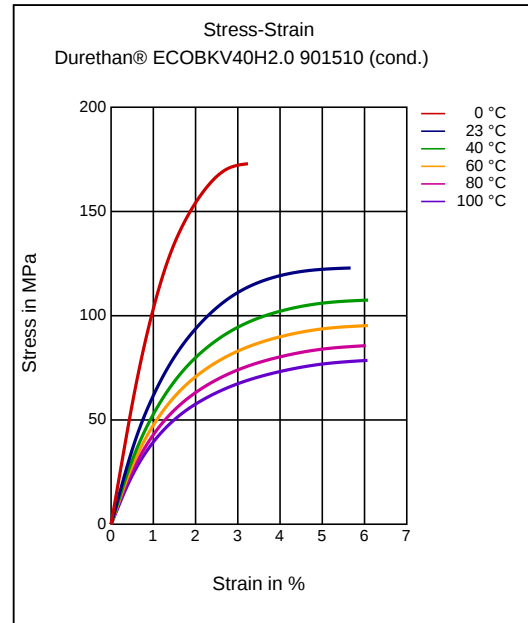

Secant modulus-strain

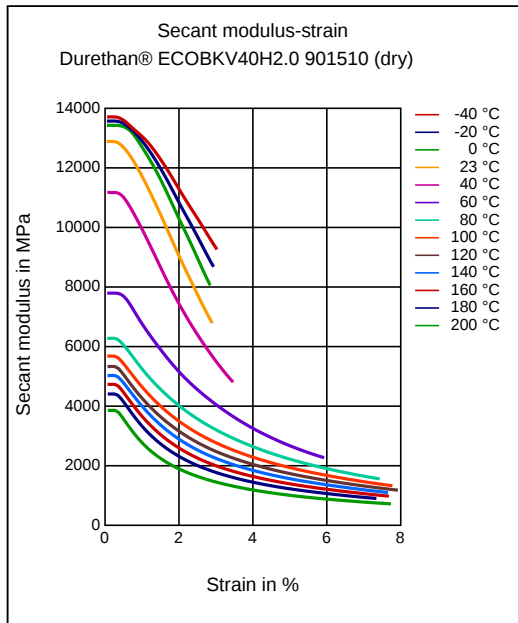

Secant modulus-strain

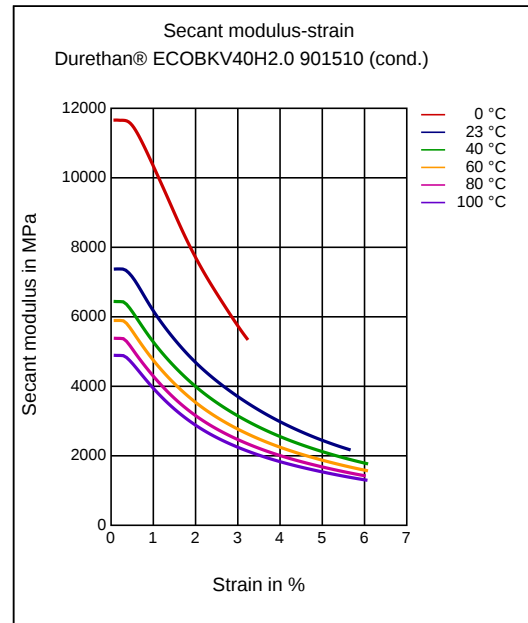

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Injection Molding

PREPROCESSING

Special Characteristics

Heat aging stabilized

Certifications

Recycled Resin Content

Durethan® ECOBKV40H2.0 901510
PA6-GF40

Envalior

Residual moisture content: 0.03 - 0.12%

Drying temperature dry air dryer: 80 °C

Drying time dry air dryer 2 - 6 h

PROCESSING

Melt temperature (Tmin - Tmax): 270 - 290 °C

Mold temperature: 80 - 120 °C
