

Ultramid® B3EG6

PA6-GF30

BASF

A glass fibre reinforced injection moulding grade for industrial articles and electrical insulating parts.

Rheological properties	dry / cond	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	35 / *	cm ³ /10min	ISO 1133
Temperature	275 / *	°C	-
Load	5 / *	kg	-
Molding shrinkage, parallel	0.2 / *	%	ISO 294-4, 2577
Molding shrinkage, normal	0.7 / *	%	ISO 294-4, 2577

Mechanical Properties	dry / cond	Unit	Test Standard
ISO Data			
Tensile Modulus	9500 / 6200	MPa	ISO 527
Stress at Break	185 / 115	MPa	ISO 527
Strain at Break	3.5 / 8	%	ISO 527
Impact Strength (Charpy), +23°C	95 / 110	kJ/m ²	ISO 179/1eU
Impact Strength (Charpy), -30°C	80 / -	kJ/m ²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	15 / 30	kJ/m ²	ISO 179/1eA
Notched Impact Strength (Charpy), -30°C	11 / -	kJ/m ²	ISO 179/1eA

Thermal Properties	dry / cond	Unit	Test Standard
ISO Data			
Melting Temperature (10°C/min)	220 / *	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	210 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	220 / *	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	220 / *	°C	ISO 306
Coeff. of Linear Therm. Expansion, parallel	22 / *	E-6/K	ISO 11359-1/-2
Coeff. of Linear Therm. Expansion, normal	106 / *	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	HB / *	class	UL 94
Thickness tested	1.6 / *	mm	-
UL recognition	yes / *	-	-
Oxygen index	22.5 / *	%	ISO 4589-1/-2

Electrical Properties	dry / cond	Unit	Test Standard
ISO Data			
Relative permittivity, 1MHz	3.8 / 6.8	-	IEC 62631-2-1
Dissipation Factor, 100Hz	230 / 2200	E-4	IEC 62631-2-1
Dissipation Factor, 1MHz	230 / 2200	E-4	IEC 62631-2-1
Volume Resistivity	1E13 / 1E10	Ohm*m	IEC 62631-3-1
Surface Resistivity	* / 1E10	Ohm	IEC 62631-3-2
Electric Strength	39 / 35	kV/mm	IEC 60243-1
Comparative tracking index	- / 575	-	IEC 60112

Other Properties	dry / cond	Unit	Test Standard
ISO Data			
Water Absorption	6.6 / *	%	Sim. to ISO 62
Humidity absorption	2.1 / *	%	Sim. to ISO 62
Density	1360 / -	kg/m ³	ISO 1183

Material Specific Properties	dry / cond	Unit	Test Standard
ISO Data			
Viscosity number	140 / *	cm ³ /g	ISO 307, 1157, 1628


Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	80	°C	-
Pre-drying - Time	4	h	-
Processing humidity	≤0.15	%	-
Melt temperature	270 - 290	°C	-
Mold temperature	80 - 90	°C	-

Ultramid® B3EG6
PA6-GF30


BASF

Diagrams


Viscosity-shear rate

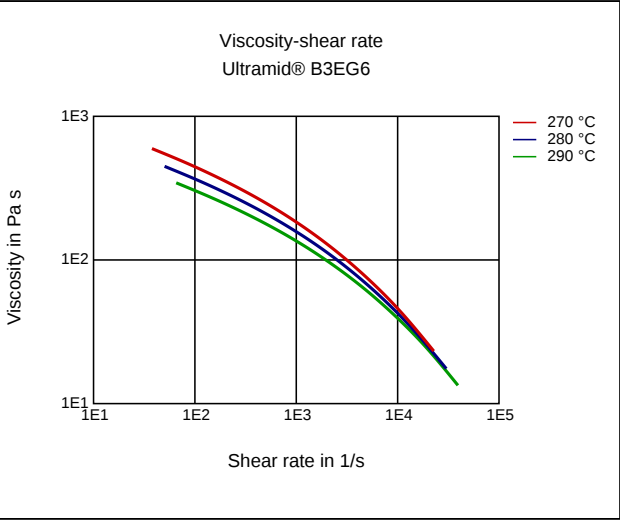


Shearstress-shear rate

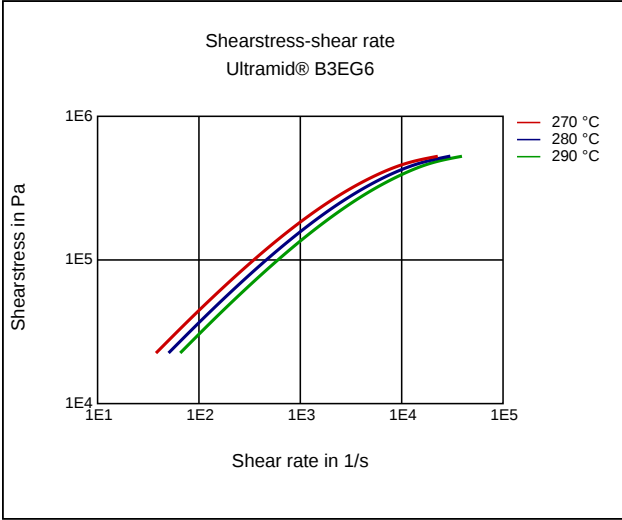

Dynamic Shear modulus-temperature

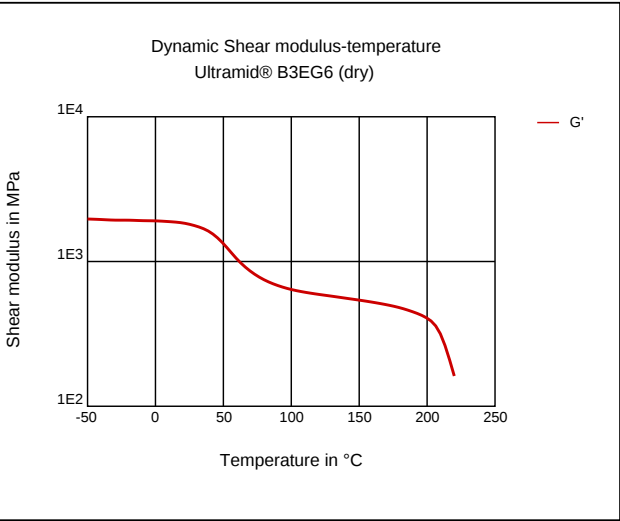


Dynamic Shear modulus-temperature

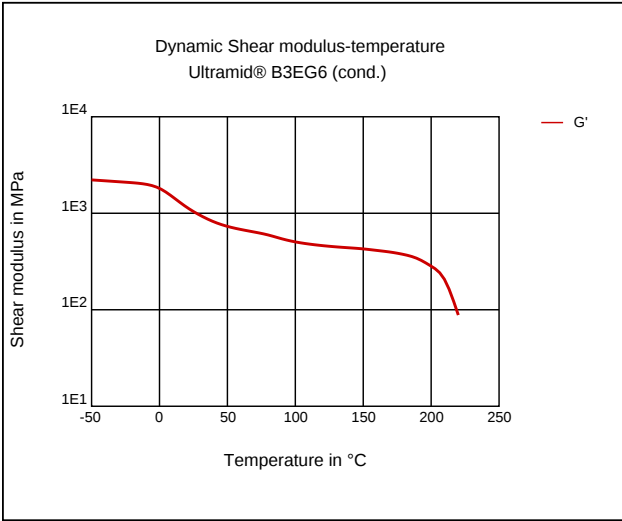


Ultramid® B3EG6
PA6-GF30

BASF


Stress-strain

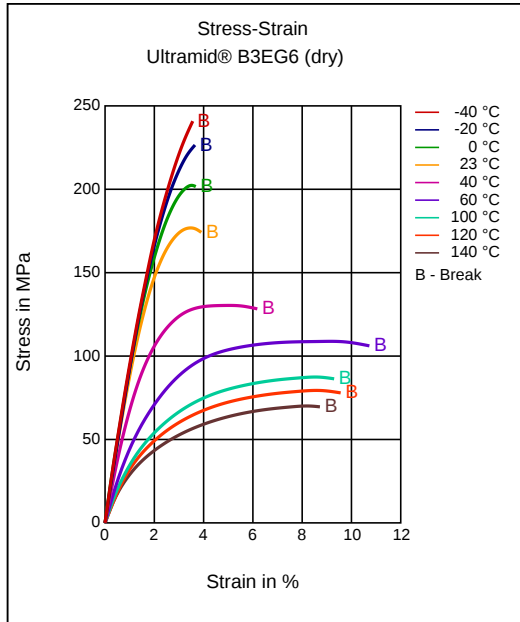


Stress-strain

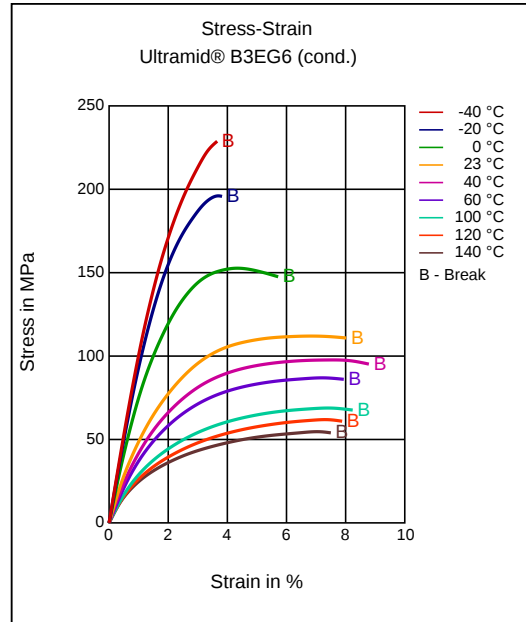

Secant modulus-strain

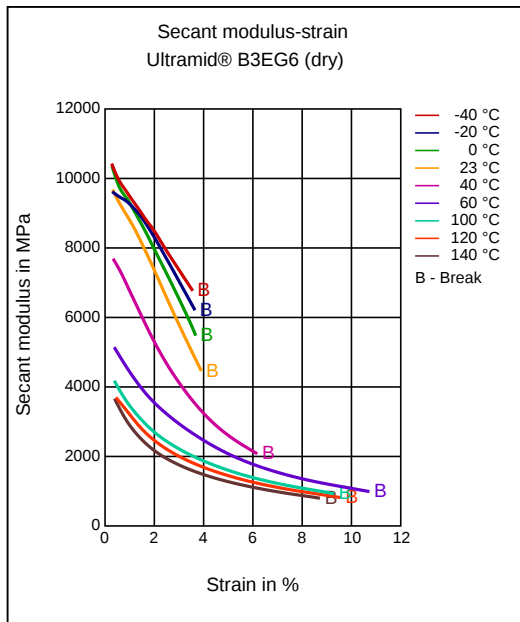


Secant modulus-strain

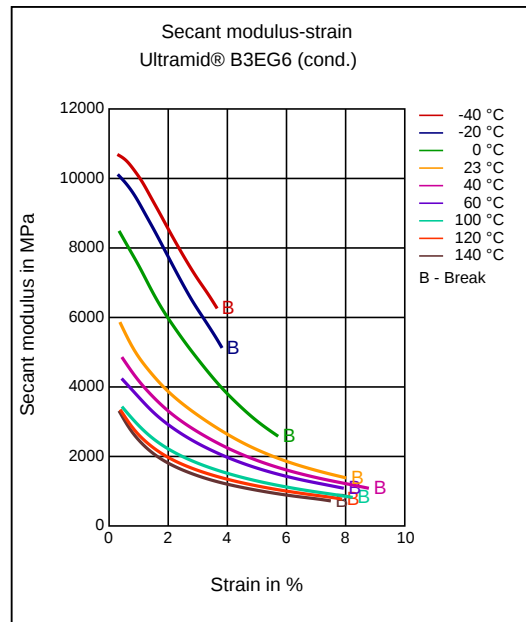


Ultramid® B3EG6
PA6-GF30

BASF


Stress-strain (isochronous) 23°C

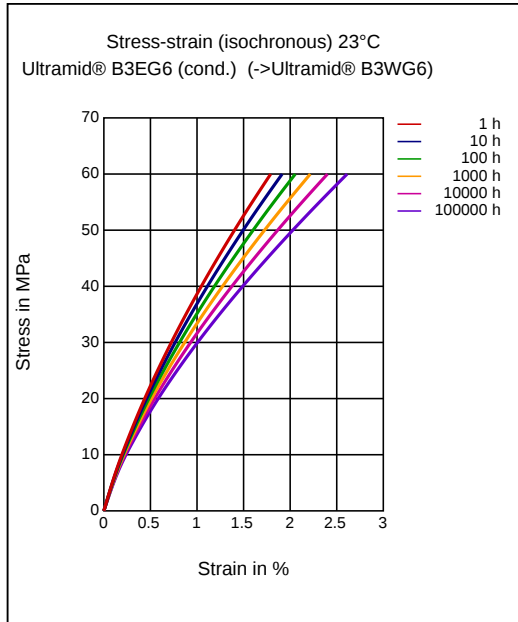


Creep modulus-time 23°C

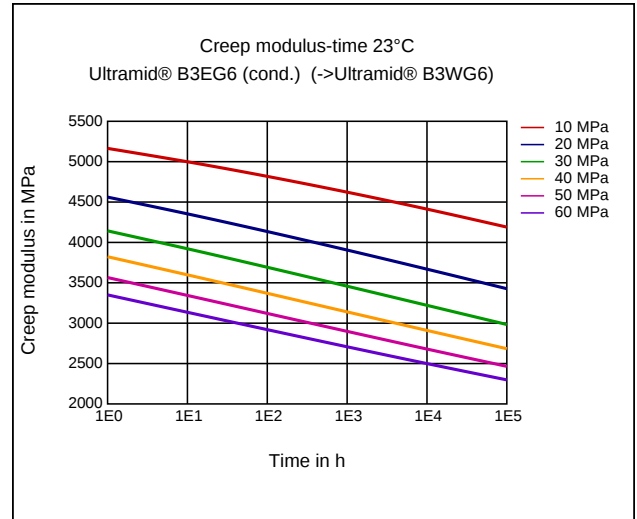

Stress-strain (isochronous) 90°C

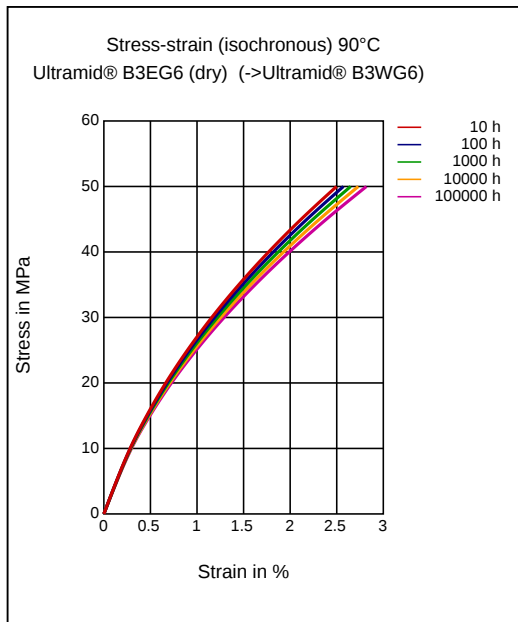


Creep modulus-time 90°C

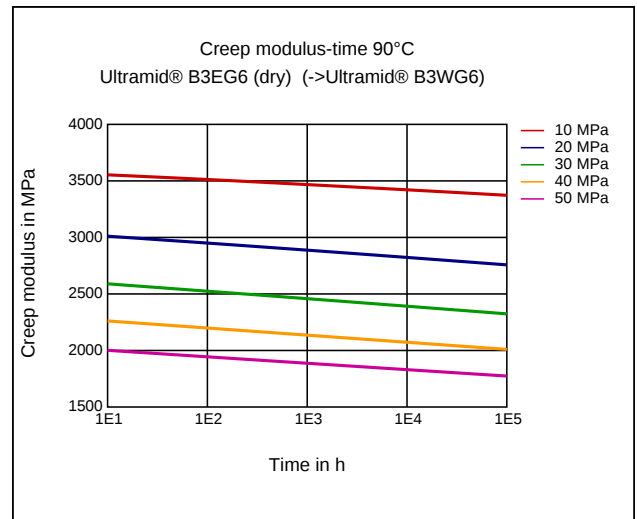


Ultramid® B3EG6
PA6-GF30

BASF


Stress-strain (isochronous) 120°C

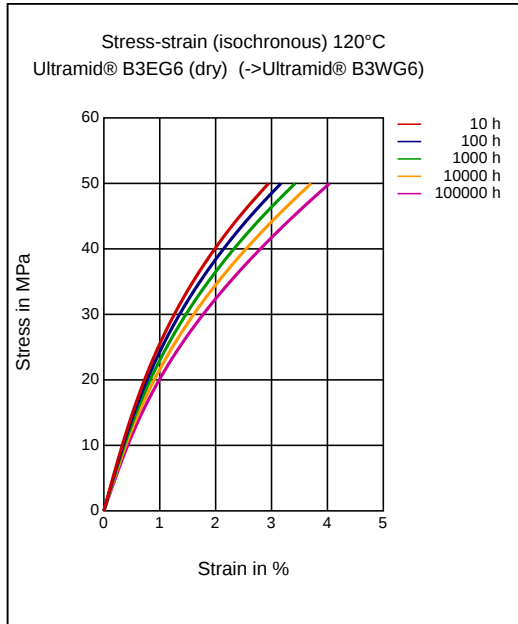


Creep modulus-time 120°C

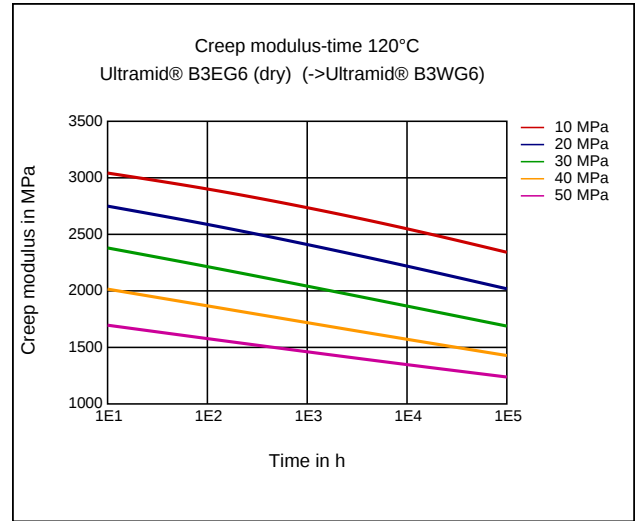

Specific volume-temperature (pvT)

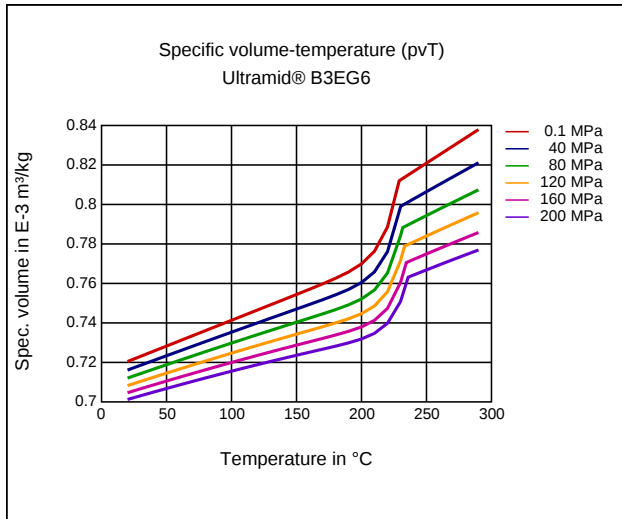


Tensile Modulus-Temperature

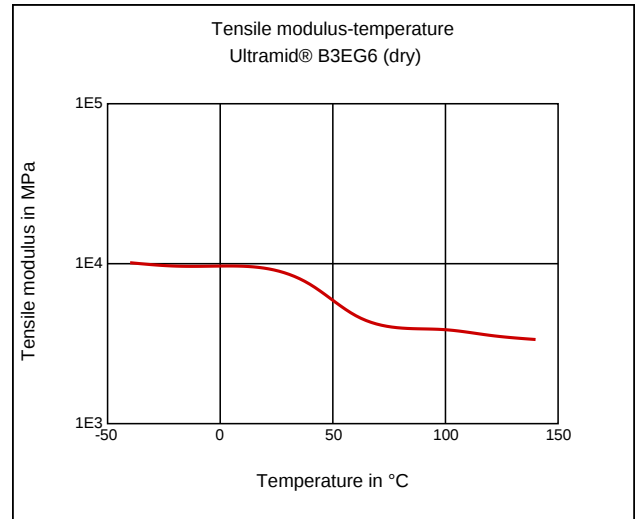


Ultramid® B3EG6 PA6-GF30

BASF

Tensile Modulus-Temperature

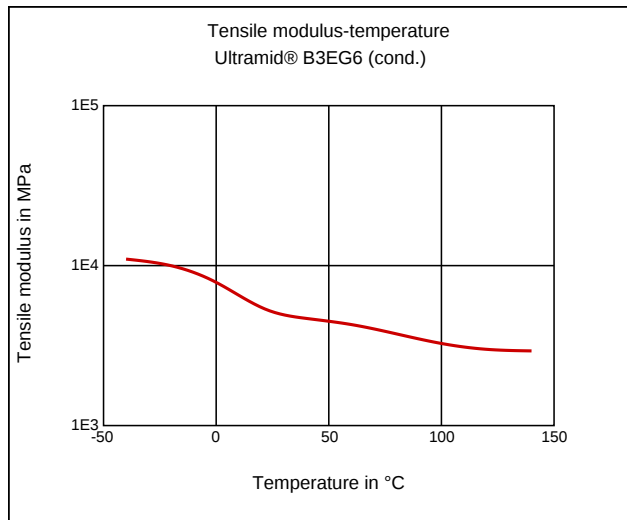

Coeff. of linear thermal expansion, normal

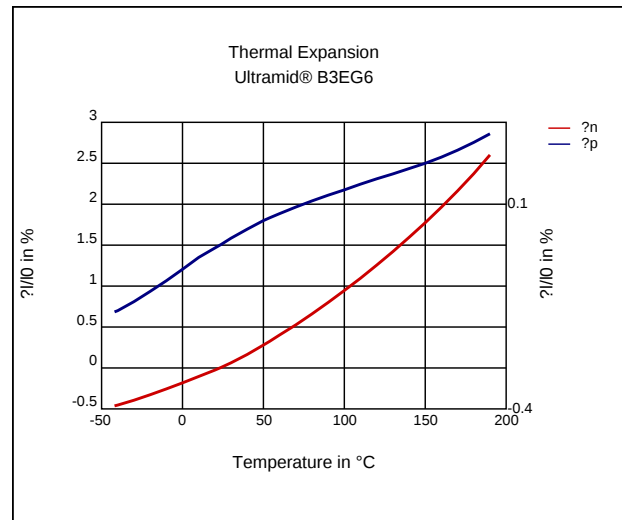

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Additives

Lubricants, Release agent

Special Characteristics

Heat aging stabilized

Injection Molding

PREPROCESSING

Pre/Post-processing, max. allowed water content: .15 %

Pre/Post-processing, Pre-drying, Temperature: 80 °C

Pre/Post-processing, Pre-drying, Time: 4 h

PROCESSING

injection molding, Melt temperature, range: 270 - 290 °C

injection molding, Melt temperature, recommended: 280 °C

injection molding, Mold temperature, range: 80 - 90 °C

injection molding, Mold temperature, recommended: 80 °C

injection molding, Dwell time, thermoplastics: 10 min

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23 °C)
- ✓ Citric Acid solution (10% by mass) (23 °C)
- ✓ Lactic Acid (10% by mass) (23 °C)
- ✗ Hydrochloric Acid (36% by mass) (23 °C)
- ✗ Nitric Acid (40% by mass) (23 °C)
- ✗ Sulfuric Acid (38% by mass) (23 °C)
- ✗ Sulfuric Acid (5% by mass) (23 °C)
- ✗ Chromic Acid solution (40% by mass) (23 °C)

Bases

- ✗ Sodium Hydroxide solution (35% by mass) (23 °C)
- ✓ Sodium Hydroxide solution (1% by mass) (23 °C)

Alcohols

Ultramid® B3EG6
PA6-GF30

BASF

- ✓ Isopropyl alcohol (23°C)
- ✓ Methanol (23°C)
- ✓ Ethanol (23°C)

Hydrocarbons

- ✓ n-Hexane (23°C)
- ✓ Toluene (23°C)
- ✓ iso-Octane (23°C)

Ketones

- ✓ Acetone (23°C)

Ethers

- ✓ Diethyl ether (23°C)

Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23°C)
- ✓ SAE 10W40 multigrade motor oil (130°C)

Standard Fuels

- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✗ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✗ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✗ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Ethyl Acetate (23°C)
 - ✗ Hydrogen peroxide (23°C)
 - ✗ DOT No. 4 Brake fluid (130°C)
 - ✗ Ethylene Glycol (50% by mass) in water (108°C)
 - ✓ Water (23°C)
-