

Ultramid® B3K

PA6

BASF

An easy flowing, stabilized injection moulding grade for fast processing. Uses include technical parts with wall thicknesses > 2 mm (eg machinery components, fans, housings of hand-held power tools).

Rheological properties	dry / cond	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	160 / *	cm³/10min	ISO 1133
Temperature	275 / *	°C	-
Load	5 / *	kg	-
Molding shrinkage, parallel	0.8 / *	%	ISO 294-4, 2577
Molding shrinkage, normal	0.8 / *	%	ISO 294-4, 2577

Mechanical Properties	dry / cond	Unit	Test Standard
ISO Data			
Tensile Modulus	3100 / 1000	MPa	ISO 527
Yield stress	85 / 40	MPa	ISO 527
Yield strain	4 / 20	%	ISO 527
Nominal strain at break	24 / >50	%	ISO 527
Tensile Creep Modulus, 1h	* / 900	MPa	ISO 899-1
Tensile Creep Modulus, 1000h	* / 700	MPa	ISO 899-1
Impact Strength (Charpy), +23°C	no break / no break	kJ/m²	ISO 179/1eU
Impact Strength (Charpy), -30°C	100 / -	kJ/m²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	5.5 / 60	kJ/m²	ISO 179/1eA
Notched Impact Strength (Charpy), -30°C	4 / -	kJ/m²	ISO 179/1eA

Thermal Properties	dry / cond	Unit	Test Standard
ISO Data			
Melting Temperature (10°C/min)	220 / *	°C	ISO 11357-1/-3
Glass Transition Temperature (10°C/min)	60 / *	°C	ISO 11357-1/-2
Temp. of deflection under load (1.80 MPa)	60 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	180 / *	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	204 / *	°C	ISO 306
Coeff. of Linear Therm. Expansion, parallel	102 / *	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	HB / *	class	UL 94
Thickness tested	1.5 / *	mm	-
UL recognition	yes / *	-	-
Burning Behav. at thickness h	V-2 / *	class	UL 94
Thickness tested	3.0 / *	mm	-
UL recognition	yes / *	-	-
Oxygen index	26 / *	%	ISO 4589-1/-2

Electrical Properties	dry / cond	Unit	Test Standard
ISO Data			
Relative permittivity, 100Hz	4 / -	-	IEC 62631-2-1
Relative permittivity, 1MHz	3.5 / 7	-	IEC 62631-2-1
Dissipation Factor, 100Hz	100 / -	E-4	IEC 62631-2-1
Dissipation Factor, 1MHz	230 / 3000	E-4	IEC 62631-2-1
Volume Resistivity	1E13 / 1E10	Ohm*m	IEC 62631-3-1
Surface Resistivity	* / 1E10	Ohm	IEC 62631-3-2
Comparative tracking index	- / 600	-	IEC 60112

Other Properties	dry / cond	Unit	Test Standard
ISO Data			
Water Absorption	9.5 / *	%	Sim. to ISO 62
Humidity absorption	3 / *	%	Sim. to ISO 62
Density	1130 / -	kg/m³	ISO 1183

Material Specific Properties	dry / cond	Unit	Test Standard
ISO Data			
Viscosity number	150 / *	cm³/g	ISO 307, 1157, 1628

Ultramid® B3K

PA6

BASF


Rheological calculation properties	Value	Unit	Test Standard
ISO Data			
Ejection temperature	145	°C	-

Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	250	°C	ISO 294
Injection Molding, mold temperature	80	°C	ISO 294
Injection Molding, injection velocity	200	mm/s	ISO 294


Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	80	°C	-
Pre-drying - Time	4	h	-
Processing humidity	≤0.15	%	-
Melt temperature	250 - 270	°C	-
Mold temperature	40 - 60	°C	-

Diagrams

Viscosity-shear rate

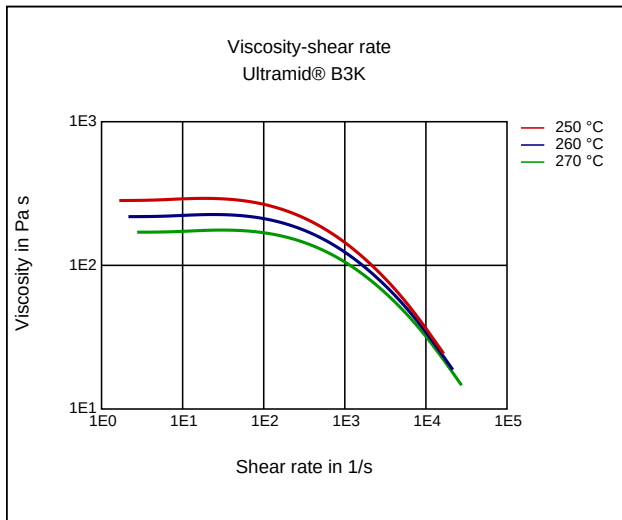


Shearstress-shear rate

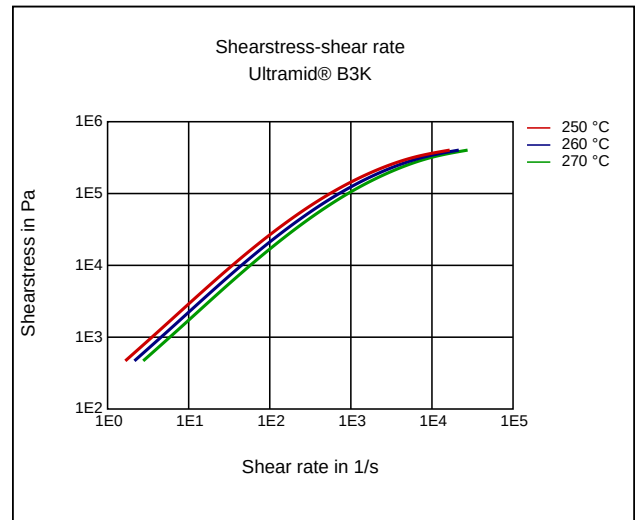


Ultramid® B3K PA6

BASF


Dynamic Shear modulus-temperature

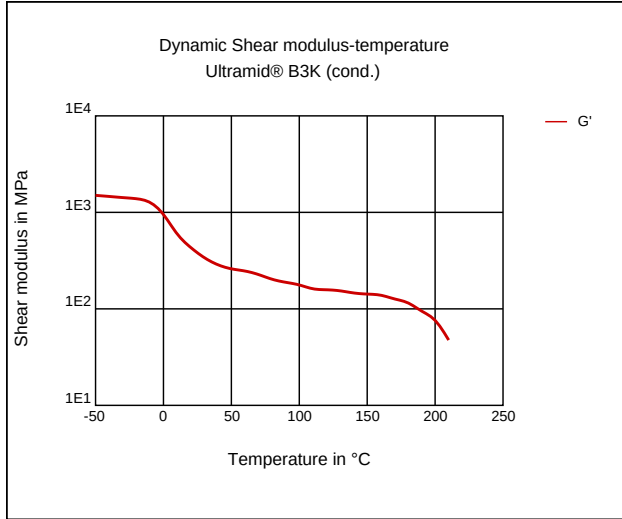


Stress-strain

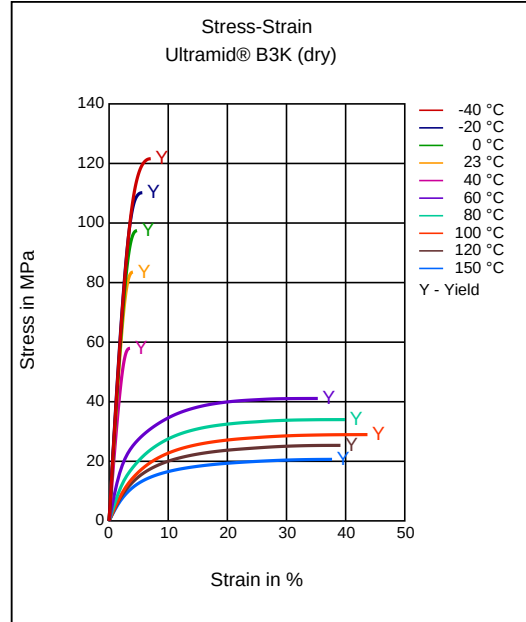

Stress-strain

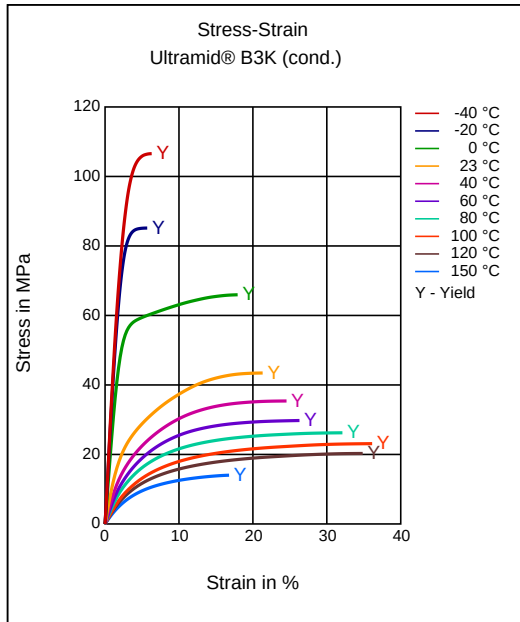


Secant modulus-strain

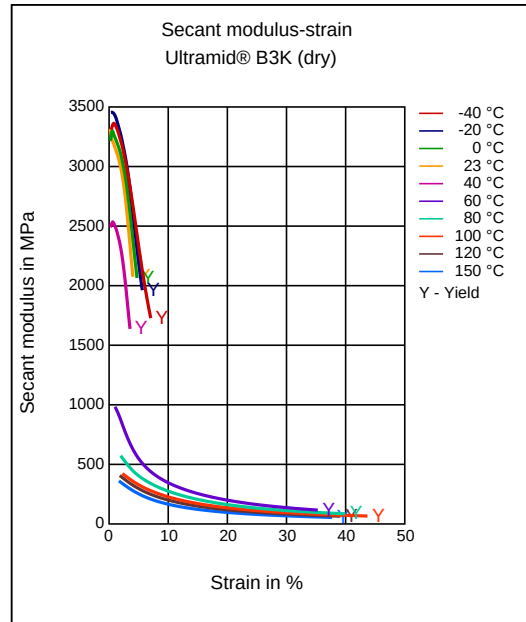


Ultramid® B3K
PA6

BASF


Secant modulus-strain

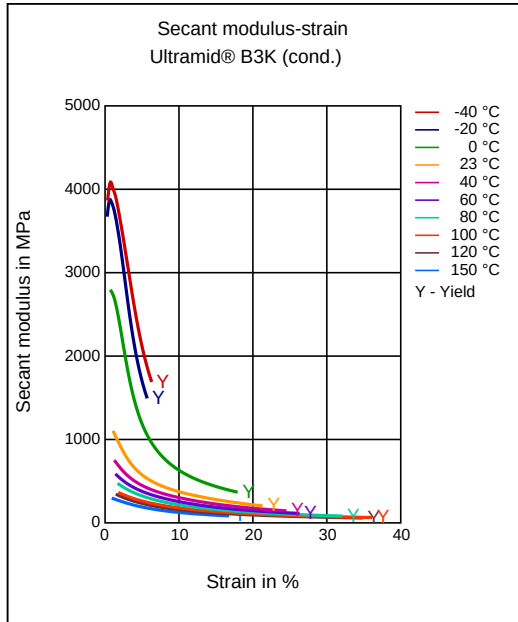


Stress-strain (isochronous) 23 °C

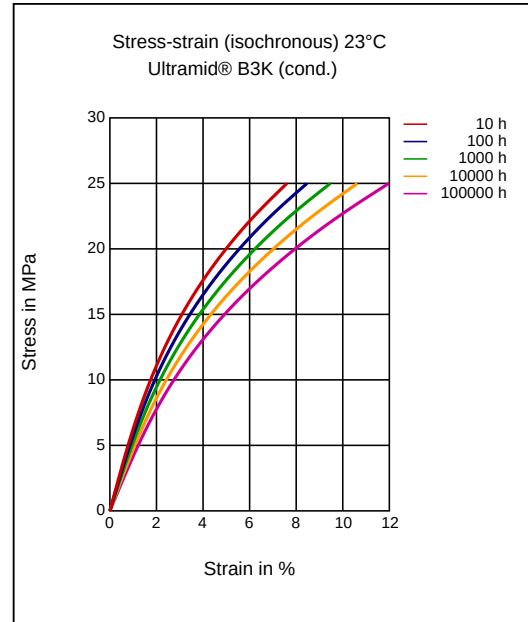

Creep modulus-time 23 °C

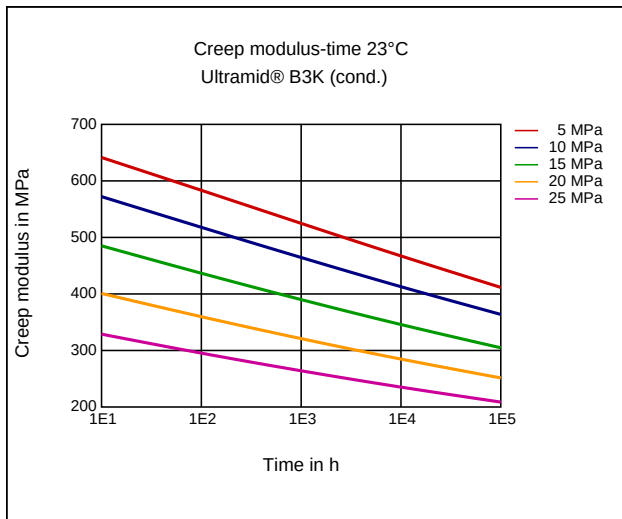


Stress-strain (isochronous) 90 °C

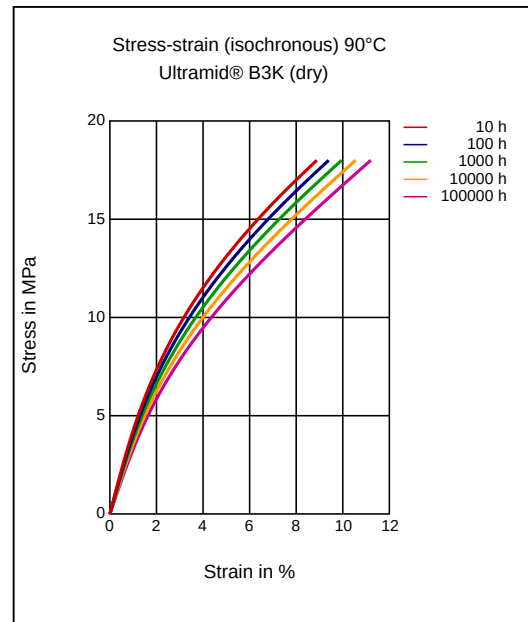


Ultramid® B3K PA6

BASF


Creep modulus-time 90 °C

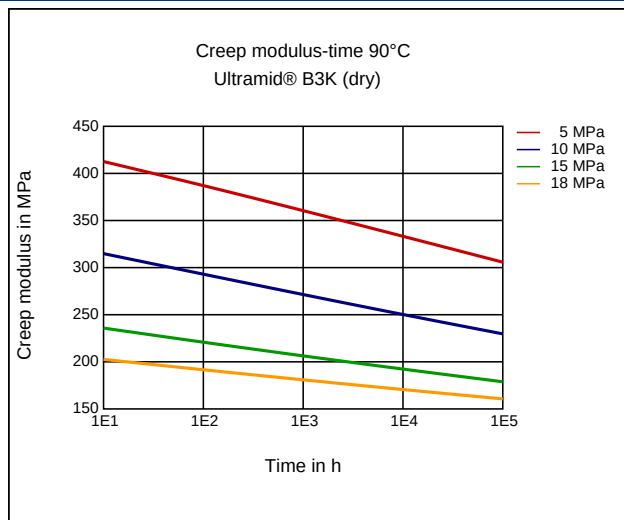


Specific volume-temperature (pvT)

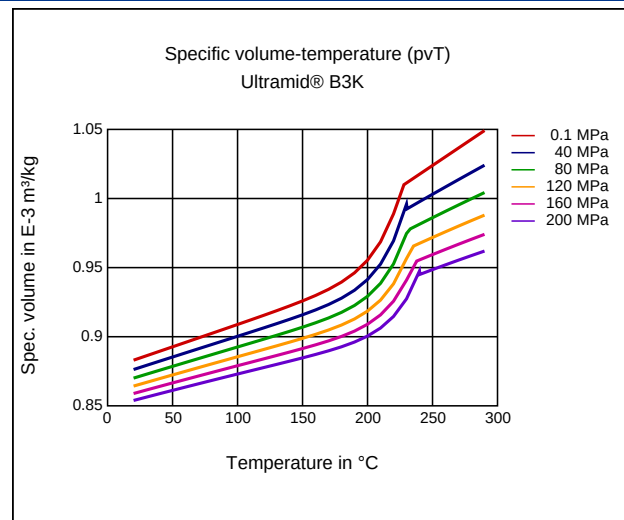

Tensile Modulus-Temperature

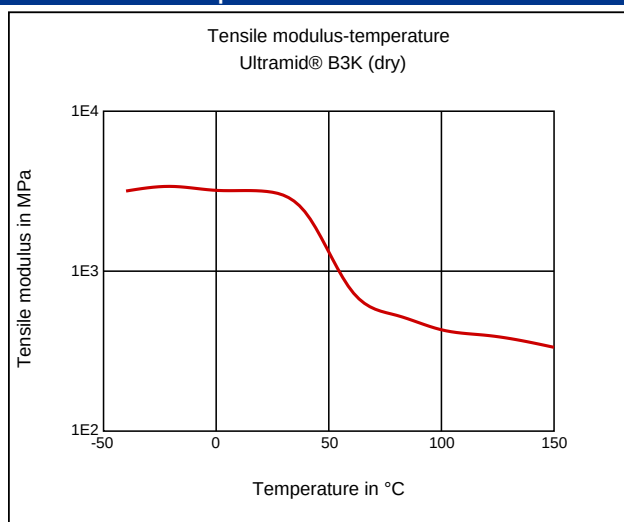

Tensile Modulus-Temperature

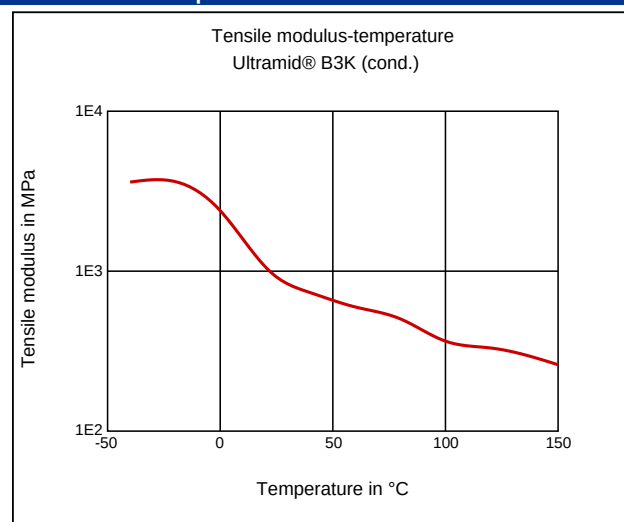

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Additives

Lubricants, Release agent

Special Characteristics

Heat aging stabilized

Injection Molding

PREPROCESSING

Pre/Post-processing, max. allowed water content: .15 %

Pre/Post-processing, Pre-drying, Temperature: 80 °C

Pre/Post-processing, Pre-drying, Time: 4 h

PROCESSING

injection molding, Melt temperature, range: 250 - 270 °C

injection molding, Melt temperature, recommended: 260 °C

injection molding, Mold temperature, range: 40 - 60 °C

injection molding, Mold temperature, recommended: 60 °C

Ultramid® B3K
PA6

BASF

injection molding, Dwell time, thermoplastics: 10 min

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23°C)