

Ultramid® A3ZG6 BK20591

PA66-I-GF30

BASF

An impact-modified, glassfibre reinforced injection moulding grade with good dimensional stability.

Rheological properties	dry / cond	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	15 / *	cm³/10min	ISO 1133
Temperature	275 / *	°C	-
Load	5 / *	kg	-
Molding shrinkage, parallel	0.5 / *	%	ISO 294-4, 2577
Molding shrinkage, normal	0.9 / *	%	ISO 294-4, 2577

Mechanical Properties	dry / cond	Unit	Test Standard
ISO Data			
Tensile Modulus	8500 / 6000	MPa	ISO 527
Stress at Break	140 / 100	MPa	ISO 527
Strain at Break	3.5 / 6	%	ISO 527
Tensile Creep Modulus, 1000h	* / 3000	MPa	ISO 899-1
Impact Strength (Charpy), +23°C	90 / 95	kJ/m²	ISO 179/1eU
Impact Strength (Charpy), -30°C	85 / -	kJ/m²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	19 / 26	kJ/m²	ISO 179/1eA
Notched Impact Strength (Charpy), -30°C	10 / -	kJ/m²	ISO 179/1eA

Thermal Properties	dry / cond	Unit	Test Standard
ISO Data			
Melting Temperature (10°C/min)	260 / *	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	240 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	250 / *	°C	ISO 75-1/-2
Coeff. of Linear Therm. Expansion, parallel	27 / *	E-6/K	ISO 11359-1/-2
Coeff. of Linear Therm. Expansion, normal	128 / *	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	HB / *	class	UL 94
Thickness tested	1.6 / *	mm	-
UL recognition	yes / *	-	-
Burning Behav. at thickness h	HB / *	class	UL 94
Thickness tested	0.8 / *	mm	-
UL recognition	yes / *	-	-

Electrical Properties	dry / cond	Unit	Test Standard
ISO Data			
Relative permittivity, 1MHz	3.5 / 5.5	-	IEC 62631-2-1
Dissipation Factor, 1MHz	140 / 1600	E-4	IEC 62631-2-1
Volume Resistivity	1E13 / 1E10	Ohm*m	IEC 62631-3-1
Surface Resistivity	* / 1E10	Ohm	IEC 62631-3-2
Comparative tracking index	- / 550	-	IEC 60112

Other Properties	dry / cond	Unit	Test Standard
ISO Data			
Water Absorption	5 / *	%	Sim. to ISO 62
Humidity absorption	1.5 / *	%	Sim. to ISO 62
Density	1330 / -	kg/m³	ISO 1183

Material Specific Properties	dry / cond	Unit	Test Standard
ISO Data			
Viscosity number	160 / *	cm³/g	ISO 307, 1157, 1628

Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	290	°C	ISO 294
Injection Molding, mold temperature	80	°C	ISO 294
Injection Molding, injection velocity	200	mm/s	ISO 294

Ultramid® A3ZG6 BK20591


PA66-I-GF30

BASF


Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	80	°C	-
Pre-drying - Time	4	h	-
Processing humidity	≤0.15	%	-
Melt temperature	280 - 300	°C	-
Mold temperature	80 - 90	°C	-

Diagrams


Viscosity-shear rate

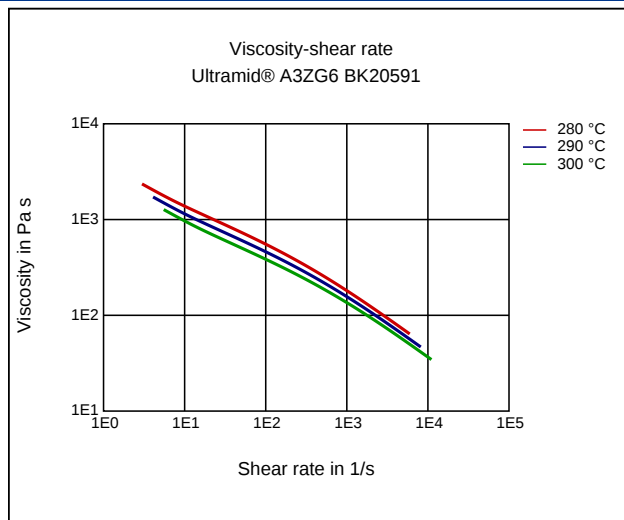


Shearstress-shear rate

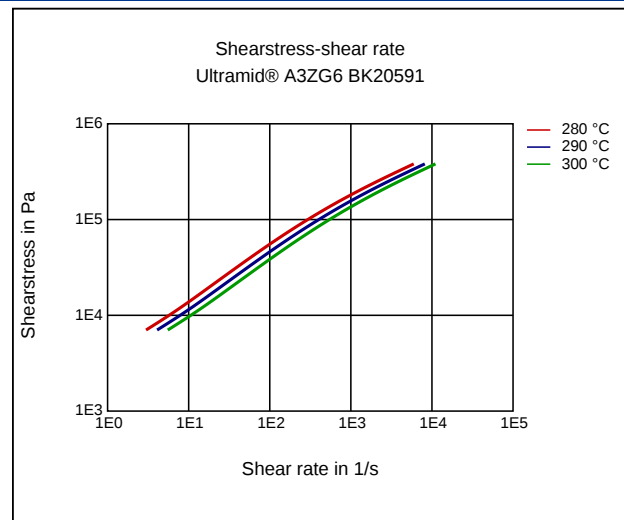

Dynamic Shear modulus-temperature

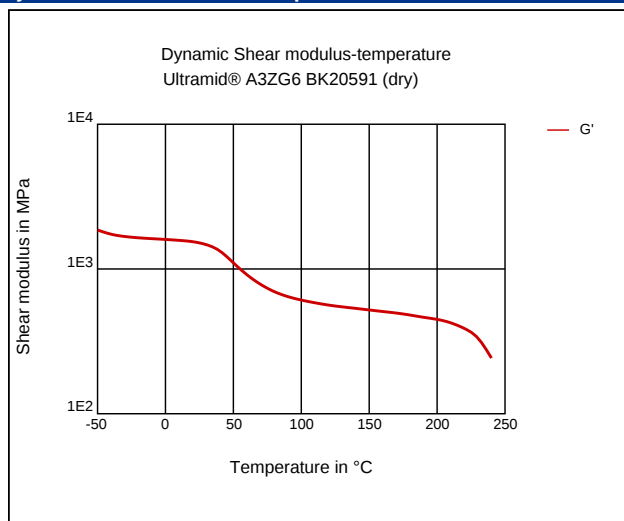


Dynamic Shear modulus-temperature

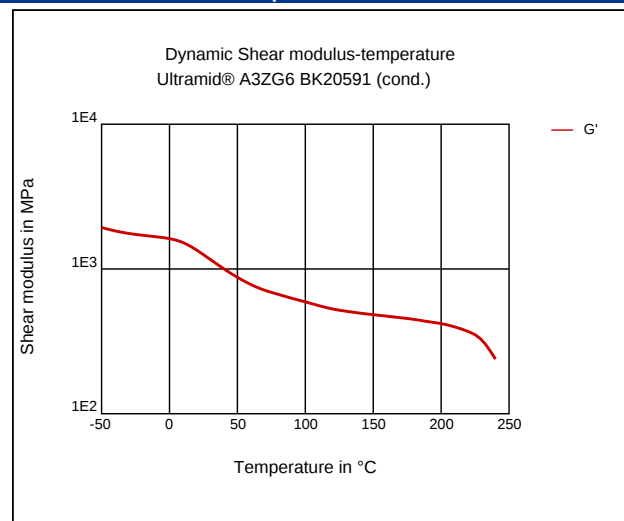


Ultramid® A3ZG6 BK20591
PA66-I-GF30

BASF


Stress-strain

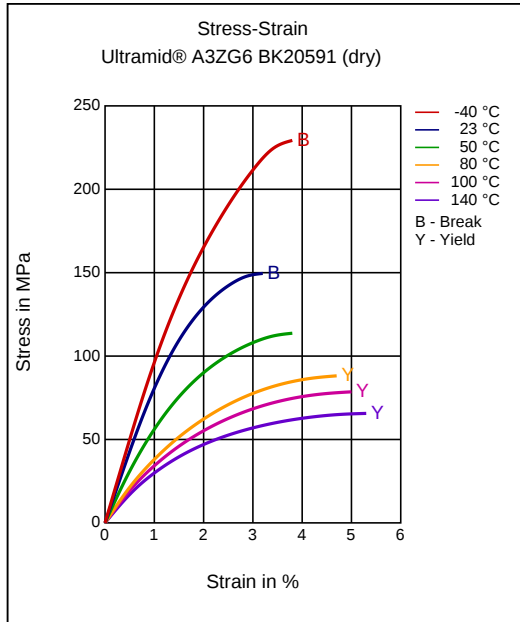


Stress-strain

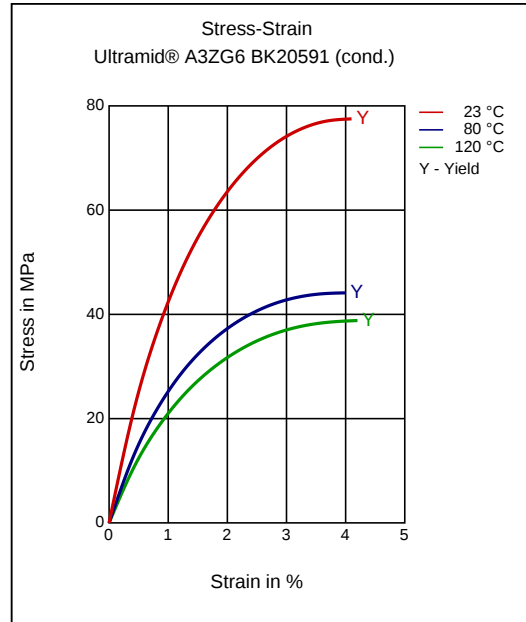

Secant modulus-strain

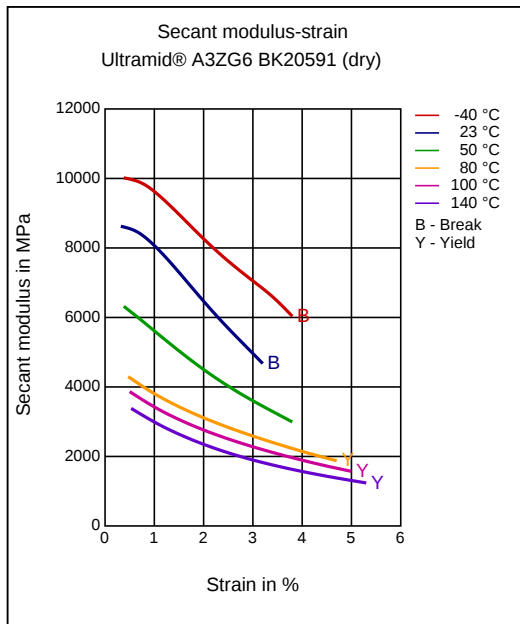


Secant modulus-strain

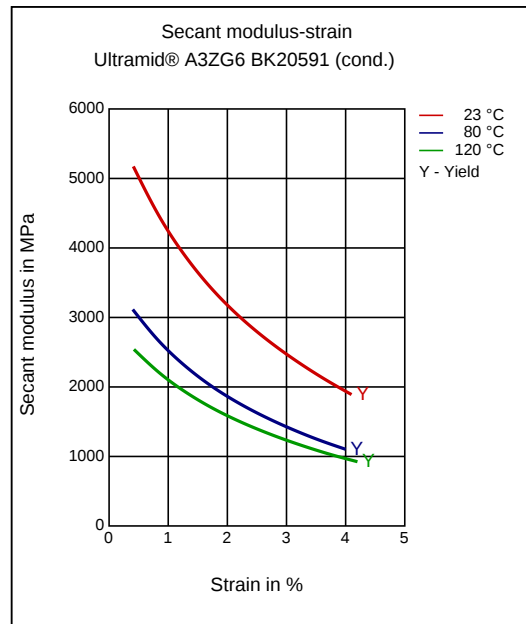


Ultramid® A3ZG6 BK20591
PA66-I-GF30

BASF


Stress-strain (isochronous) 23°C

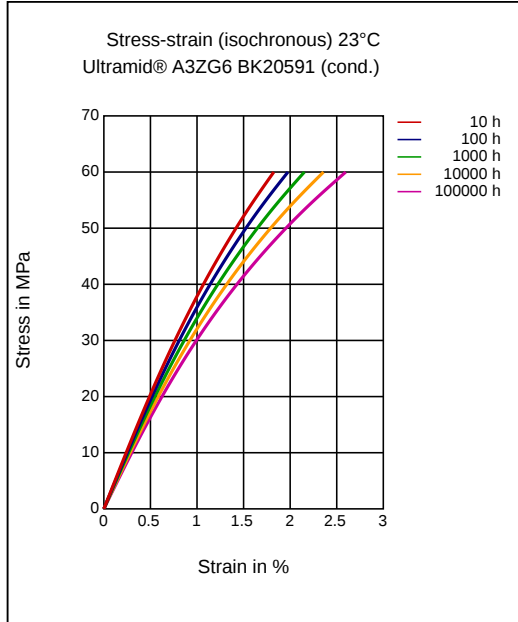


Creep modulus-time 23°C

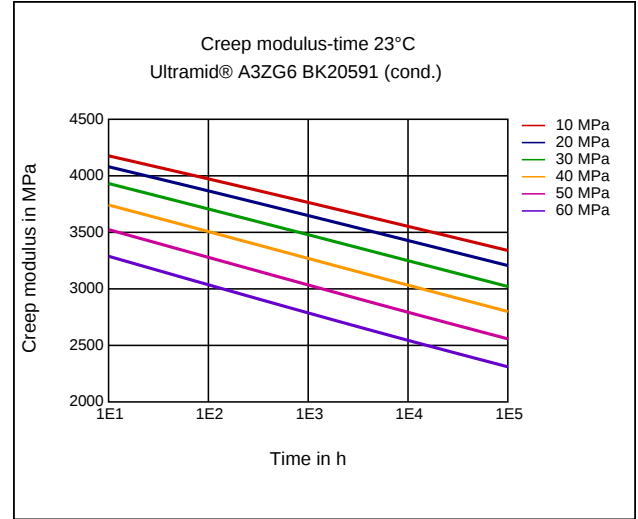

Stress-strain (isochronous) 80°C

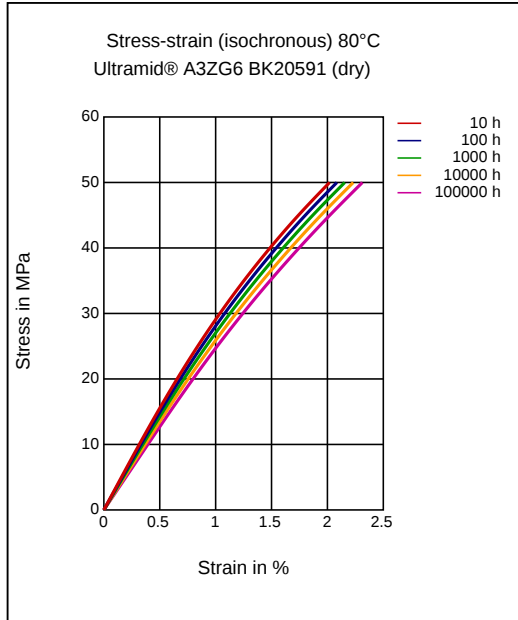


Creep modulus-time 80°C

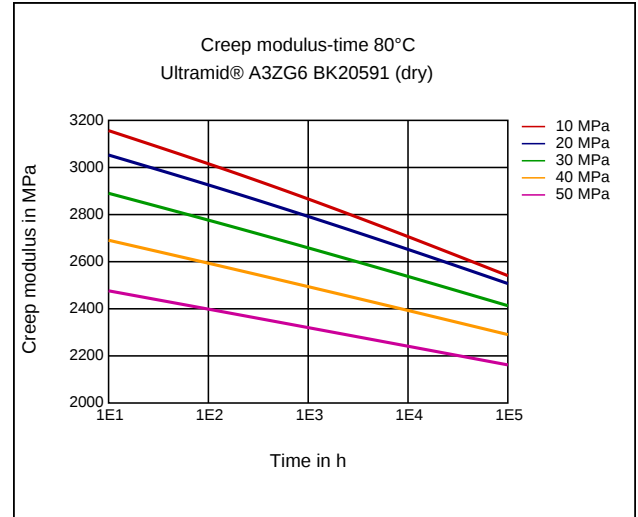


Ultramid® A3ZG6 BK20591
PA66-I-GF30

BASF


Stress-strain (isochronous) 120°C

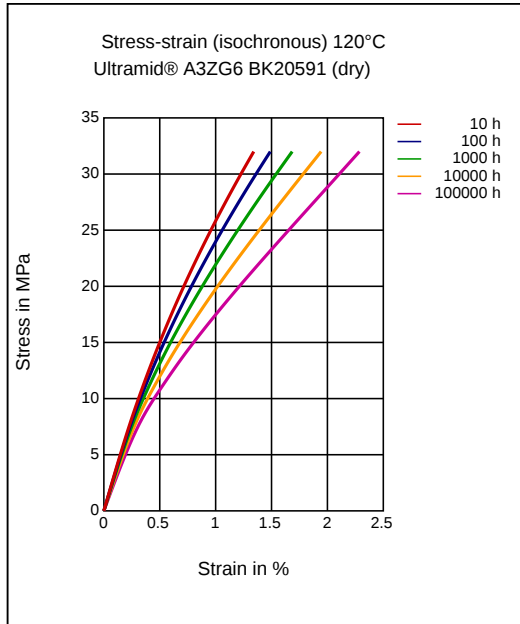


Creep modulus-time 120°C

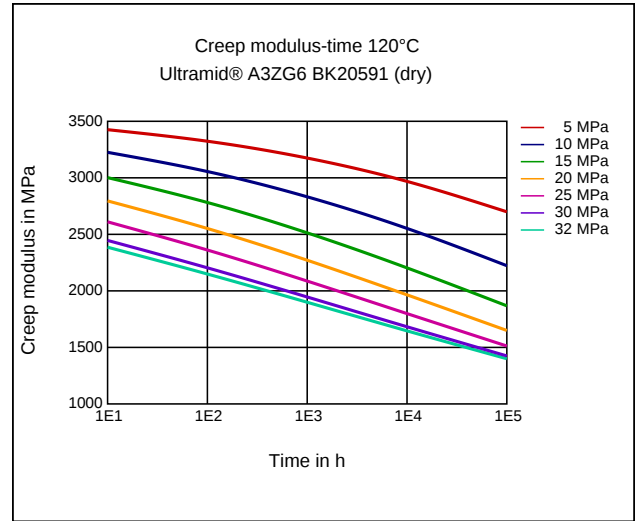

Tensile Modulus-Temperature

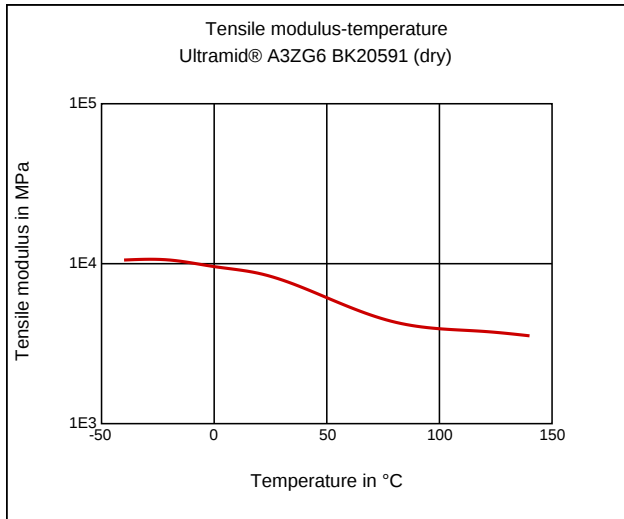

Tensile Modulus-Temperature

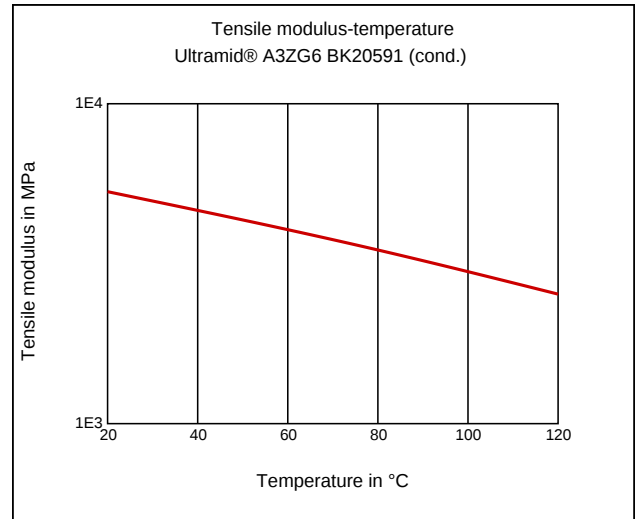


Ultramid® A3ZG6 BK20591

PA66-I-GF30

BASF

Coeff. of linear thermal expansion, normal

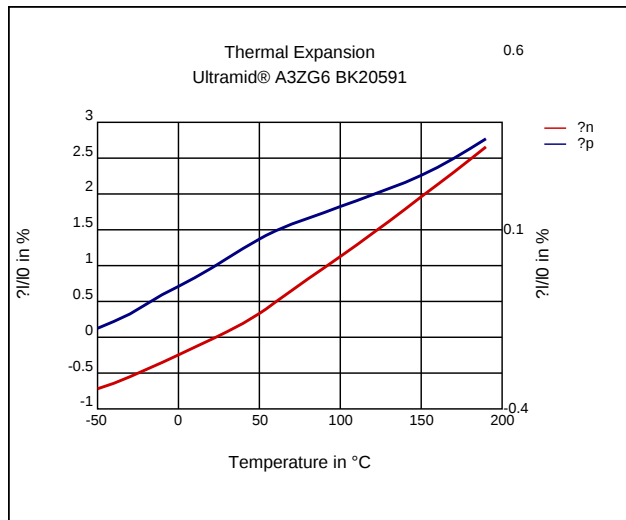

Characteristics

Processing

Injection Molding

Additives

Lubricants, Release agent

Delivery form

Pellets, Black

Special Characteristics

Impact modified, Heat aging stabilized

Injection Molding

PREPROCESSING

Pre/Post-processing, max. allowed water content: .15 %

Pre/Post-processing, Pre-drying, Temperature: 80 °C

Pre/Post-processing, Pre-drying, Time: 4 h

PROCESSING

injection molding, Melt temperature, range: 280 - 300 °C

injection molding, Melt temperature, recommended: 290 °C

injection molding, Mold temperature, range: 80 - 90 °C

injection molding, Mold temperature, recommended: 80 °C

injection molding, Dwell time, thermoplastics: 10 min