

Ixef® 1002
PARA-GF30

Syensqo


Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Modulus	11500	MPa	ISO 527
Stress at Break	190	MPa	ISO 527
Strain at Break	2	%	ISO 527
Flexural Modulus (23°C)	11500	MPa	ISO 178
ASTM Data			
Notched Impact Strength (Izod), 1/8 in	70	J/m	ASTM D 256
Impact Strength (Izod), 1/8 in	460	J/m	ASTM D 256
Thermal Properties			
ISO Data			
Temp. of deflection under load (1.80 MPa)	230	°C	ISO 75-1/-2
Coeff. of Linear Therm. Expansion, parallel	18	E-6/K	ISO 11359-1/-2
Burning Behav. at thickness h	HB	class	UL 94
Oxygen index	25	%	ISO 4589-1/-2
Electrical Properties			
ISO Data			
Volume Resistivity	1E11	Ohm*m	IEC 62631-3-1
Electric Strength	30	kV/mm	IEC 60243-1
Comparative tracking index	400	-	IEC 60112
Other Properties			
ISO Data			
Density	1430	kg/m³	ISO 1183
Processing Recommendation Injection Molding			
Pre-drying - Temperature	120	°C	-
Pre-drying - Time	0.5 - 1.5	h	-
Melt temperature	280	°C	-
Mold temperature	120 - 140	°C	-
Zone 1	250 - 260	°C	-
Zone 2	260 - 290	°C	-

Ixef® 1002 PARA-GF30


Syensqo

Diagrams

Stress-strain

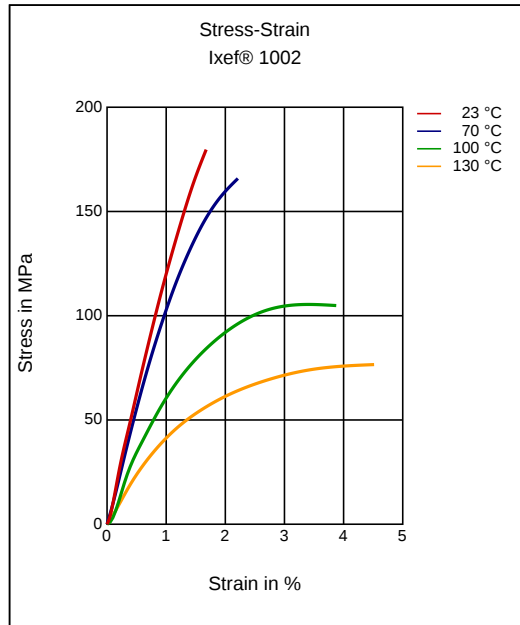

Secant modulus-strain

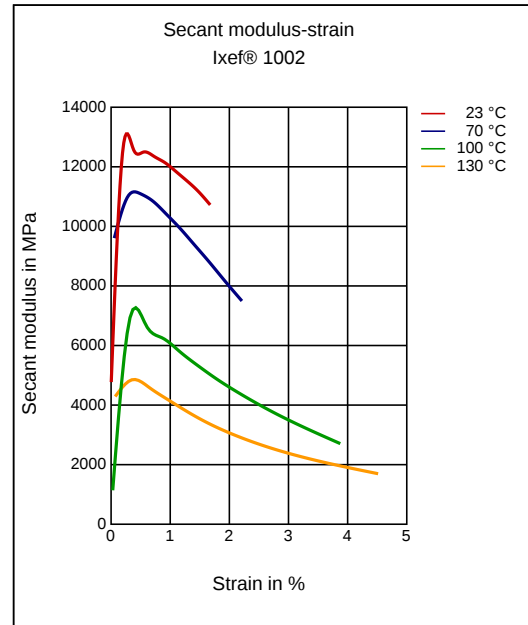

Characteristics

Processing

Injection Molding

Delivery form

Pellets, Black, Natural Color

Features

Creep Resistance

Chemical Resistance

General Chemical Resistance

Applications

General Purpose