

Pocan® T7391 000000
(PBT+PET)-GF45

Envalior

Injection Molding, 45% Glass Reinforced, Excellent Surface Properties

ISO 1043 (PBT+PET)-GF45

Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	30	cm ³ /10min	ISO 1133
Temperature	260	°C	-
Load	5	kg	-
Molding shrinkage, parallel	0.2	%	ISO 294-4, 2577
Molding shrinkage, normal	0.8	%	ISO 294-4, 2577

Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Modulus	16000	MPa	ISO 527
Stress at Break	160	MPa	ISO 527
Strain at Break	1.9	%	ISO 527
Tensile Creep Modulus, 1h	16500	MPa	ISO 899-1
Tensile Creep Modulus, 1000h	15000	MPa	ISO 899-1
Impact Strength (Charpy), +23°C	60	kJ/m ²	ISO 179/1eU
Impact Strength (Charpy), -30°C	65	kJ/m ²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	10	kJ/m ²	ISO 179/1eA
Notched Impact Strength (Charpy), -30°C	10	kJ/m ²	ISO 179/1eA
Puncture - maximum force, +23°C	775	N	ISO 6603-2
Puncture energy, +23°C	3.5	J	ISO 6603-2

Thermal Properties	Value	Unit	Test Standard
ISO Data			
Temp. of deflection under load (1.80 MPa)	205	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	225	°C	ISO 75-1/-2
Coeff. of Linear Therm. Expansion, parallel	20	E-6/K	ISO 11359-1/-2
Coeff. of Linear Therm. Expansion, normal	80	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	HB	class	UL 94
Thickness tested	1.5	mm	-
Oxygen index	21	%	ISO 4589-1/-2

Electrical Properties	Value	Unit	Test Standard
ISO Data			
Relative permittivity, 100Hz	4.3	-	IEC 62631-2-1
Relative permittivity, 1MHz	4.2	-	IEC 62631-2-1
Dissipation Factor, 100Hz	20	E-4	IEC 62631-2-1
Dissipation Factor, 1MHz	140	E-4	IEC 62631-2-1
Volume Resistivity	>1E13	Ohm*m	IEC 62631-3-1
Surface Resistivity	>1E15	Ohm	IEC 62631-3-2
Electric Strength	28	kV/mm	IEC 60243-1
Comparative tracking index	275	-	IEC 60112

Other Properties	Value	Unit	Test Standard
ISO Data			
Water Absorption	0.3	%	Sim. to ISO 62
Humidity absorption	0.1	%	Sim. to ISO 62
Density	1690	kg/m ³	ISO 1183

Material Specific Properties	Value	Unit	Test Standard
ISO Data			
Viscosity number	80	cm ³ /g	ISO 307, 1157, 1628

Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	270	°C	ISO 294
Injection Molding, mold temperature	90	°C	ISO 294


Pocan® T7391 000000
(PBT+PET)-GF45

Envalior


Processing Recommendation Injection Molding	Value	Unit	Test Standard
Pre-drying - Temperature	120	°C	-
Pre-drying - Time	4 - 8	h	-
Processing humidity	≤0.02	%	-
Melt temperature	260 - 280	°C	-
Mold temperature	80 - 100	°C	-

Diagrams


Viscosity-shear rate

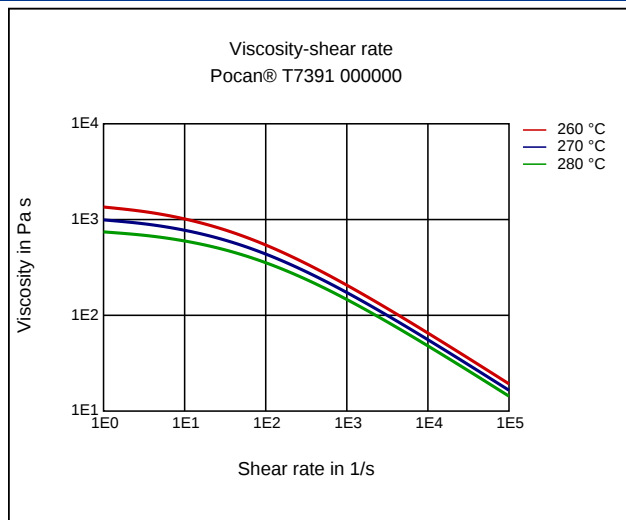


Shearstress-shear rate

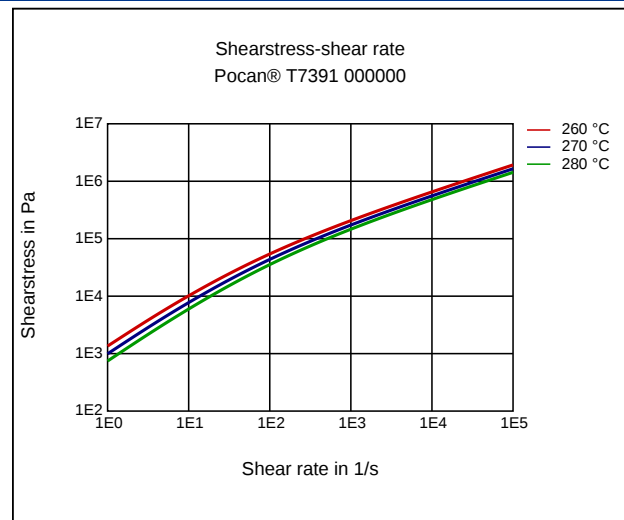

Stress-strain

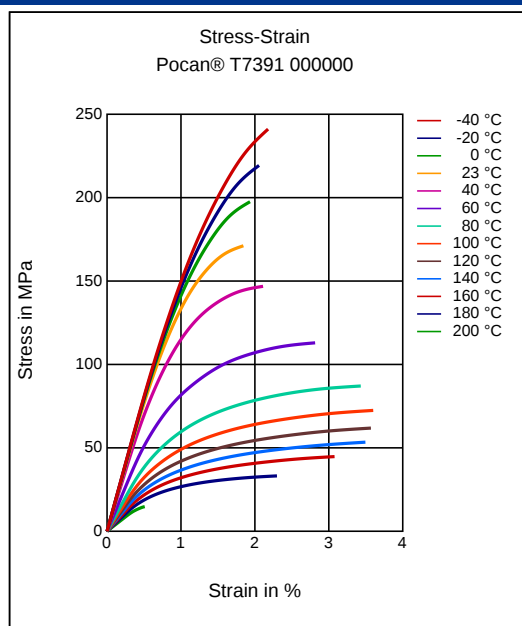


Secant modulus-strain

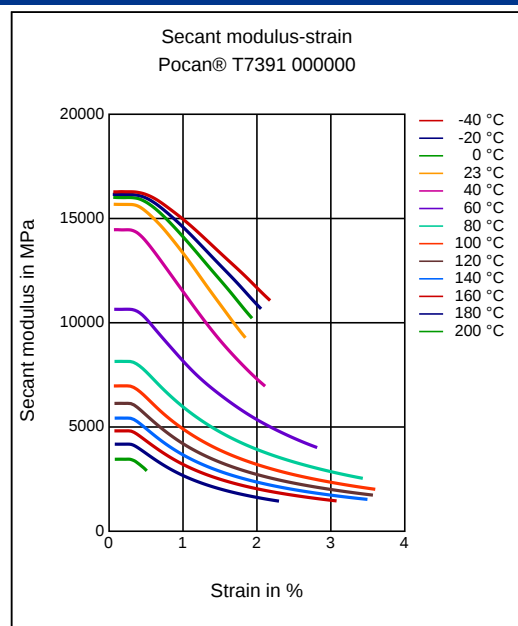


Pocan® T7391 000000
(PBT+PET)-GF45

Envalior


Stress-strain (isochronous) 23°C

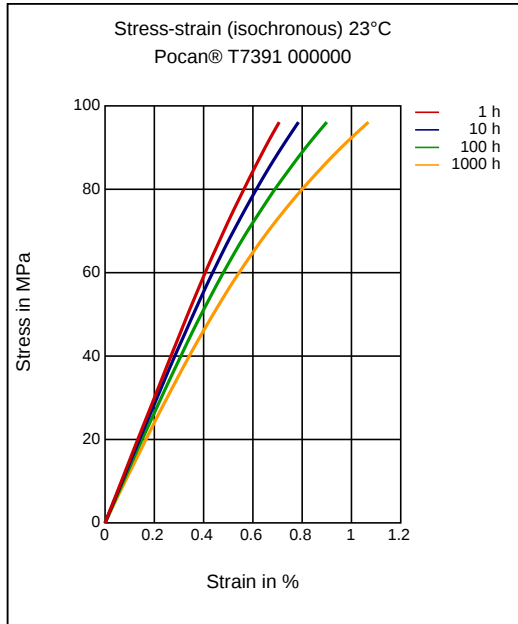


Creep modulus-time 23°C

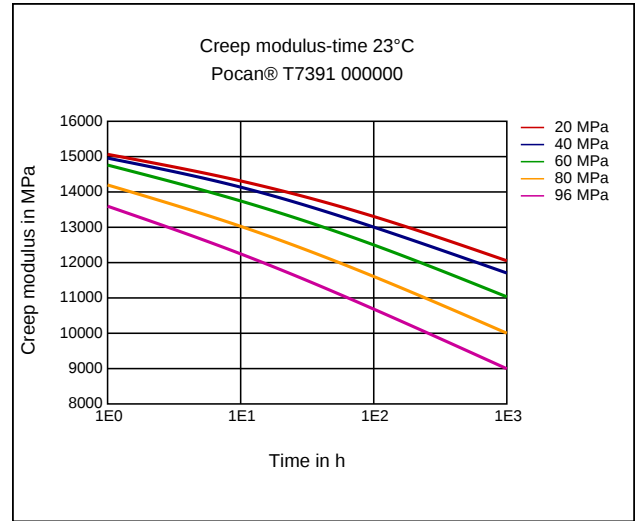

Stress-strain (isochronous) 90°C

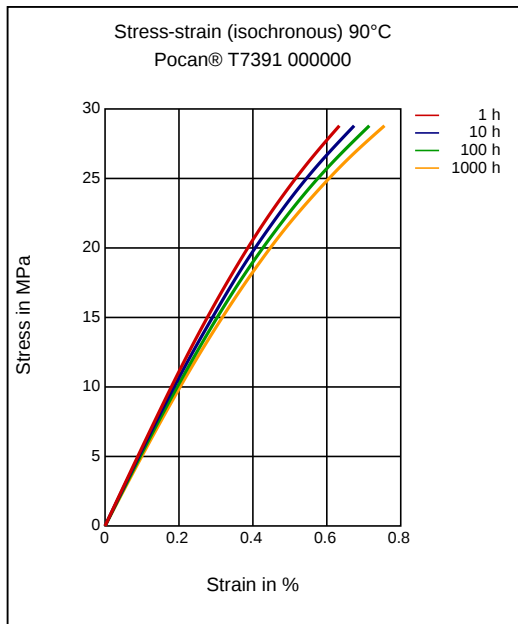


Creep modulus-time 90°C

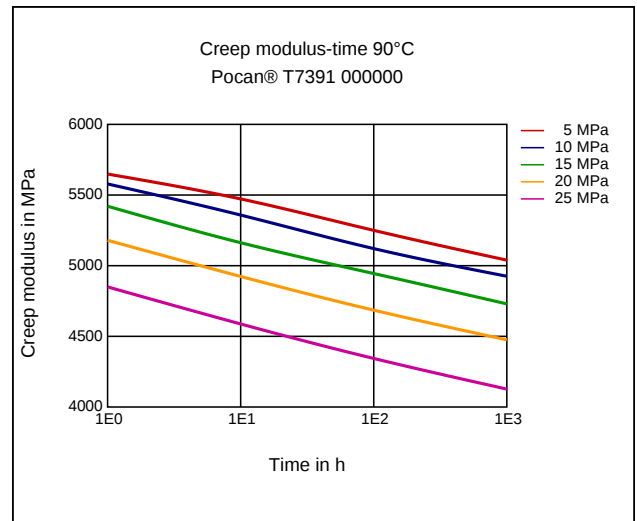


Pocan® T7391 000000
(PBT+PET)-GF45

Envalior

Stress-strain (isochronous) 120 °C

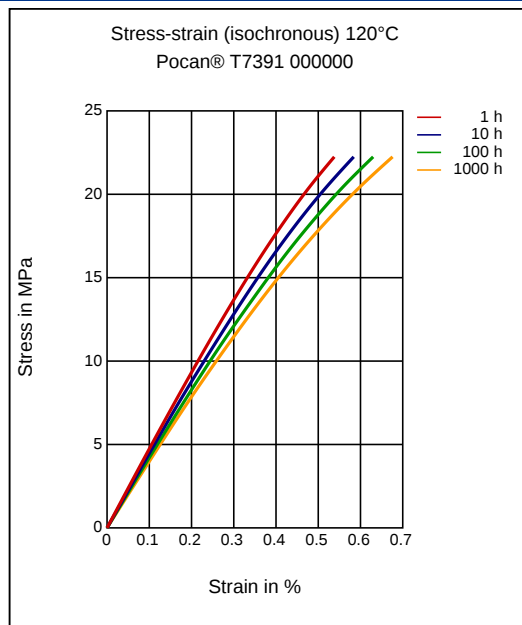

Creep modulus-time 120 °C

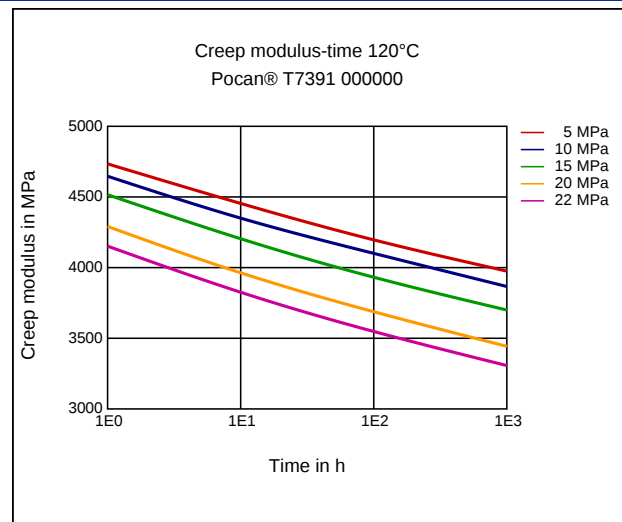

Characteristics

Processing

Injection Molding

Additives

Release agent

Delivery form

Pellets

Special Characteristics

Heat aging stabilized

Injection Molding

PREPROCESSING

Residual moisture content: 0.00 - 0.02 %

Drying temperature circulating air dryer: 120 °C

Drying time circulating air dryer: 4 - 8 h

PROCESSING

Melt temperature (Tmin - Tmax): 260 - 280 °C

Mold temperature: 80 - 100 °C