

Ultradur® B 4300 M5

PBT-MF25

BASF

25 % mineral reinforced injection molding grade for parts with good surface finish and low warpage tendency (e.g. housings and visible partson home appliances).

Abbreviated designation according to ISO 1043: PBT-M25

Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	14	cm ³ /10min	ISO 1133
Temperature	250	°C	-
Load	2.16	kg	-
Molding shrinkage, parallel	1.8	%	ISO 294-4, 2577
Molding shrinkage, normal	1.7	%	ISO 294-4, 2577

Mechanical Properties	Value	Unit	Test Standard
ISO Data			
Tensile Modulus	4000	MPa	ISO 527
Stress at Break	56	MPa	ISO 527
Strain at Break	7.5	%	ISO 527
Tensile Creep Modulus, 1000h	2000	MPa	ISO 899-1
Impact Strength (Charpy), +23°C	100	kJ/m ²	ISO 179/1eU
Impact Strength (Charpy), -30°C	80	kJ/m ²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	4	kJ/m ²	ISO 179/1eA

Thermal Properties	Value	Unit	Test Standard
ISO Data			
Melting Temperature (10°C/min)	223	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	70	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	170	°C	ISO 75-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	HB	class	UL 94
Thickness tested	1.5	mm	-
Burning Behav. at thickness h	HB	class	UL 94
Thickness tested	0.8	mm	-
Oxygen index	21	%	ISO 4589-1/-2

Electrical Properties	Value	Unit	Test Standard
ISO Data			
Relative permittivity, 100Hz	3.6	-	IEC 62631-2-1
Relative permittivity, 1MHz	3.6	-	IEC 62631-2-1
Dissipation Factor, 100Hz	12	E-4	IEC 62631-2-1
Dissipation Factor, 1MHz	150	E-4	IEC 62631-2-1
Volume Resistivity	>1E13	Ohm*m	IEC 62631-3-1
Surface Resistivity	1E13	Ohm	IEC 62631-3-2
Comparative tracking index	225	-	IEC 60112

Other Properties	Value	Unit	Test Standard
ISO Data			
Water Absorption	0.4	%	Sim. to ISO 62
Humidity absorption	0.2	%	Sim. to ISO 62
Density	1510	kg/m ³	ISO 1183

Material Specific Properties	Value	Unit	Test Standard
ISO Data			
Viscosity number	117	cm ³ /g	ISO 307, 1157, 1628

Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	250	°C	ISO 294
Injection Molding, mold temperature	60	°C	ISO 294
Injection Molding, injection velocity	200	mm/s	ISO 294

Ultradur® B 4300 M5
PBT-MF25


BASF

Processing Recommendation Injection Molding


	Value	Unit	Test Standard
Pre-drying - Temperature	80 - 120	°C	-
Pre-drying - Time	4	h	-
Processing humidity	≤0.04	%	-
Melt temperature	250 - 275	°C	-
Mold temperature	40 - 80	°C	-

Diagrams


Viscosity-shear rate

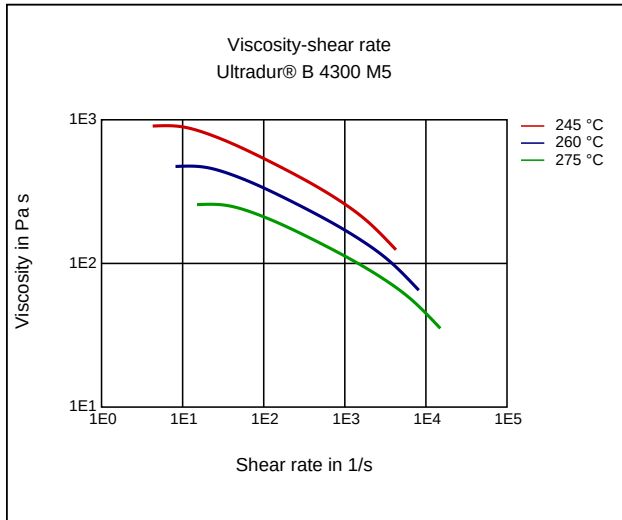


Shearstress-shear rate

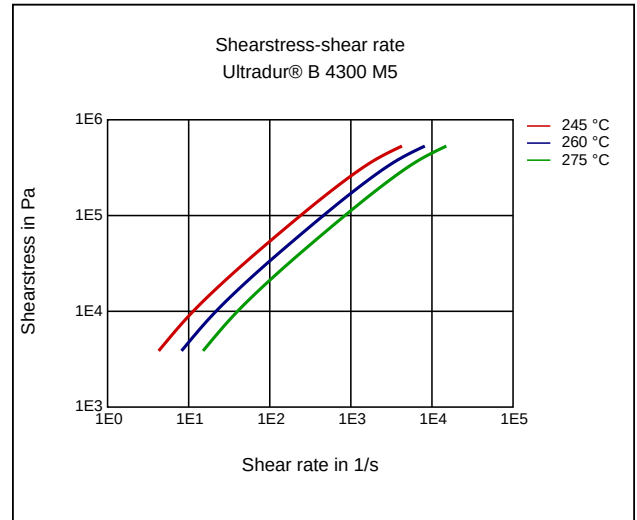

Stress-strain

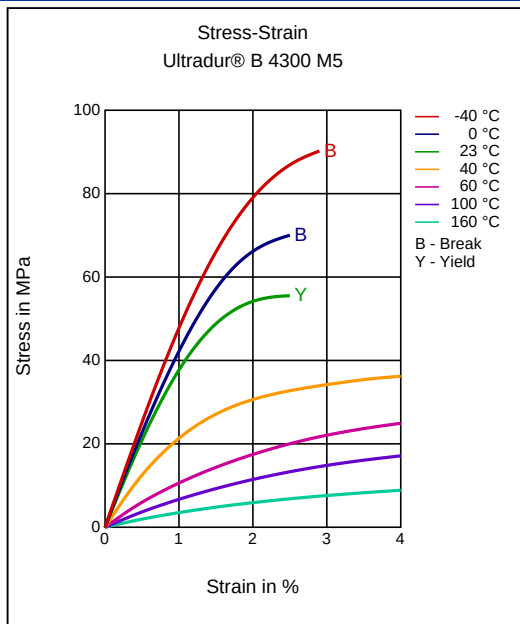


Secant modulus-strain

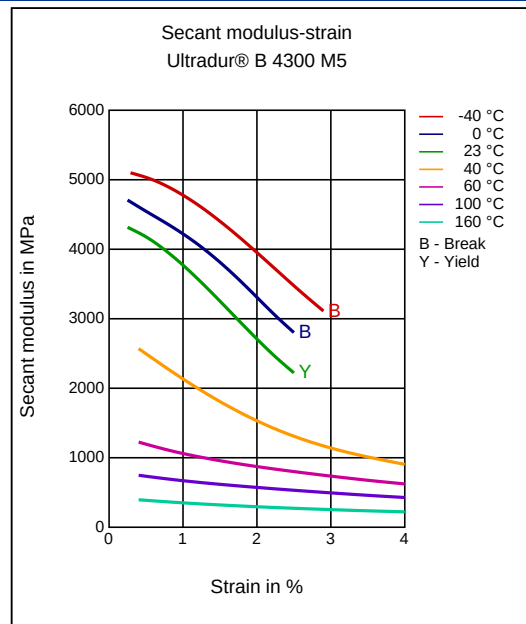


Ultradur® B 4300 M5
PBT-MF25

BASF


Stress-strain (isochronous) 23°C

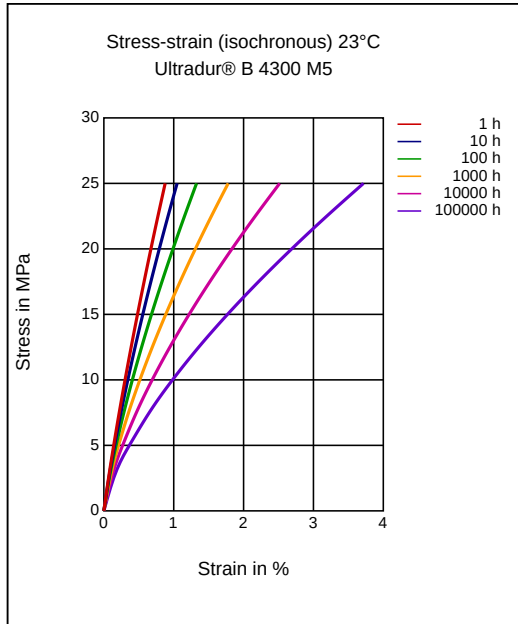


Creep modulus-time 23°C

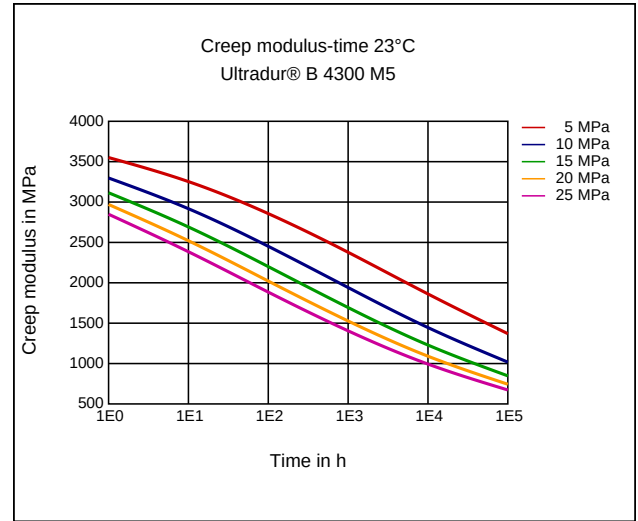

Stress-strain (isochronous) 40°C

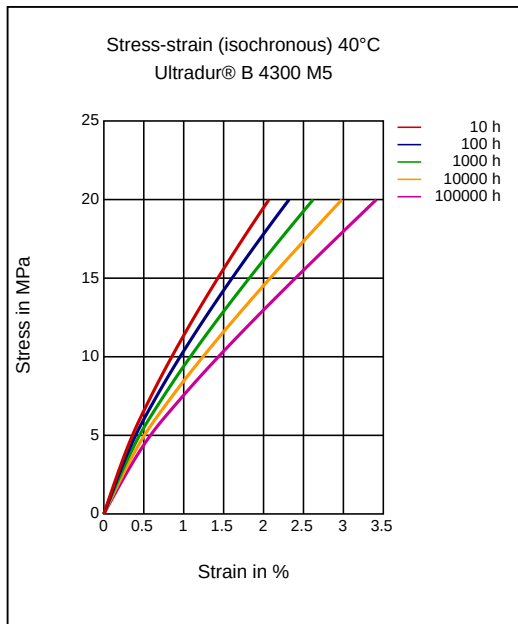


Creep modulus-time 40°C

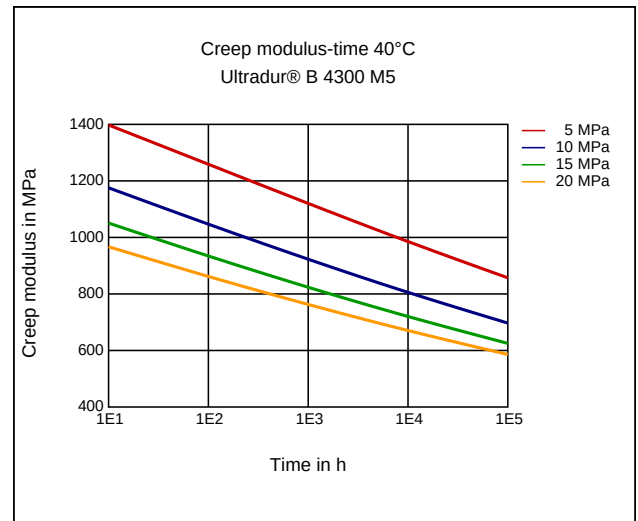


Ultradur® B 4300 M5
PBT-MF25

BASF


Stress-strain (isochronous) 60 °C

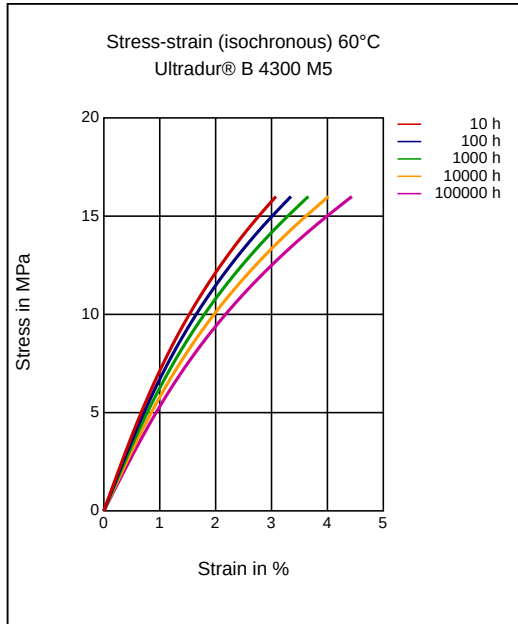


Creep modulus-time 60 °C

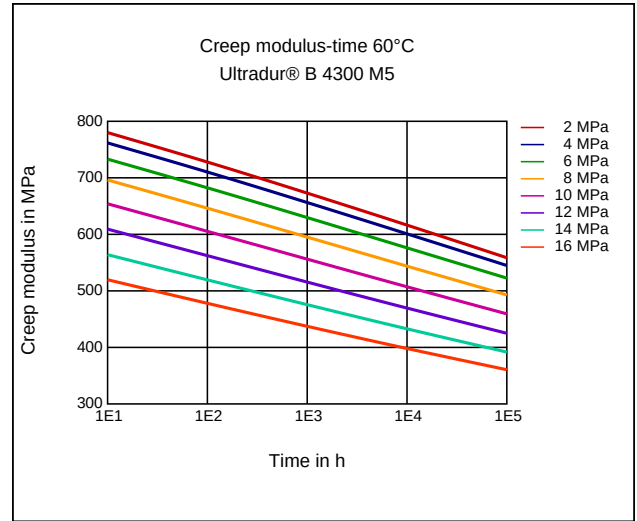

Stress-strain (isochronous) 90 °C

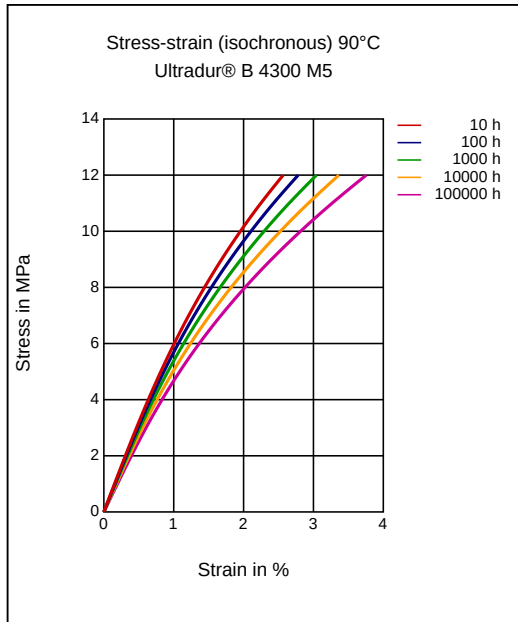


Creep modulus-time 90 °C

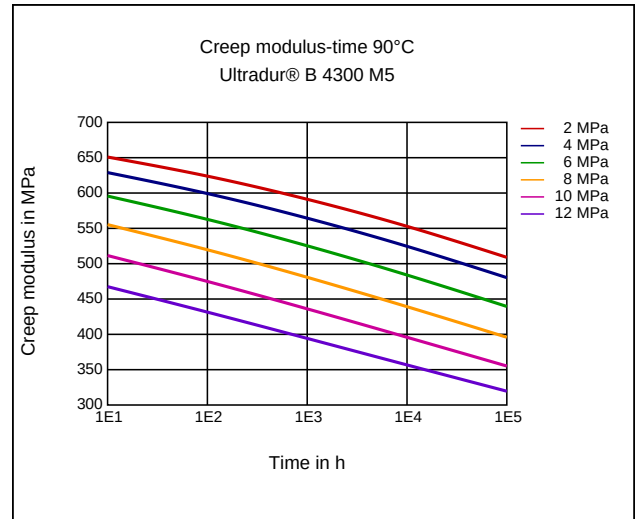


Ultradur® B 4300 M5
PBT-MF25

BASF


Stress-strain (isochronous) 120 °C

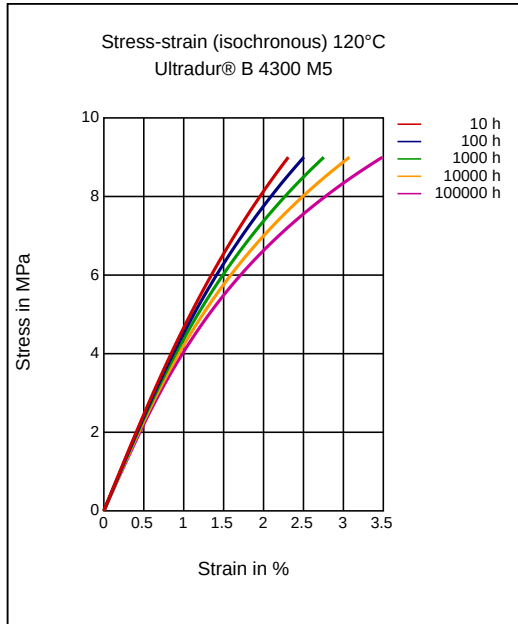


Creep modulus-time 120 °C

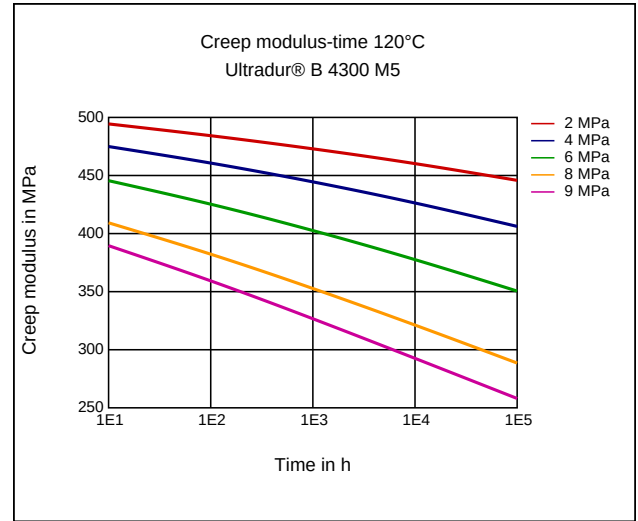

Stress-strain (isochronous) 160 °C

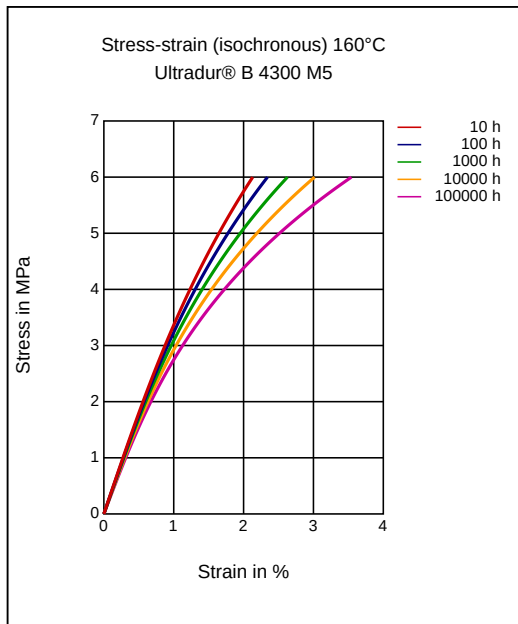

Creep modulus-time 160 °C

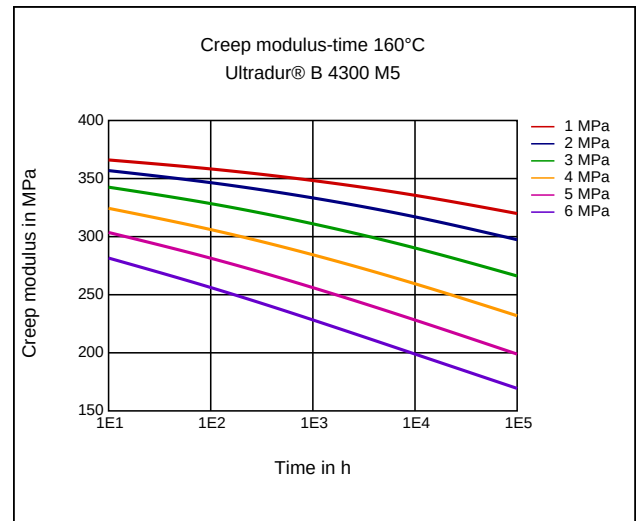


Ultradur® B 4300 M5

PBT-MF25

BASF

Tensile Modulus-Temperature

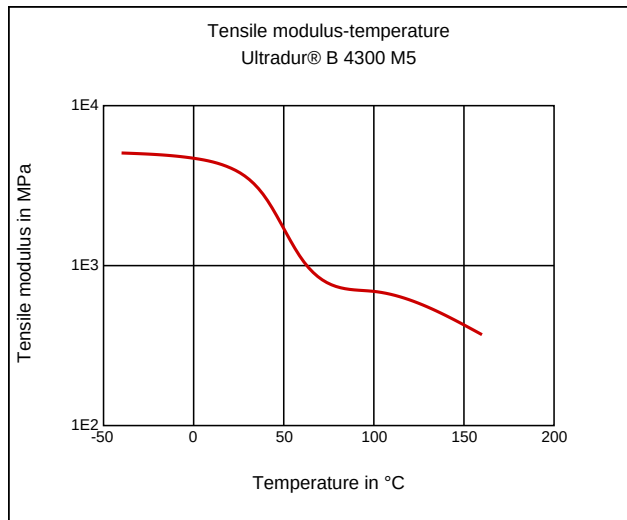

Characteristics

Processing

Injection Molding

Delivery form

Pellets

Additives

Lubricants

Special Characteristics

Light stabilized or stable to light, UV stablized, Heat aging stabilized

Injection Molding

PREPROCESSING

Pre/Post-processing, max. allowed water content: .04 %

Pre/Post-processing, Pre-drying, Temperature: 80 - 120 °C

Pre/Post-processing, Pre-drying, Time: 4 h

PROCESSING

injection molding, Melt temperature, range: 250 - 275 °C

injection molding, Melt temperature, recommended: 250 °C

injection molding, Mold temperature, range: 40 - 80 °C

injection molding, Mold temperature, recommended: 60 °C

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23°C)